


KEMET, FLLD3-MH, EMI/RFI Filters, Noise Suppression, 530 VAC, 75 A, 240x80x135mm

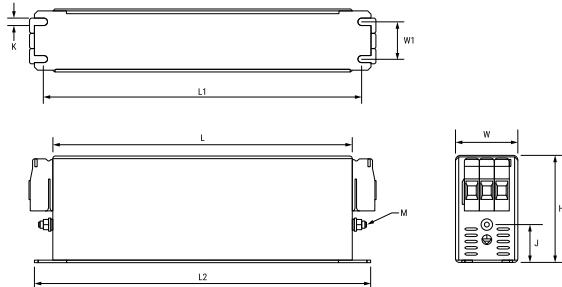

General Information	
<b>Series:</b>	FLLD3-MH
<b>Style:</b>	Chassis Mount
<b>Description:</b>	EMI Filter, Chassis Mount, Motor Drives
<b>Features:</b>	Three Phase, High Performance, High Voltage
<b>Phase:</b>	Three-phase
<b>RoHS:</b>	Yes
<b>Qualifications:</b>	IEC/EN 60939, UL 1283
<b>Terminal Type:</b>	Threaded Studs M6

Dimensions	
<b>L</b>	240mm NOM
<b>W</b>	80mm NOM
<b>H</b>	135mm NOM
<b>L1</b>	255mm NOM
<b>L2</b>	270mm NOM
<b>W1</b>	60mm NOM
<b>J</b>	70mm NOM
<b>K</b>	6.5mm NOM
<b>M (Earth)</b>	Threaded Studs M6

Specifications	
<b>Voltage AC:</b>	530 VAC, 305 VAC
<b>Rated Frequency:</b>	50-60 Hz
<b>Rated Current:</b>	75 A (50°C)
<b>Rated Temperature:</b>	50°C
<b>Temperature Range:</b>	-25/+100°C
<b>Climate Category:</b>	25/100/21
<b>Test Voltage DC (P to P):</b>	2250 VDC
<b>Test Voltage DC (P to E):</b>	3000 VDC
<b>Power Loss:</b>	30 W (25°C 50 Hz)
<b>Leakage Current:</b>	4.7 mA

Packaging Specifications	
<b>Packaging:</b>	Bulk
<b>Packaging Quantity:</b>	1
<b>Component Weight:</b>	3.2 kg

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.