

PKM7000A series DC-DC Converters

Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Key Features

- Industry standard case dimensions
57.91 x 36.8 x 12.7 mm (2.28 x 1.45 x 0.5 in)
- High efficiency, typ. 89% at 24 Vout full load
- 4000 Vdc input to output isolation
- Meets requirements according to IEC/EN/UL 62368-1
- MTBF 4 Mh
- Compliant to EN50155, EN45545-2

General Characteristics

- Input under voltage shutdown
- Monotonic startup
- Remote control
- Output over voltage protection
- Over temperature protection
- Output short-circuit protection
- Output voltage adjust function
- ISO 9001/14001 certified supplier



Safety Approvals



Design for Environment



Meets requirements in high-temperature lead-free soldering processes.

Contents

Ordering Information	2
General Information	2
Safety Specification	3
Absolute Maximum Ratings	4
Electrical Specification	
5 V, 20 A / 100 W	PKM7111API 5
12 V, 8.3 A / 100 W	PKM7113API 8
15 V, 6.67 A / 100 W	PKM7115API 11
24 V, 4.16 A / 100 W	PKM7116ZAPI 14
48 V, 2.08 A / 100 W	PKM7116JAPI 17
54 V, 1.85 A / 100 W	PKM7116HAPI 20
12 V, 12.5 A / 150 W	PKM7213API 23
15 V, 10 A / 150 W	PKM7215API 26
24 V, 6.25 A / 150 W	PKM7216ZAPI 29
48 V, 3.12 A / 150 W	PKM7216JAPI 32
54 V, 2.78 A / 150 W	PKM7216HAPI 35
EMC Specification	38
Operating Information	39
Thermal Consideration	41
Connections	42
Mechanical Information	43
Soldering Information	48
Delivery Information	48
Product Qualification Specification	49

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Ordering Information

Product program	Output
PKM7111API	5 V, 20 A / 100 W
PKM7113API	12 V, 8.3 A / 100 W
PKM7115API	15 V, 6.67 A / 100 W
PKM7116ZAPI	24 V, 4.16 A / 100 W
PKM7116JAPI	48 V, 2.08 A / 100 W
PKM7116HAPI	54 V, 1.85 A / 100 W
PKM7213API	12 V, 12.5 A / 150 W
PKM7215API	15 V, 10 A / 150 W
PKM7216ZAPI	24 V, 6.25 A / 150 W
PKM7216JAPI	48 V, 3.12 A / 150 W
PKM7216HAPI	54 V, 2.78 A / 150 W

Product number and Packaging

PKM7XXXXA n ₁ n ₂ n ₃			
Options	n ₁	n ₂	n ₃
Mounting	o		
Remote Control logic		o	
Baseplate			o

Options	Description	
n ₁	PI	Through hole
n ₂	P	Negative* Positive
n ₃		No heat sink
	LHS	10 mm ¼ brick heat sink(100W)
	LHS	20 mm ½ brick heat sink(150W)
	HS	20 mm ¼ brick heat sink

Example a 150W/24V through-hole mounted, positive logic, standard pin length product with 20mm ½ brick heat sink would be PKM7216ZAPIPLHS

* Standard variant (i.e. no option selected).

General Information

Reliability

The failure rate (λ) and mean time between failures (MTBF= $1/\lambda$) is calculated at max output power and an operating ambient temperature (T_A) of +25°C. Flex uses Telcordia SR-332 Issue 3 Method 1 to calculate the mean steady-state failure rate and standard deviation (σ).

Telcordia SR-332 Issue 3 also provides techniques to estimate the upper confidence levels of failure rates based on the mean and standard deviation.

Mean steady-state failure rate, λ	Std. deviation, σ
237 nFailures/h	107 nFailures/h

MTBF (mean value) for the PKM 7XXXXA series = 4 Mh.
MTBF at 90% confidence level = 3.6 Mh

Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2011/65/EU and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Flex products are found in the Statement of Compliance document.

Flex fulfills and will continuously fulfill all its obligations under regulation (EC) No 1907/2006 concerning the registration, evaluation, authorization and restriction of chemicals (REACH) as they enter into force and is through product materials declarations preparing for the obligations to communicate information on substances in the products.

Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, Six Sigma, and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of the products.

Warranty

Warranty period and conditions are defined in Flex General Terms and Conditions of Sale.

Limitation of Liability

Flex does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

© Flex 2022

The information and specifications in this technical specification is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof. Flex reserves the right to change the contents of this technical specification at any time without prior notice.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Safety Specification**General information**

Flex DC/DC converters and DC/DC regulators are designed in accordance with the safety standards IEC 62368-1, EN 62368-1 and UL 62368-1 *Safety of Information Technology Equipment*.

IEC/EN/UL 62368-1 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Energy hazards
- Fire
- Mechanical and heat hazards
- Radiation hazards
- Chemical hazards

On-board DC/DC converters and DC/DC regulators are defined as component power supplies. As components they cannot fully comply with the provisions of any safety requirements without "conditions of acceptability". Clearance between conductors and between conductive parts of the component power supply and conductors on the board in the final product must meet the applicable safety requirements. Certain conditions of acceptability apply for component power supplies with limited stand-off (see Mechanical Information and Safety Certificate for further information). It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable safety standards and regulations for the final product.

Component power supplies for general use should comply with the requirements in IEC/EN/UL 62368-1 *Safety of Information Technology Equipment*. Product related standards, e.g. IEEE 802.3af *Power over Ethernet*, and ETS-300132-2 *Power interface at the input to telecom equipment, operated by direct current (dc)* are based on IEC/EN/UL 62368-1 with regards to safety.

Flex DC/DC converters, Power interface modules and DC/DC regulators are UL 62368-1 recognized and certified in accordance with EN 62368-1. The flammability rating for all construction parts of the products meet requirements for V-0 class material according to IEC 60695-11-10, *Fire hazard testing, test flames* – 50 W horizontal and vertical flame test methods.

Isolated DC/DC converters & Power interface modules

The product may provide basic or functional insulation between input and output according to IEC/EN/UL 62368-1 (see Safety Certificate), different conditions shall be met if the output of a basic or a functional insulated product shall be considered as safety extra low voltage (SELV).

For basic insulated products (see Safety Certificate) the

output is considered as safety extra low voltage (SELV) if one of the following conditions is met:

- The input source provides supplementary or double or reinforced insulation from the AC mains according to IEC/EN/UL 62368-1.
- The input source provides functional or basic insulation from the AC mains and the product's output is reliably connected to protective earth according to IEC/EN/UL 62368-1.

For functional insulated products (see Safety Certificate) the output is considered as safety extra low voltage (SELV) if one of the following conditions is met:

- The input source provides double or reinforced insulation from the AC mains according to IEC/EN/UL 62368-1.
- The input source provides basic or supplementary insulation from the AC mains and the product's output is reliably connected to protective earth according to IEC/EN/UL 62368-1.
- The input source is reliably connected to protective earth and provides basic or supplementary insulation according to IEC/EN/UL 62368-1 and the maximum input source voltage is 60 Vdc.

Galvanic isolation between input and output is verified in an electric strength test and the isolation voltage (V_{iso}) meets the voltage strength requirement for basic insulation according to IEC/EN/UL 62368-1.

It is recommended to use a slow blow fuse at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter. In the rare event of a component problem that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the fault from the input power source so as not to affect the operation of other parts of the system
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Absolute Maximum Ratings

Characteristics			min	typ	max	Unit
T _{P1}	Operating Temperature (see Thermal Consideration section)		-40		+105	°C
T _S	Storage temperature		-55		+125	°C
V _I	Input voltage		60		160	V
C _{out}	Output capacitance			200		μF
V _{iso}	Isolation voltage (input to output)				4000	Vdc
V _{iso}	Isolation voltage (input to baseplate)				2250	Vdc
V _{iso}	Isolation voltage (baseplate to output)				1500	Vdc
V _{tr}	Input voltage transient (tp 1s)				200	V
V _{adj}	Adjust pin voltage (see Operating Information section)		0		1.15xV _o	V
V _{RC}	Remote Control pin voltage (see Operating Information section)	Positive logic option	0		8	V
		Negative logic option	0		8	V

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the Electrical Specification section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Fundamental Circuit Diagram

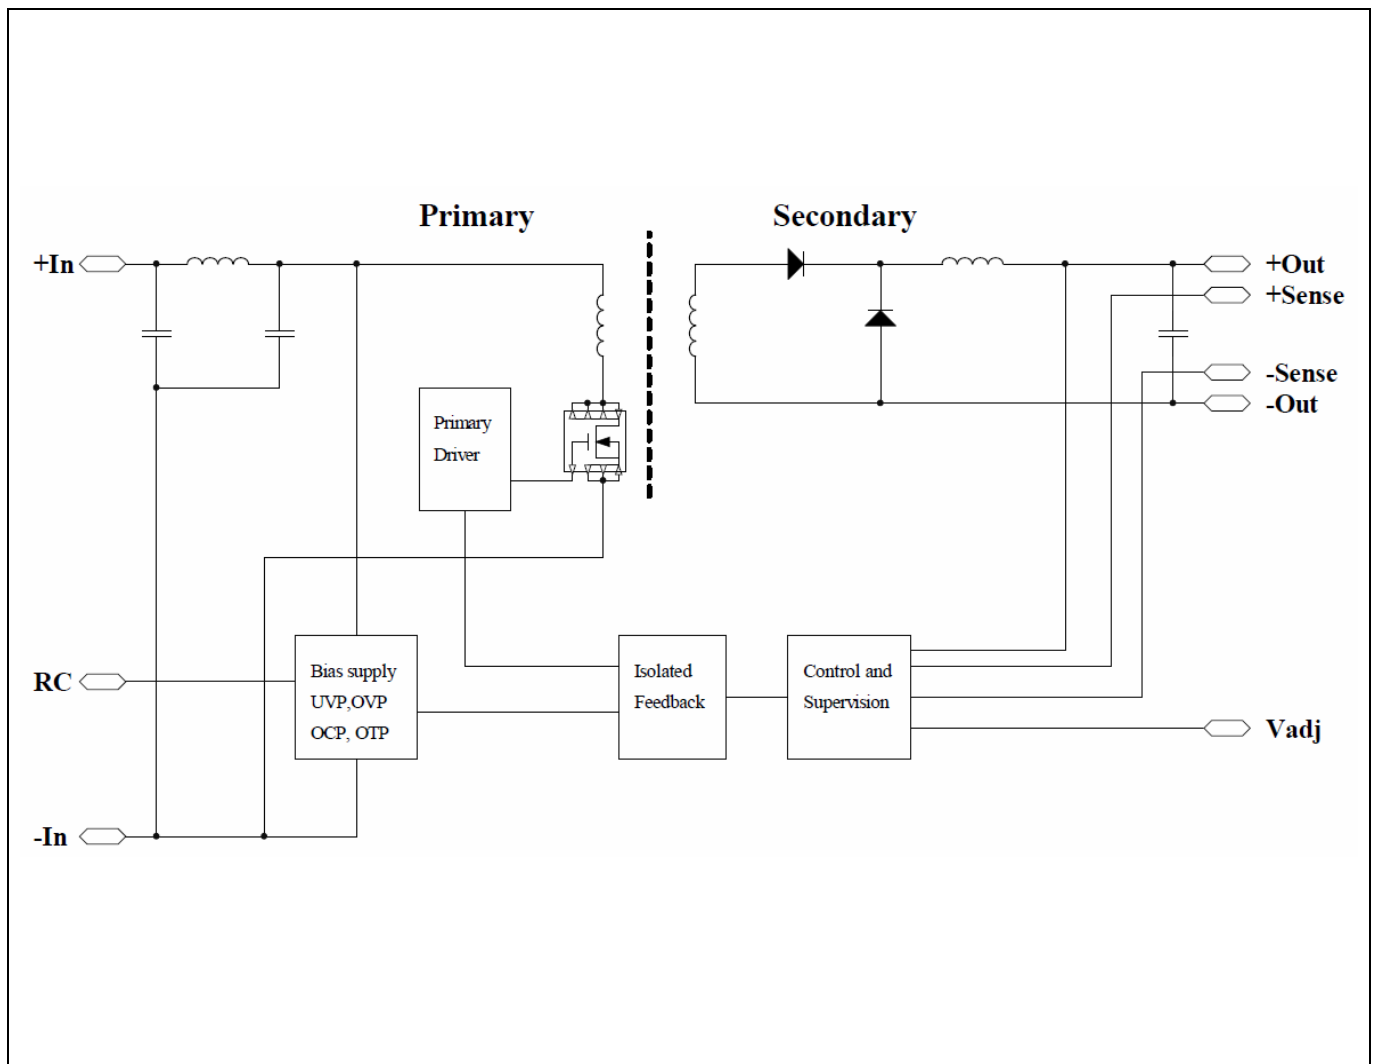

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification

PKM7111API(P)

5 V, 20 A / 100 W

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, max I_O , unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_i	Internal input capacitance			47		μF
P_O	Output power		0		100	W
η	Efficiency	50% of max I_O		85		%
		max I_O		87		
		50% of max I_O , $V_I = 110$ V		85		
		max I_O , $V_I = 110$ V		87		
P_d	Power Dissipation	max I_O		18	25	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		5		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	238	280	322	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 20$ A	4.94	5	5.06	V
V_O	Output adjust range	See operating information	4.5	5	5.5	V
	Output voltage tolerance band	0-100% of max I_O	4.75		5.25	V
	Idling voltage	$I_O = 0$ A	4.75		5.25	V
	Line regulation	max I_O		10	25	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		20	50	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 170	± 500	mV
t_{tr}	Load transient recovery time			50	500	μs
t_r	Ramp-up time (from 10-90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.5	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		20	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		32	40	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.04	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		35	100	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		7		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

5 V, 20 A / 100 W


PKM7111API(P)

Efficiency

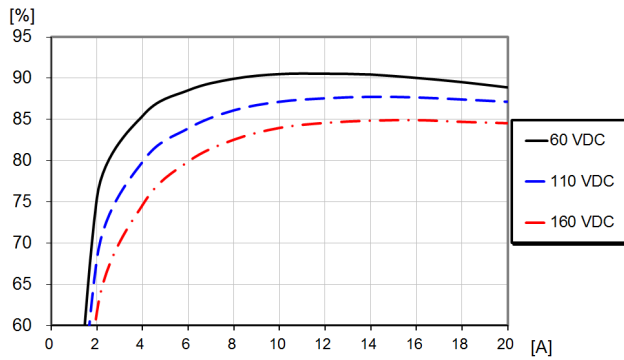


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

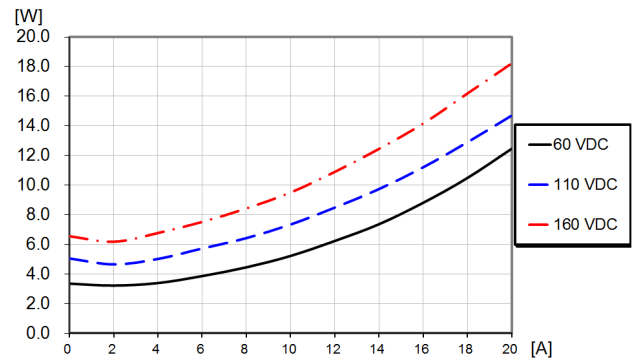


Dissipated power vs. load current and input voltage at +25°C.


Current Limit Characteristics

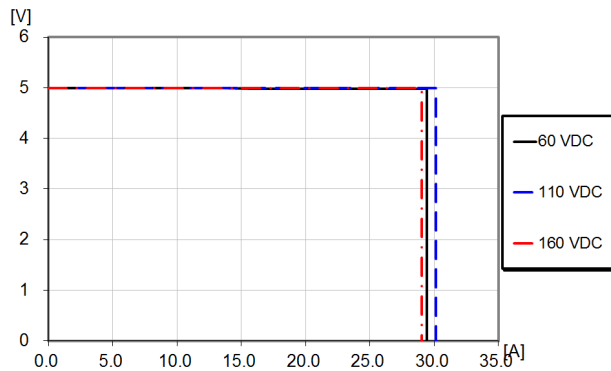Output voltage vs. load current at $I_O > \max I_O$ at +25°C.

Output Current Derating (10mm ¼ brick heat sink)

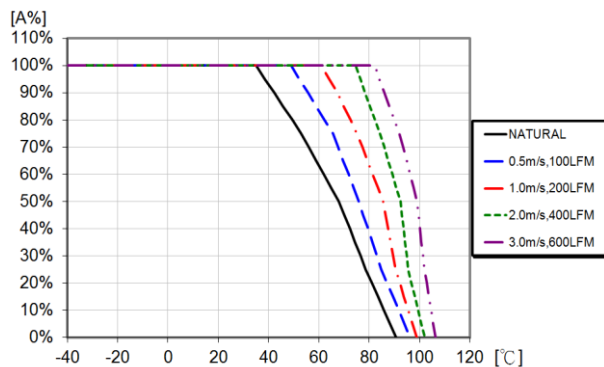Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ¼ brick heat sink)

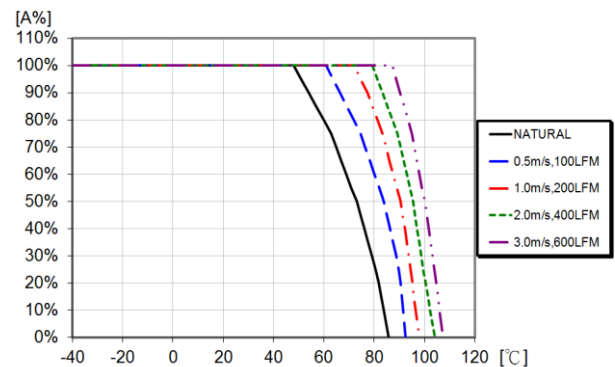Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

5 V, 20 A / 100 W

PKM7111API(P)

Start-up

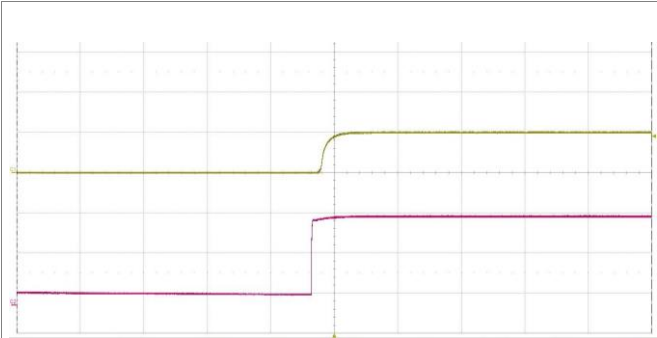
Start-up enabled by connecting V_i at: $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$, $I_o = 20\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (50 ms/div.).

Shut-down

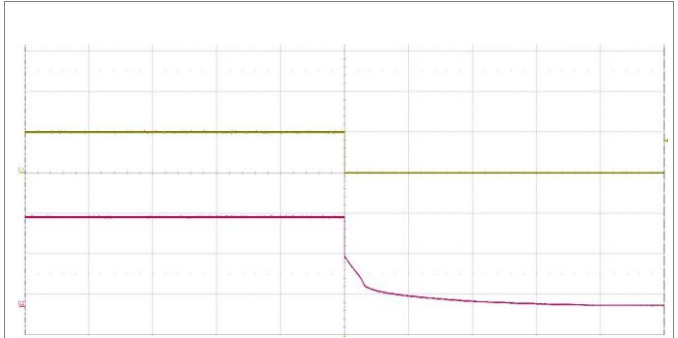
Start-up enabled by connecting V_i at: $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$, $I_o = 20\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (1 s/div.).

Output Ripple & Noise

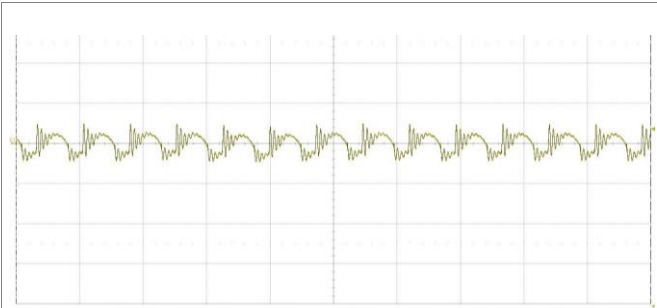


Output voltage ripple at:

 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$, $I_o = 20\text{ A}$ resistive load.

Trace: output voltage (100 mV/div.).

Time scale: (5 μs /div.).

Output Load Transient Response

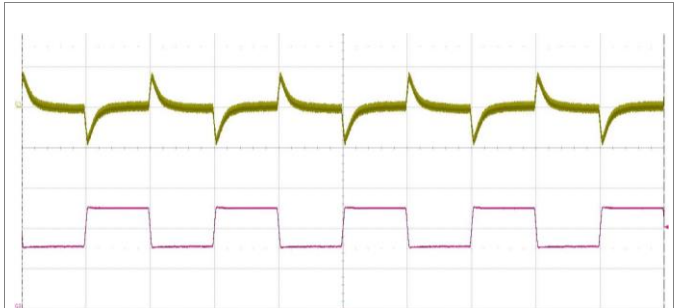Output voltage response to load current step-
change (10-15-10 A) at: $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$.

Trace: output voltage (200 mV/div.).

Bottom trace: load current (5 A/div.).

Time scale: (1ms/div.).

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using

the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times V_{o,\text{set}} \times (100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{\text{desired}} - V_{o,\text{set}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage Adjust, Decrease:

$$R_{\text{TRIM_DOWN}} = \left(\frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{o,\text{set}} - V_{\text{desired}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage = 5.0 V

Example:

To trim up the 5.0V model by 8% to 5.4V the required external resistor is:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times 5.0 \times (100 + 8)}{1.225 \times 8} - \frac{511}{8} - 10.22 \right) = 207.48 \text{ k}\Omega$$

$$\Delta\% = \left(\frac{5.4 - 5.0}{5.0} \right) \times 100 = 8$$

Example:

To trim down the 5.0V model by 7% to 4.65V the required external resistor is:

$$R_{\text{TRIM_DOWN}} = \left(\frac{511}{7} - 10.22 \right) = 62.78 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification

PKM7113API(P)

12 V, 8.3 A / 100 W

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, max I_O , unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_i	Internal input capacitance			47		μF
P_O	Output power		0		100	W
η	Efficiency	50% of max I_O		87		%
		max I_O		89		
		50% of max I_O , $V_I = 110$ V		87		
		max I_O , $V_I = 110$ V		89		
P_d	Power Dissipation	max I_O		11	15	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		5		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	238	280	322	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 8.3$ A	11.856	12	12.144	V
V_O	Output adjust range	See operating information	10.8	12	13.2	V
	Output voltage tolerance band	0-100% of max I_O	11.5		12.5	V
	Idling voltage	$I_O = 0$ A	11.5		12.5	V
	Line regulation	max I_O		10	60	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		20	120	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 377	± 1000	mV
t_{tr}	Load transient recovery time			70	500	μs
t_r	Ramp-up time (from 10-90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.5	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		8.3	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		13	16	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.04	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		16	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		15		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

12 V, 8.3 A / 100 W


PKM7113API(P)

Efficiency

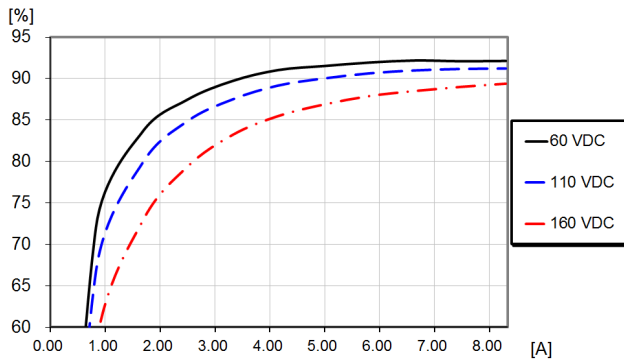


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

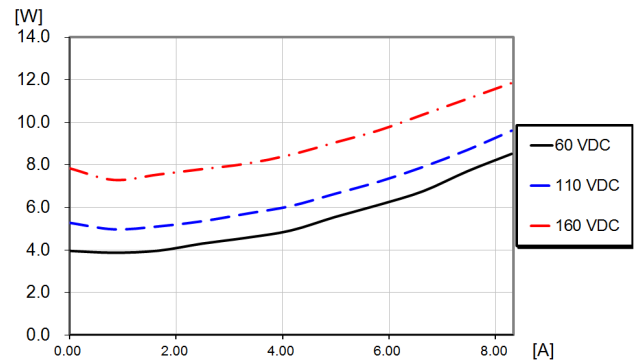


Dissipated power vs. load current and input voltage at +25°C.


Current Limit Characteristics

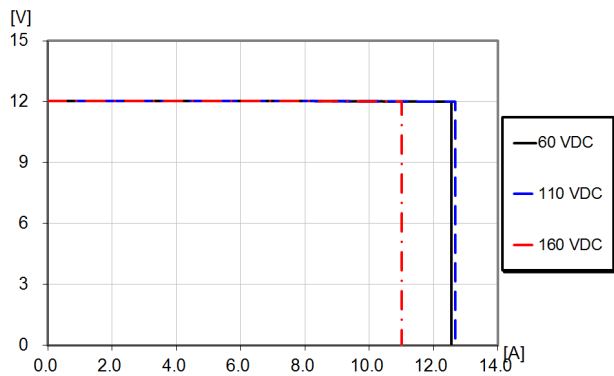Output voltage vs. load current at $I_o > \max I_o$ at +25°C.

Output Current Derating (10mm ¼ brick heat sink)

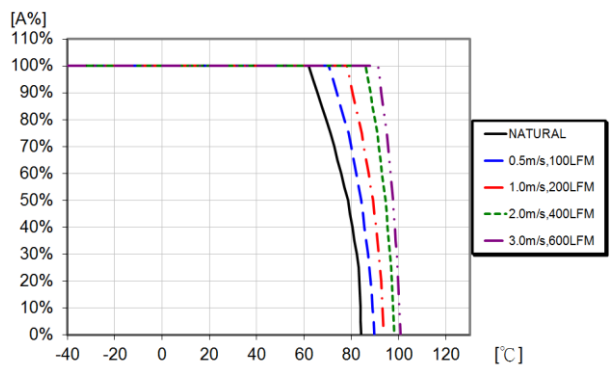Available load current vs. ambient air temperature and airflow at $V_i = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ¼ brick heat sink)

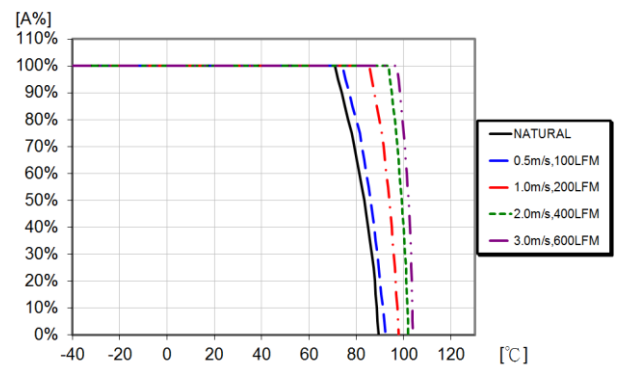Available load current vs. ambient air temperature and airflow at $V_i = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

12 V, 8.3 A / 100 W

PKM7113API(P)

Start-up

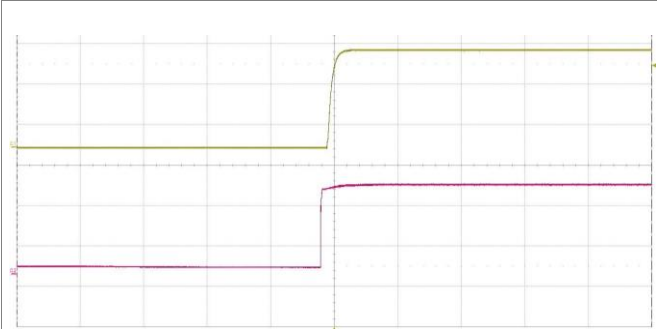
Start-up enabled by connecting V_I at: $T_{P1} = +25^\circ\text{C}$, $V_I = 110\text{ V}$, $I_O = 8.3\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (50 ms/div.).

Shut-down

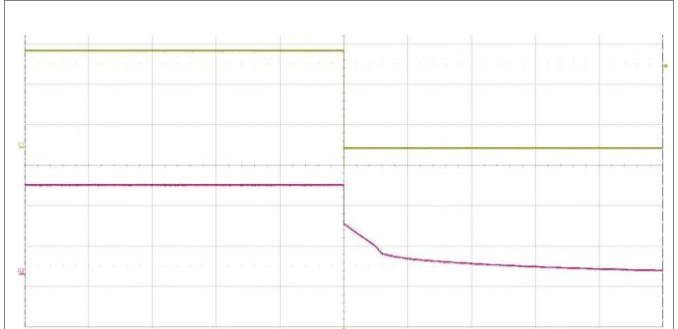
Start-up enabled by connecting V_I at: $T_{P1} = +25^\circ\text{C}$, $V_I = 110\text{ V}$, $I_O = 8.3\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (500 ms/div.).

Output Ripple & Noise

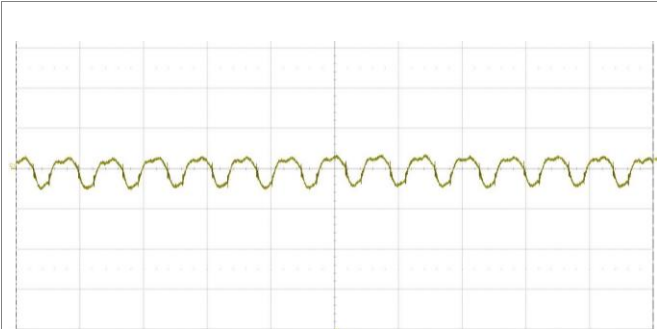


Output voltage ripple at:

 $T_{P1} = +25^\circ\text{C}$, $V_I = 110\text{ V}$, $I_O = 8.3\text{ A}$ resistive load.

Trace: output voltage (50 mV/div.).

Time scale: (5 μs /div.).

Output Load Transient Response

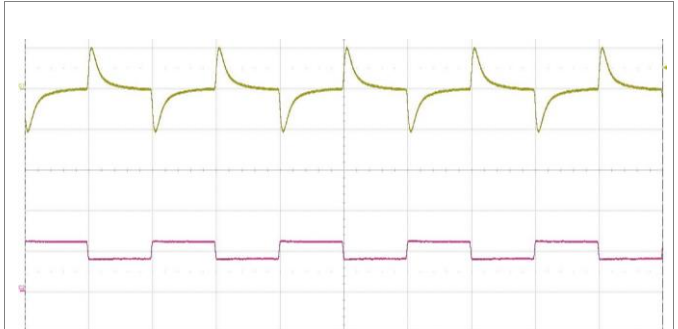Output voltage response to load current step-
change (4.15-6.225-4.15 A) at: $T_{P1} = +25^\circ\text{C}$, $V_I = 110\text{ V}$.

Trace: output voltage (500 mV/div.).

Bottom trace: load current (5 A/div.).

Time scale: (1ms/div.).

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using

the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times V_{o,\text{set}} \times (100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{\text{desired}} - V_{o,\text{set}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage Adjust, Decrease:

$$R_{\text{TRIM_DOWN}} = \left(\frac{5.11}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{o,\text{set}} - V_{\text{desired}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage = 12 V

Example:

To trim up the 12V model by 8% to 12.96V the required external resistor is:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times 12 \times (100 + 8)}{1.225 \times 8} - \frac{511}{8} - 10.22 \right) = 601.68 \text{ k}\Omega$$

$$\Delta\% = \left(\frac{12.96 - 12}{12} \right) \times 100 = 8$$

Example:

To trim down the 12V model by 7% to 11.16V the required external resistor is:

$$R_{\text{TRIM_DOWN}} = \left(\frac{5.11}{7} - 10.22 \right) = 62.78 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification
15 V, 6.67 A / 100 W

PKM7115API(P)

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, max I_O , unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_i	Internal input capacitance			47		μF
P_O	Output power		0		100	W
η	Efficiency	50% of max I_O		87		%
		max I_O		89		
		50% of max I_O , $V_I = 110$ V		87		
		max I_O , $V_I = 110$ V		89		
P_d	Power Dissipation	max I_O		15	25	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		5		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	238	280	322	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 6.67$ A	14.82	15	15.18	V
V_O	Output adjust range	See operating information	13.5	15	16.5	V
	Output voltage tolerance band	0-100% of max I_O	14.5		15.5	V
	Idling voltage	$I_O = 0$ A	14.5		15.5	V
	Line regulation	max I_O		10	75	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		20	150	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 377	± 1000	mV
t_{tr}	Load transient recovery time			70	500	μs
t_r	Ramp-up time (from 10-90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.5	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		6.67	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		10	12	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.04	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		44	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		18		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

15 V, 6.67 A / 100 W


PKM7115API(P)

Efficiency

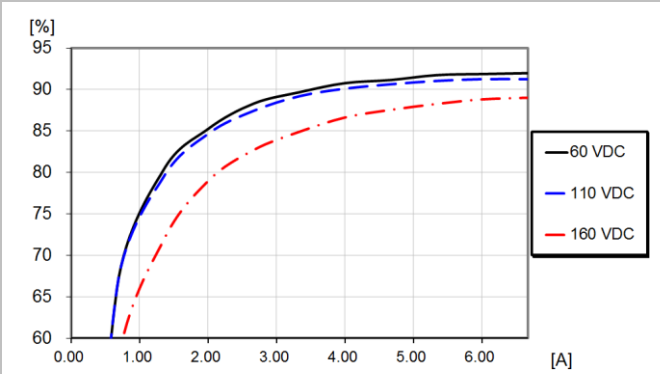


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

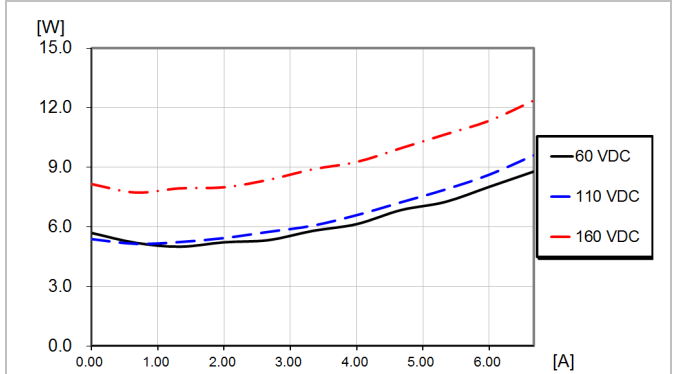


Dissipated power vs. load current and input voltage at +25°C.


Current Limit Characteristics

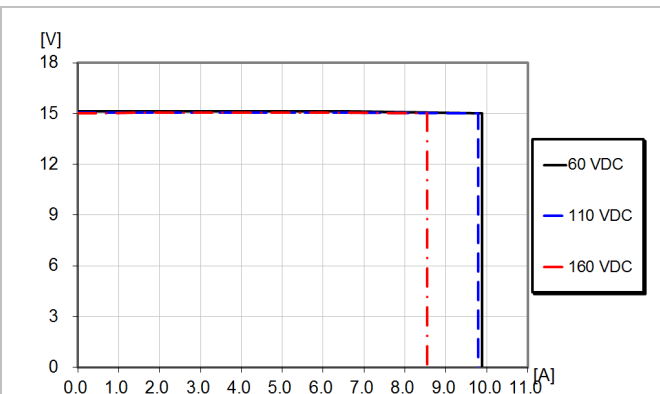Output voltage vs. load current at $I_O > \max I_O$ at +25°C.

Output Current Derating (10mm ¼ brick heat sink)

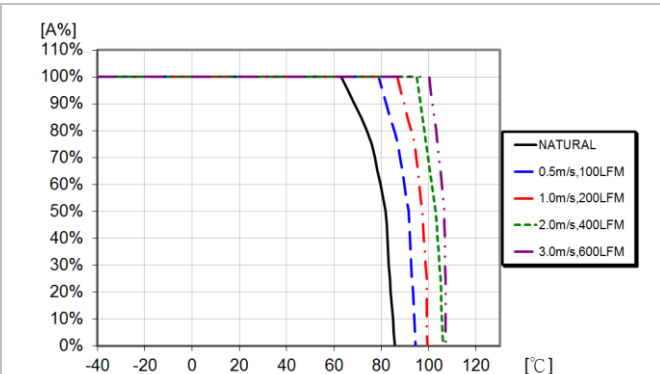Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ¼ brick heat sink)

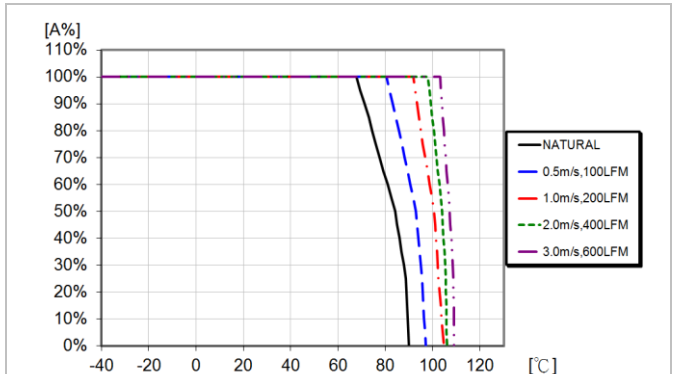Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W


28701-BMR711 Rev. M

March 2022

© Flex

Typical Characteristics

15 V, 6.67 A / 100 W

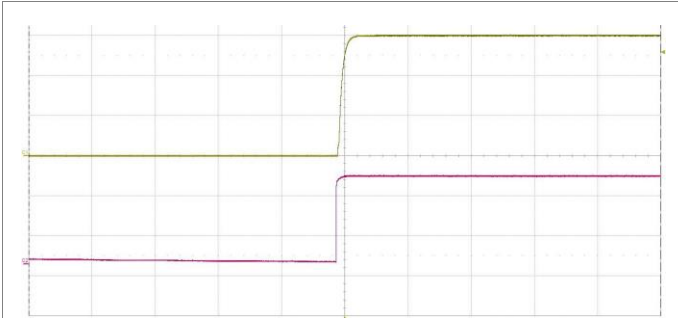
PKM7115API(P)**Start-up**Start-up enabled by connecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 6.67\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (200 ms/div.).

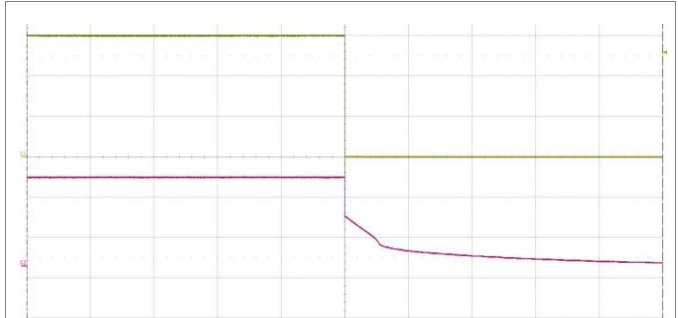
Shut-downStart-up enabled by connecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 6.67\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (500 ms/div.).

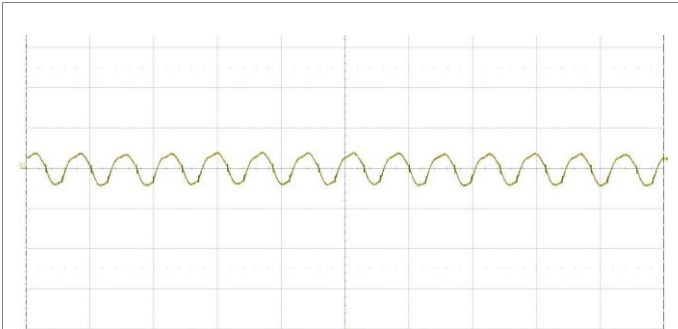
Output Ripple & Noise

Output voltage ripple at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 6.67\text{ A}$ resistive load.

Trace: output voltage (50 mV/div.).

Time scale: (5 μs/div.).

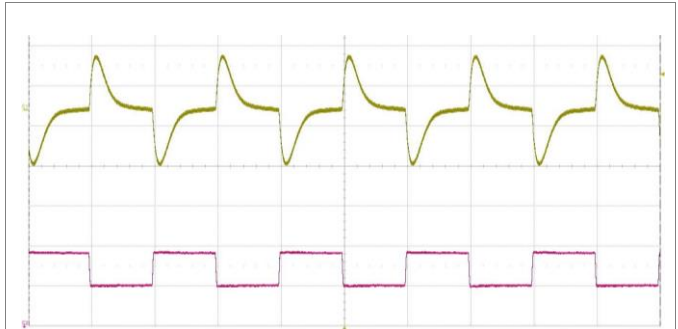Output Load Transient Response

Output voltage response to load current

step-change (3.335-5.003-3.335 A) at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$.

Trace: output voltage (500 mV/div.).

Bottom trace: load current (2 A/div.).

Time scale: (1ms/div.).

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times V_{o,\text{set}} \times (100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{o,\text{desired}} - V_{o,\text{set}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage Adjust, Decrease:

$$R_{\text{TRIM_DOWN}} = \left(\frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{o,\text{set}} - V_{o,\text{desired}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage=15V

Example:

To trim up the 15V model by 8% to 16.2V the required external resistor is:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times 15 \times (100 + 8)}{1.225 \times 8} - \frac{511}{8} - 10.22 \right) = 770.62 \text{ k}\Omega$$

$$\Delta\% = \left(\frac{16.2 - 15}{15} \right) \times 100 = 8$$

Example:

To trim down the 15V model by 7% to 13.95V the required external resistor is:

$$R_{\text{TRIM_DOWN}} = \left(\frac{511}{7} - 10.22 \right) = 62.78 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters Input 60-160 V, Output up to 20 A / 150 W	28701-BMR711 Rev. M	March 2022
	© Flex	

Electrical Specification

PKM7116ZAPI(P)

24 V, 4.16 A / 100 W

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, max I_O , unless otherwise specified under Conditions.

Additional $C_{in} = 47$ μF , $C_{out} = 10$ μF ceramic Cap. + 22 μF E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{Ioff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{Ion}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_I	Internal input capacitance			47		μF
P_O	Output power		0		100	W
η	Efficiency	50% of max I_O		87		%
		max I_O		89		
		50% of max I_O , $V_I = 110$ V		87		
		max I_O , $V_I = 110$ V		89		
P_d	Power Dissipation	max I_O		13	17	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		1.0		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	297.5	350	402.5	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 4.16$ A	23.70	24	24.30	V
V_O	Output adjust range	See operating information	21.6	24	26.4	V
	Output voltage tolerance band	0-100% of max I_O	23.4		24.6	V
	Idling voltage	$I_O = 0$ A	23.4		24.6	V
	Line regulation	max I_O		10	120	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		20	240	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 377	± 1000	mV
t_{tr}	Load transient recovery time			70	500	μs
t_r	Ramp-up time (from 10-90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.5	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		4.16	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		9	11	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.04	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		30.7	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		28		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W


28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics




24 V, 4.16 A / 100 W

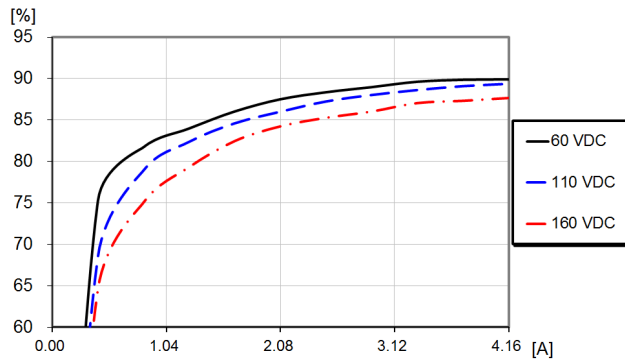PKM7116ZAPI(P)**Efficiency**

Efficiency vs. load current and input voltage at +25°C.

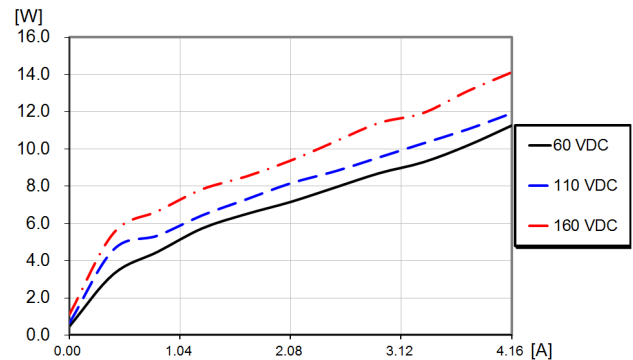Power Dissipation

Dissipated power vs. load current and input voltage at +25°C.

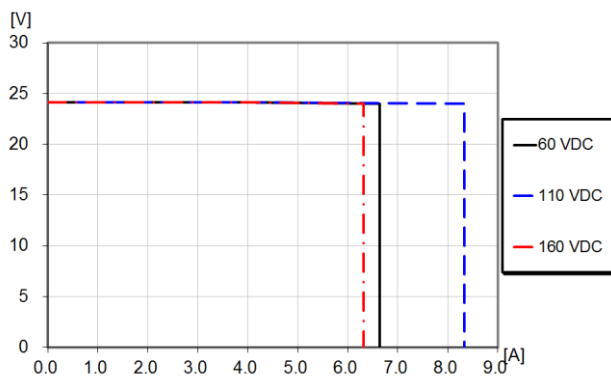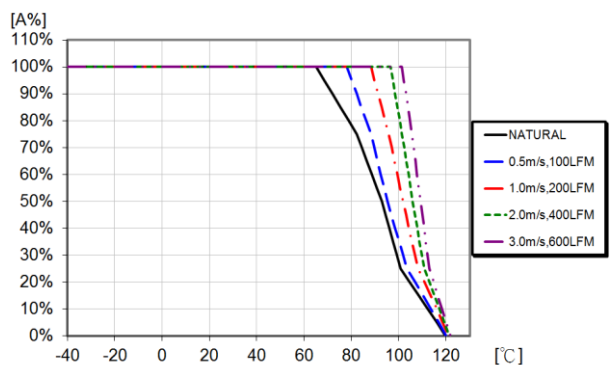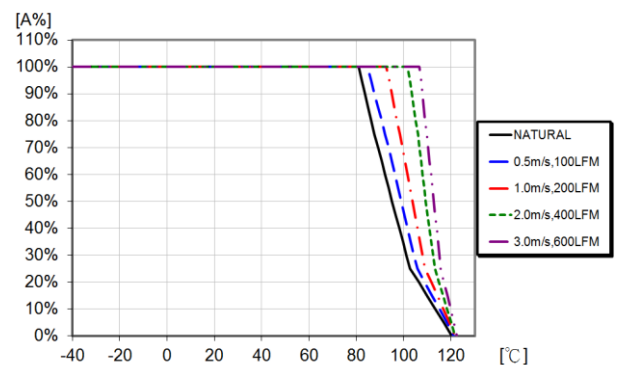Current Limit CharacteristicsOutput voltage vs. load current at $I_O > \max I_O$ at +25°C.**Output Current Derating (10mm ¼ brick heat sink)**Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.**Output Current Derating (20mm ¼ brick heat sink)**Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

24 V, 4.16 A / 100 W

PKM7116ZAPI(P)


Start-up

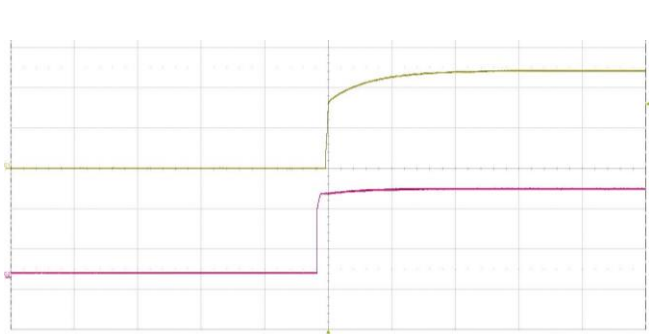

Start-up enabled by connecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 4.16\text{ A}$ resistive load.

Top trace: output voltage (10 V/div.).
Bottom trace: input voltage (50 V/div.).
Time scale: (20 ms/div.).


Shut-down

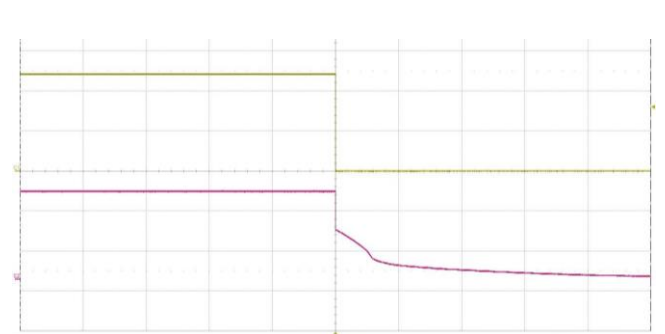

Start-up enabled by connecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 4.16\text{ A}$ resistive load.

Top trace: output voltage (10 V/div.).
Bottom trace: input voltage (50 V/div.).
Time scale: (500 ms/div.).


Output Ripple & Noise

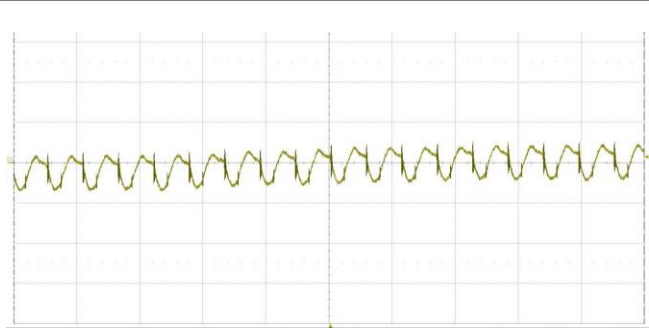

Output voltage ripple at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 4.16\text{ A}$ resistive load.

Trace: output voltage (20 mV/div.).
Time scale: (5 μs /div.).

Output Load Transient Response

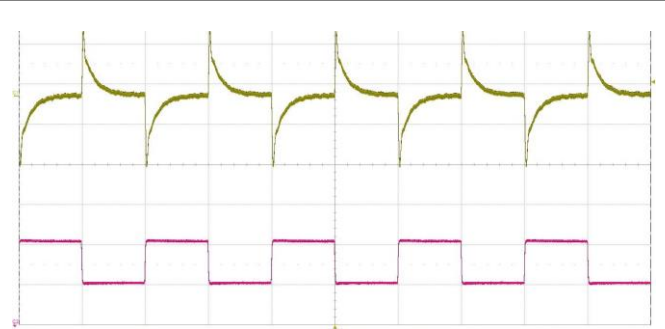

Output voltage response to load current step-change (2.08-3.12-2.08 A) at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$.

Trace: output voltage (200 mV/div.).
Bottom trace: load current (1 A/div.).
Time scale: (1ms/div.).

Output Voltage Adjust (see operating information)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{ADJ_UP}} = \left(\frac{14.6061}{\Delta} - 120 \right) \text{ k}\Omega$$

Output Voltage Adjust, Decrease:

$$R_{\text{ADJ_DOWN}} = \left(\frac{17.2133}{\Delta} - 151.819 \right) \text{ k}\Omega$$

Output Voltage = 24 V

Example:

To trim up the 24V model by 8% to 25.92V the required external resistor is:

$$R_{\text{ADJ_UP}} = \left(\frac{14.6061}{0.08} - 120 \right) = 62.58 \text{ k}\Omega$$

Example:

To trim down the 24V model by 7% to 22.32V the required external resistor is:

$$R_{\text{ADJ_DOWN}} = \left(\frac{17.2133}{0.07} - 151.819 \right) = 94.08 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification
48 V, 2.08 A / 100 W

PKM7116JAPI(P)

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = \text{max } I_O$, unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_I	Internal input capacitance			47		μF
P_O	Output power		0		100	W
η	Efficiency	50% of max I_O		87		%
		max I_O		89		
		50% of max I_O , $V_I = 110$ V		87		
		max I_O , $V_I = 110$ V		89		
P_d	Power Dissipation	max I_O		12	16	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		1.0		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	297.5	350	402.5	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 2.08$ A	47.4	48	48.6	V
V_O	Output adjust range	See operating information	43.2	48	52.8	V
	Output voltage tolerance band	0-100% of max I_O	46.8		49.2	V
	Idling voltage	$I_O = 0$ A	46.8		49.2	V
	Line regulation	max I_O		24	240	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		48	480	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 400	± 1000	mV
t_{tr}	Load transient recovery time			90	500	μs
t_r	Ramp-up time (from 10–90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.55	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		2.08	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		3.2	5.2	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.05	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		500	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		272	300	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		55		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M


March 2022

© Flex

Typical Characteristics 48 V, 2.08 A / 100 W


PKM7116JAPI(P)

Efficiency

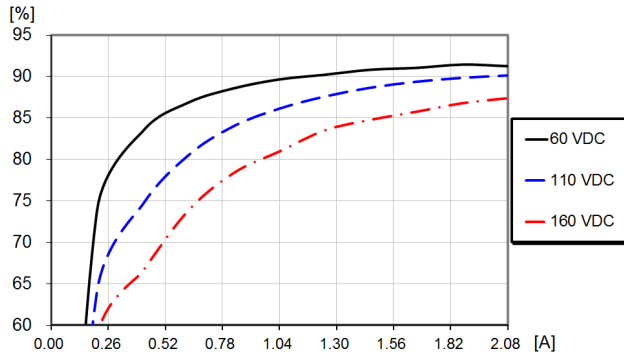


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

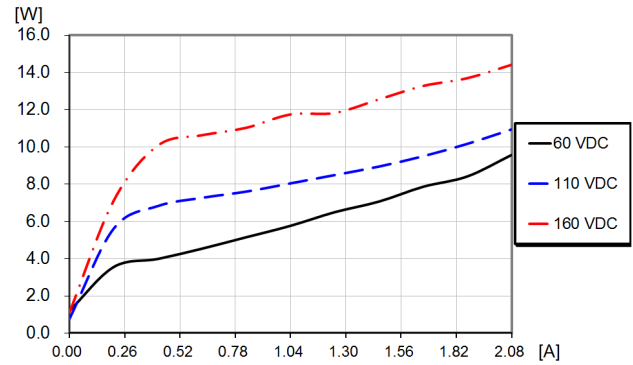


Dissipated power vs. load current and input voltage at +25°C.

Current Limit Characteristics

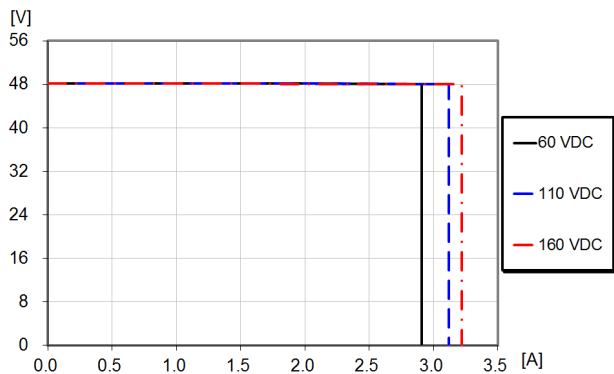


Output voltage vs. load current at $I_O > \max I_O$ at +25°C.

Output Current Derating (10mm ¼ brick heat sink)

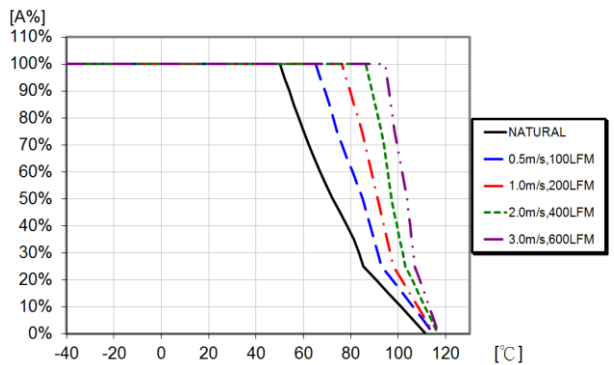

Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ¼ brick heat sink)

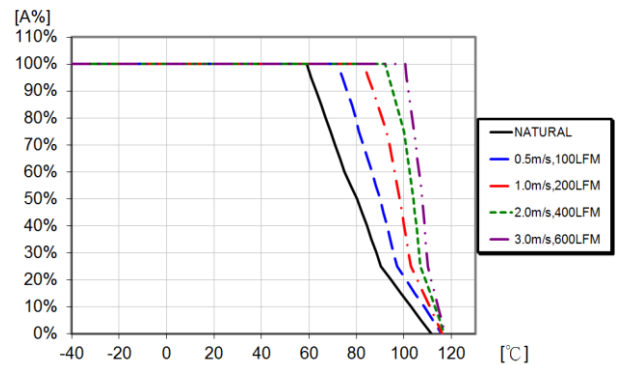

Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W


28701-BMR711 Rev. M

March 2022

© Flex

Typical Characteristics


48 V, 2.08 A / 100 W

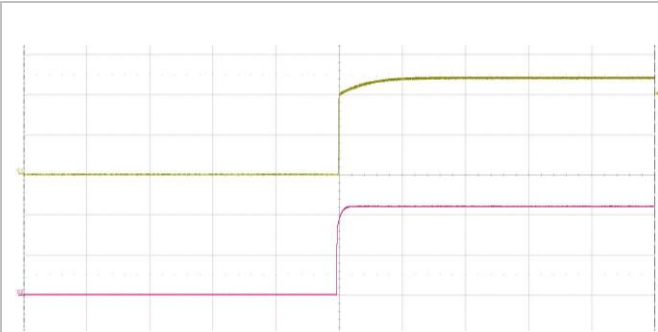PKM7116JAPI(P)**Start-up**Start-up enabled by connecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 2.08\text{ A}$ resistive load.

Top trace: output voltage (20 V/div.).


Bottom trace: input voltage (50 V/div.).
Time scale: (200 ms/div.).

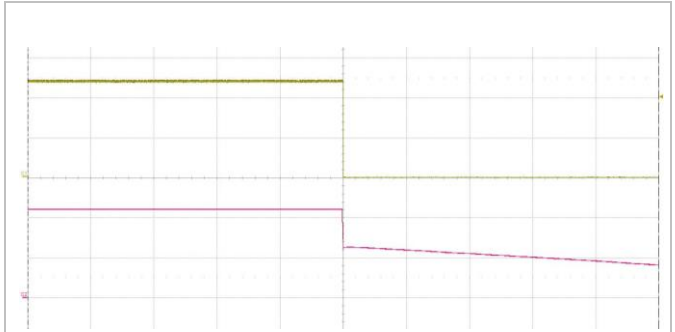Shut-downShut-down enabled by disconnecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 2.08\text{ A}$ resistive load.

Top trace: output voltage (20 V/div.).


Bottom trace: input voltage (50 V/div.).
Time scale: (200 ms/div.).

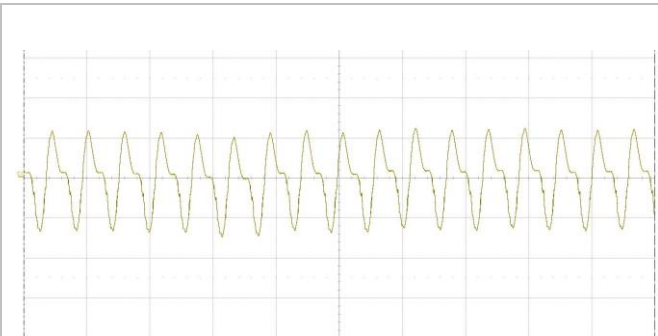Output Ripple & Noise

Output voltage ripple at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 2.08\text{ A}$ resistive load.

Trace: output voltage (100 mV/div.).

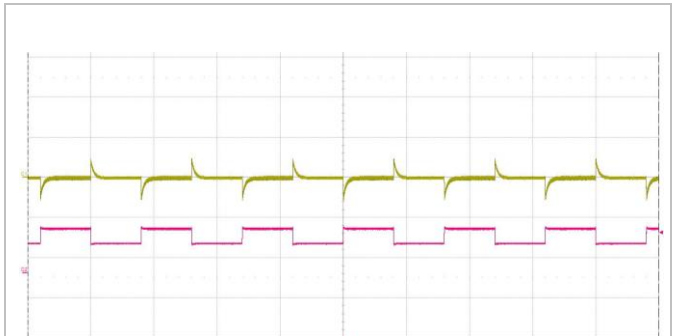Time scale: (5 μs /div.).**Output Load Transient Response**

Output voltage response to load current step- Top trace: output voltage (2 V/div.).

change (1.04-1.56-1.04 A) at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$.

Bottom trace: load current (1 A/div.).

Time scale: (10ms/div.).

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{ADJ_UP}} = \left(\frac{29.2214}{\Delta} - 240 \right) \text{ k}\Omega$$

Output Voltage Adjust, Decrease:

$$R_{\text{ADJ_DOWN}} = \left(\frac{34.4607}{\Delta} - 303.682 \right) \text{ k}\Omega$$

Output Voltage = 48 V

Example:

To trim up the 48V model by 8% to 51.84V the required external resistor is:

$$R_{\text{ADJ_UP}} = \left(\frac{29.2214}{0.08} - 240 \right) = 125.27 \text{ k}\Omega$$

Example:

To trim down the 48V model by 7% to 44.64V the required external resistor is:

$$R_{\text{ADJ_DOWN}} = \left(\frac{34.4607}{0.07} - 303.682 \right) = 188.61 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification
54 V, 1.85 A / 100 W

PKM7116HAPI(P)

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, max I_O , unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_i	Internal input capacitance			47		μF
P_O	Output power		0		100	W
η	Efficiency	50% of max I_O , $V_I = 110$ V		89		%
		max I_O , $V_I = 110$ V		90		
P_d	Power Dissipation	max I_O		10	18	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		1.0		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	297.5	350	402.5	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 2.78$ A	53.352	54	54.648	V
V_O	Output adjust range	See operating information	48.6	54	59.4	V
	Output voltage tolerance band	0-100% of max I_O	52.38		55.62	V
	Idling voltage	$I_O = 0$ A	52.38		55.62	V
	Line regulation	max I_O		150	270	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		300	540	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 800	± 1000	mV
t_{tr}	Load transient recovery time			50	500	μs
t_r	Ramp-up time (from 10-90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.5	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		1.85	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		2.8	3.7	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		1.0	2.0	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		100	200	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		62		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

54 V, 1.85 A / 100 W


PKM7116HAPI(P)

Efficiency

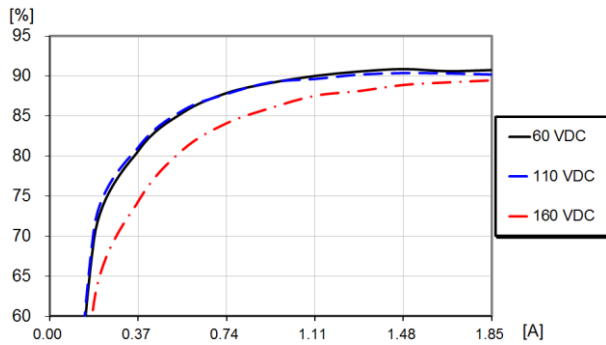


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

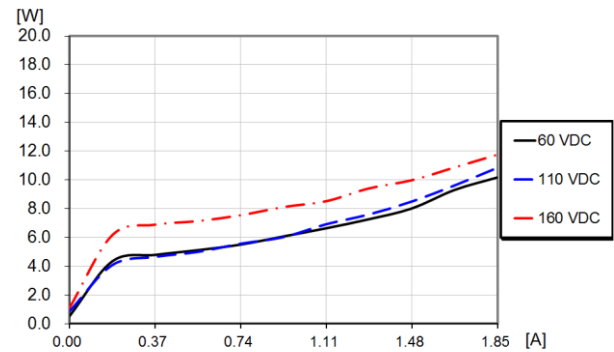


Dissipated power vs. load current and input voltage at +25°C.


Current Limit Characteristics

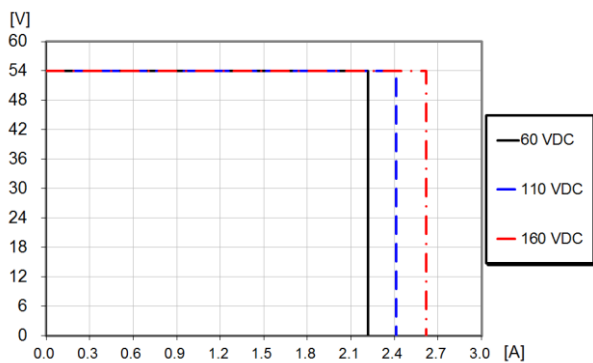Output voltage vs. load current at $I_O > \max I_O$ at +25°C.

Output Current Derating (10mm ¼ brick heat sink)

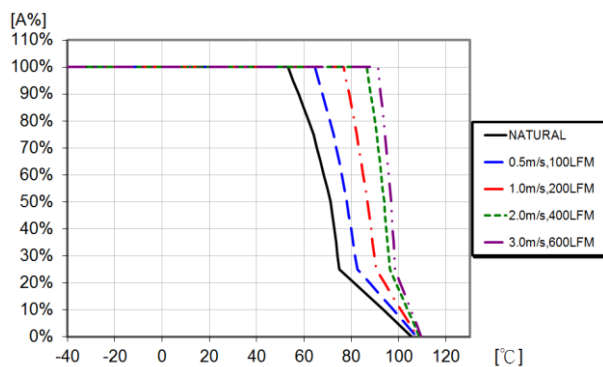Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ¼ brick heat sink)

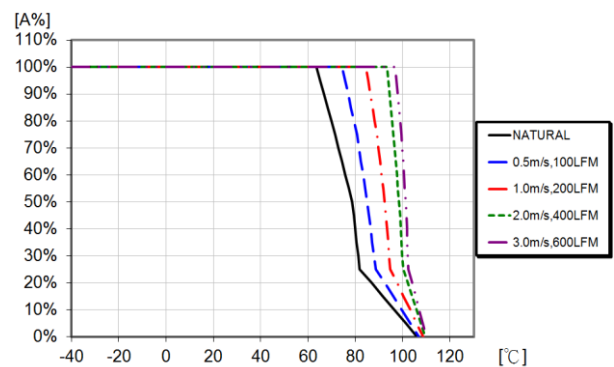Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

54 V, 1.85 A / 100 W

PKM7116HAPI(P)


Start-up

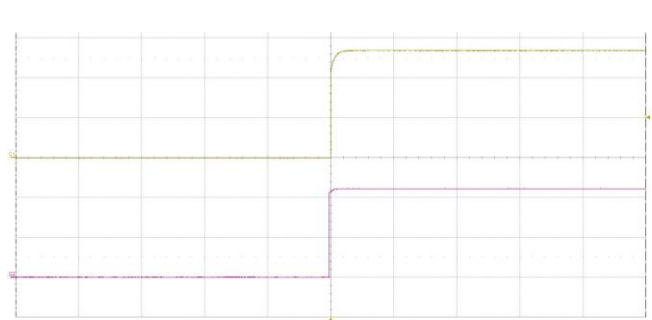

Start-up enabled by connecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 1.85\text{ A}$ resistive load.

Top trace: output voltage (20 V/div.).
Bottom trace: input voltage (50 V/div.).
Time scale: (50 ms/div.).


Shut-down

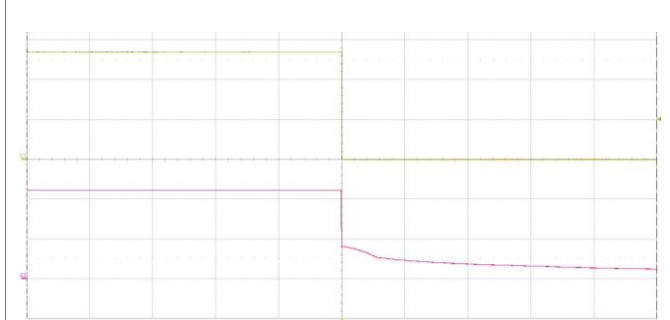

Start-up enabled by connecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 1.85\text{ A}$ resistive load.

Top trace: output voltage (20 V/div.).
Bottom trace: input voltage (50 V/div.).
Time scale: (50 ms/div.).


Output Ripple & Noise

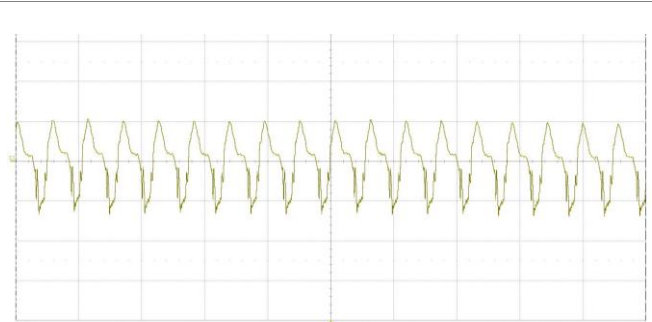

Output voltage ripple at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 1.85\text{ A}$ resistive load.

Trace: output voltage (50 mV/div.).
Time scale: (5 μs /div.).

Output Load Transient Response

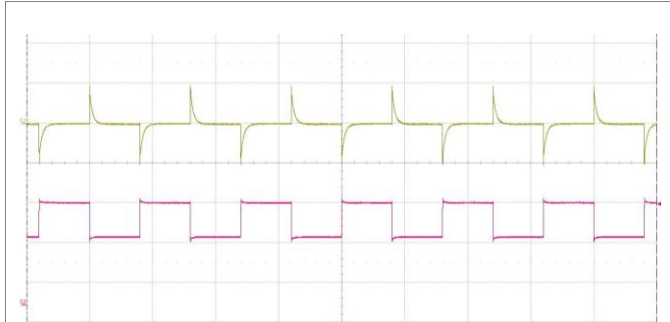

Output voltage response to load current step-change (0.92-1.38-0.92 A) at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$.

Trace: output voltage (200 mV/div.).
Bottom trace: load current (500 mA/div.).
Time scale: (1ms/div.).

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{ADJ_UP}} = \left(\frac{32.667}{\Delta} - 270 \right) \text{ k}\Omega$$

Output Voltage Adjust, Decrease:

$$R_{\text{ADJ_DOWN}} = \left(\frac{40.5244}{\Delta} - 343.191 \right) \text{ k}\Omega$$

Output Voltage=54V

Example:

To trim up the 54V model by 8% to 58.32V the required external resistor is:

$$R_{\text{ADJ_UP}} = \left(\frac{32.667}{0.08} - 270 \right) = 138.34 \text{ k}\Omega$$

Example:

To trim down the 54V model by 7% to 50.22V the required external resistor is:

$$R_{\text{ADJ_DOWN}} = \left(\frac{40.5244}{0.07} - 343.191 \right) = 235.723 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification
12 V, 12.5 A / 150 W

PKM7213API(P)

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = \text{max } I_O$, unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_I	Internal input capacitance			47		μF
P_O	Output power		0		150	W
η	Efficiency	50% of max I_O		86		%
		max I_O		88		
		50% of max I_O , $V_I = 110$ V		86		
		max I_O , $V_I = 110$ V		88		
P_d	Power Dissipation	max I_O		18.5	25	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		5		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	238	280	322	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 12.5$ A	11.856	12	12.144	V
V_O	Output adjust range	See operating information	10.8	12	13.2	V
	Output voltage tolerance band	0-100% of max I_O	11.5		12.5	V
	Idling voltage	$I_O = 0$ A	11.5		12.5	V
	Line regulation	max I_O		10	60	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		20	120	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 377	± 1000	mV
t_{tr}	Load transient recovery time			70	500	μs
t_r	Ramp-up time (from 10–90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.55	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		12.5	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		16.5	20	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.05	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		17	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		15		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

12 V, 12.5 A / 150 W


PKM7213API(P)

Efficiency

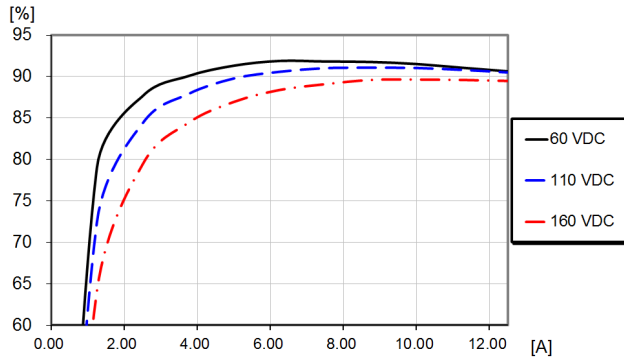


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

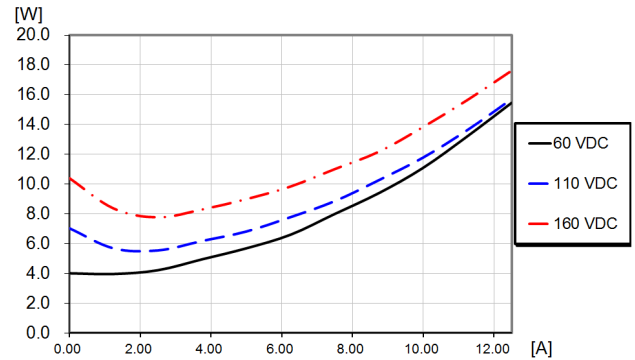


Dissipated power vs. load current and input voltage at +25°C.


Current Limit Characteristics

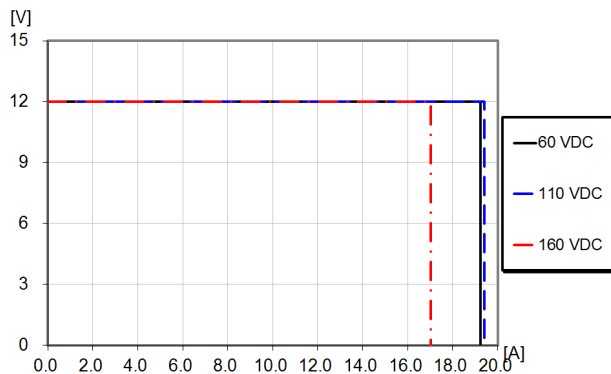Output voltage vs. load current at $I_O > \max I_O$ at +25°C.

Output Current Derating (20mm ¼ brick heat sink)

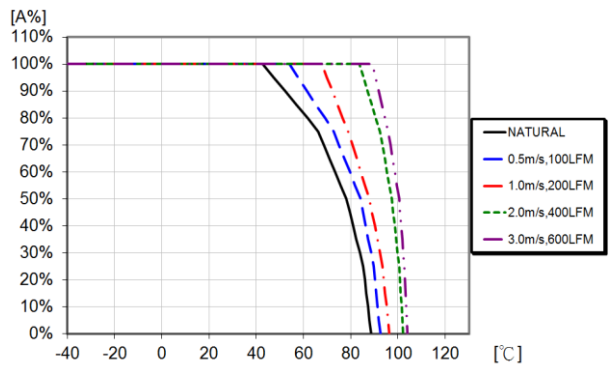Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ½ brick heat sink)

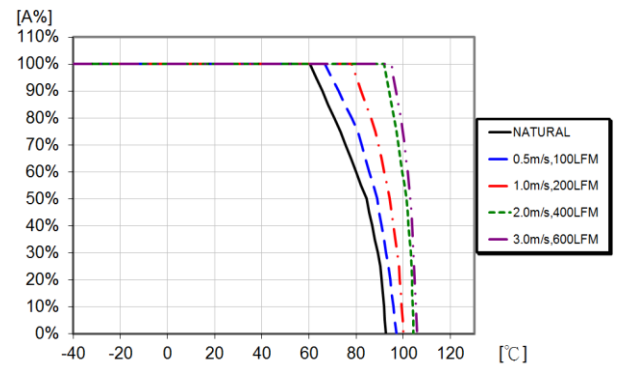Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics


12 V, 12.5 A / 150 W

PKM7213API(P)


Start-up

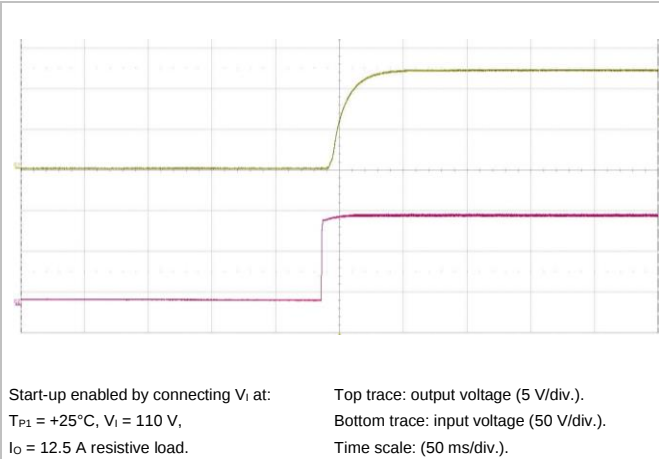


Shut-down

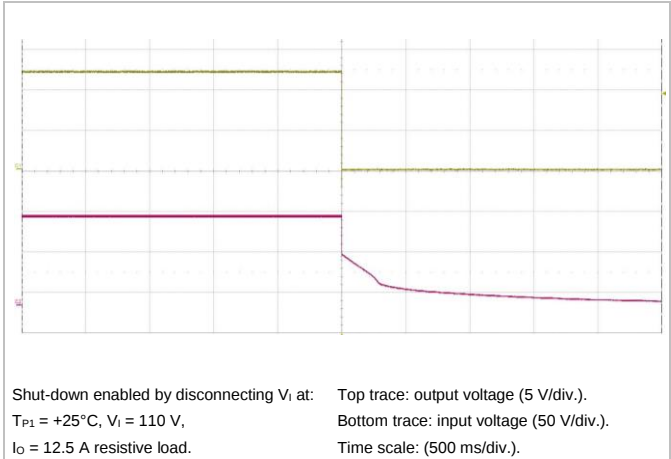

Output Ripple & Noise

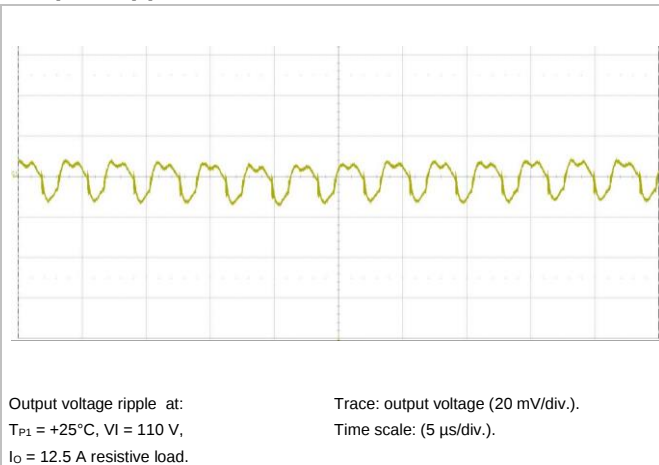

Output Load Transient Response

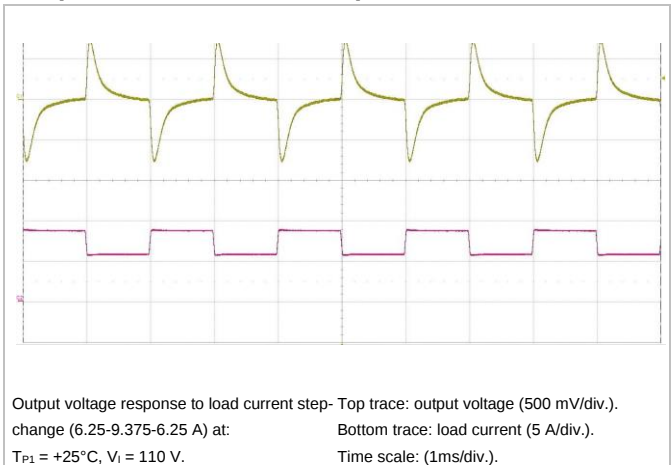

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times V_{o,\text{set}} \times (100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{\text{desired}} - V_{o,\text{set}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage Adjust, Decrease:

$$R_{\text{TRIM_DOWN}} = \left(\frac{5.11}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{o,\text{set}} - V_{\text{desired}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage = 12 V

Example:

To trim up the 12V model by 8% to 12.96V the required external resistor is:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times 12 \times (100 + 8)}{1.225 \times 8} - \frac{511}{8} - 10.22 \right) = 601.68 \text{ k}\Omega$$

$$\Delta\% = \left(\frac{12.96 - 12}{12} \right) \times 100 = 8$$

Example:

To trim down the 12V model by 7% to 11.16V the required external resistor is:

$$R_{\text{TRIM_DOWN}} = \left(\frac{5.11}{7} - 10.22 \right) = 62.78 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
 Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification**PKM7215API(P)****15 V, 10 A / 150 W**
 $T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

 Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = \text{max } I_O$, unless otherwise specified under Conditions.

 Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_I	Internal input capacitance			47		μF
P_O	Output power		0		150	W
η	Efficiency	50% of max I_O		86		%
		max I_O		88		
		50% of max I_O , $V_I = 110$ V		86		
		max I_O , $V_I = 110$ V		88		
P_d	Power Dissipation	max I_O		22	30	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		5		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	238	280	322	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 10$ A	14.82	15	15.18	V
V_O	Output adjust range	See operating information	13.5	15	16.5	V
	Output voltage tolerance band	0-100% of max I_O	14.5		15.5	V
	Idling voltage	$I_O = 0$ A	14.5		15.5	V
	Line regulation	max I_O		15	75	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		25	150	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 400	± 1000	mV
t_{tr}	Load transient recovery time			90	500	μs
t_r	Ramp-up time (from 10-90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.55	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		10	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		15	18	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.05	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		43	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		18		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics


15 V, 10 A / 150 W

PKM7215API(P)


Efficiency

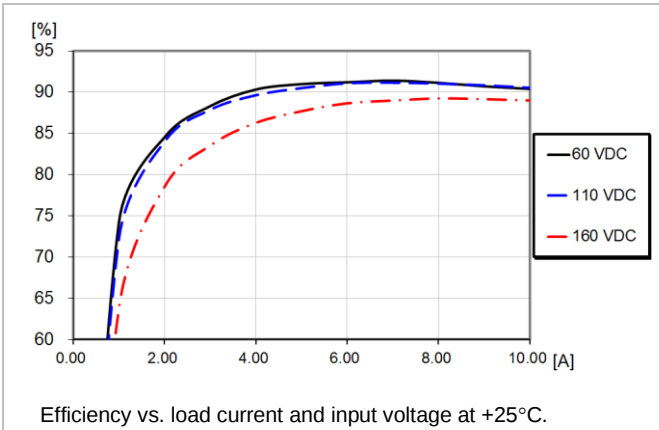


Power Dissipation

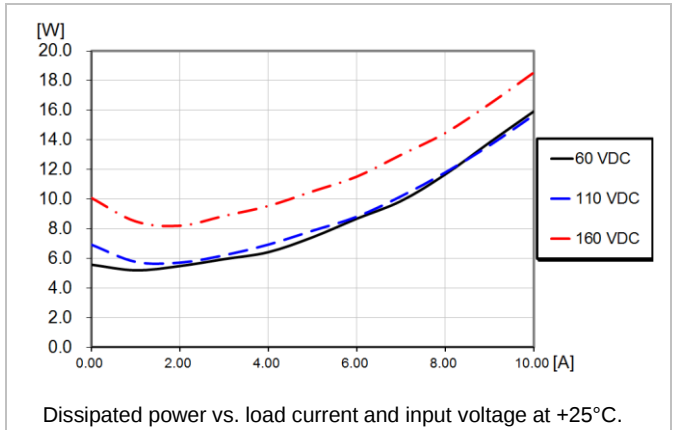


Current Limit Characteristics

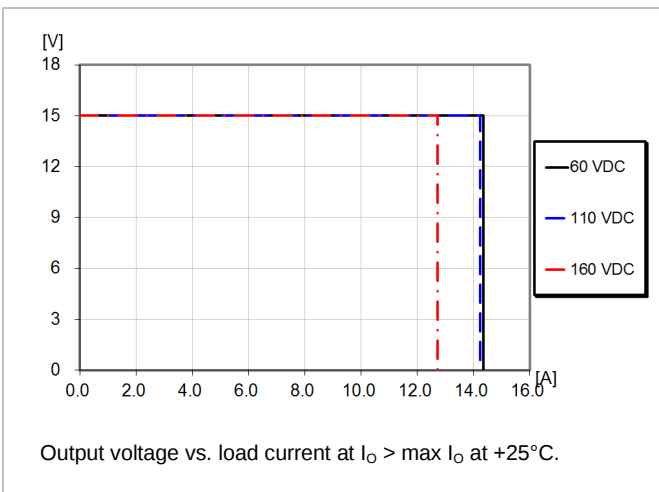

Output Current Derating (20mm ¼ brick heat sink)

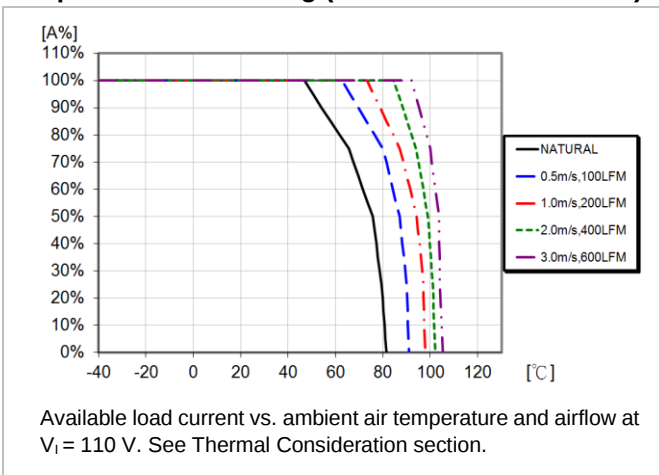

Output Current Derating (20mm ½ brick heat sink)

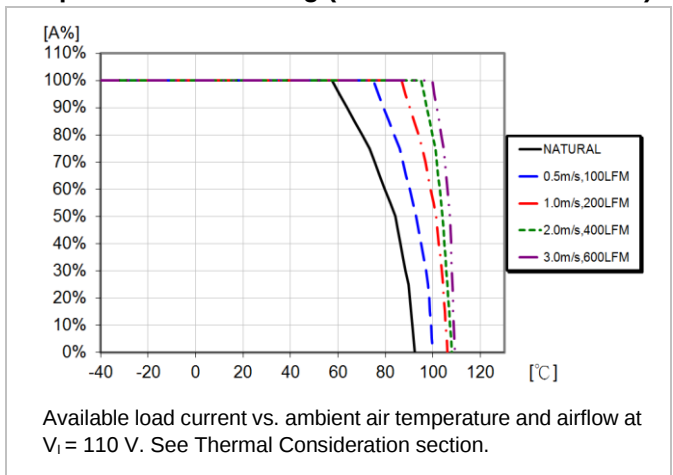

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Typical Characteristics 15 V, 10 A / 150 W

PKM7215API(P)

Start-up




Start-up enabled by connecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 10\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).
Time scale: (100 ms/div.).

Shut-down

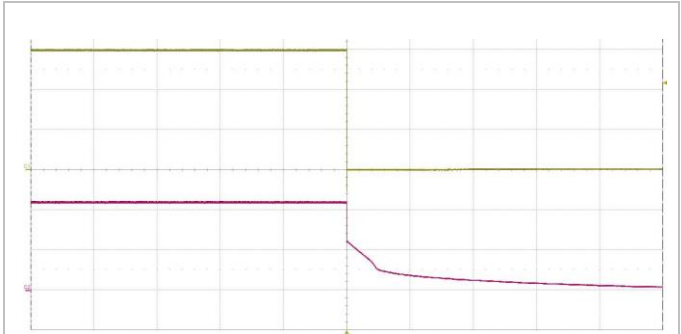


Shut-down enabled by disconnecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 10\text{ A}$ resistive load.

Top trace: output voltage (5 V/div.).

Bottom trace: input voltage (50 V/div.).
Time scale: (500 ms/div.).


Output Ripple & Noise

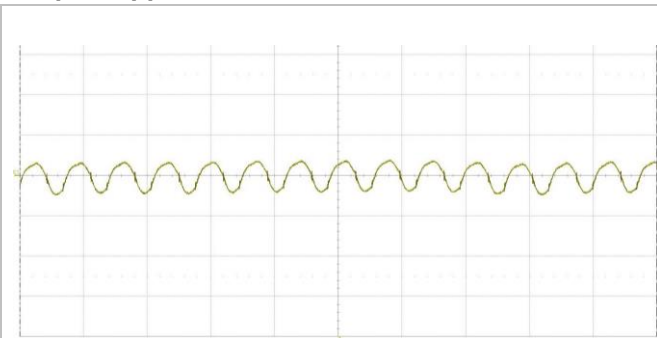

Output voltage ripple at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 10\text{ A}$ resistive load.

Trace: output voltage (50 mV/div.).
Time scale: (5 μs/div.).

Output Load Transient Response

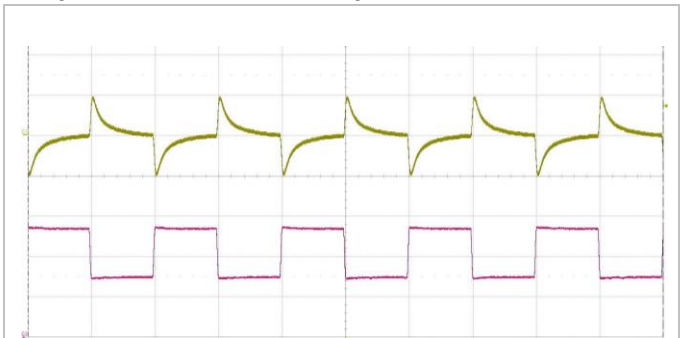

Output voltage response to load current step- Top trace: output voltage (500 mV/div.).
change (5.0-7.5-5.0 A) at: Bottom trace: load current (2 A/div.).
 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$. Time scale: (1ms/div.).

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times V_{o,\text{set}} \times (100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{\text{desired}} - V_{o,\text{set}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage Adjust, Decrease:

$$R_{\text{TRIM_DOWN}} = \left(\frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

$$\Delta\% = \left(\frac{V_{o,\text{set}} - V_{\text{desired}}}{V_{o,\text{set}}} \right) \times 100$$

Output Voltage = 15 V

Example:

To trim up the 15V model by 8% to 16.2V the required external resistor is:

$$R_{\text{TRIM_UP}} = \left(\frac{5.11 \times 15 \times (100 + 8)}{1.225 \times 8} - \frac{511}{8} - 10.22 \right) = 770.62 \text{ k}\Omega$$

$$\Delta\% = \left(\frac{16.2 - 15}{15} \right) \times 100 = 8$$

Example:

To trim down the 15V model by 7% to 13.95V the required external resistor is:

$$R_{\text{TRIM_DOWN}} = \left(\frac{511}{7} - 10.22 \right) = 62.78 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification
24 V, 6.25 A / 150 W

PKM7216ZAPI(P)

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = \text{max } I_O$, unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_I	Internal input capacitance			47		μF
P_O	Output power		0		150	W
η	Efficiency	50% of max I_O		87		%
		max I_O		88		
		50% of max I_O , $V_I = 110$ V		87		
		max I_O , $V_I = 110$ V		88		
P_d	Power Dissipation	max I_O		20	23	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		1.0		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	297.5	350	402.5	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 6.25$ A	23.7	24	24.3	V
V_O	Output adjust range	See operating information	21.6	24	26.4	V
	Output voltage tolerance band	0-100% of max I_O	23.4		24.6	V
	Idling voltage	$I_O = 0$ A	23.4		24.6	V
	Line regulation	max I_O		12	120	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		25	240	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 400	± 1000	mV
t_{tr}	Load transient recovery time			90	500	μs
t_r	Ramp-up time (from 10-90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.55	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		6.25	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		10	12	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.05	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		27	200	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		28		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

24 V, 6.25 A / 150 W


PKM7216ZAPI(P)

Efficiency

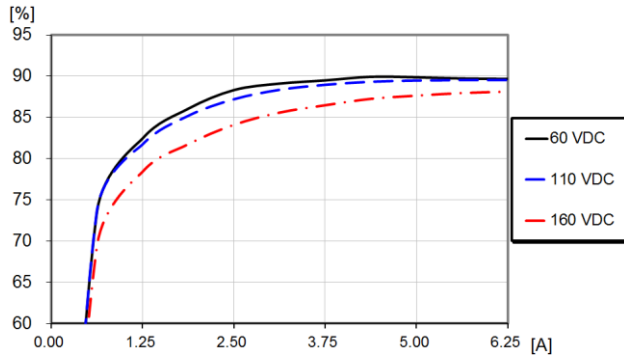


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

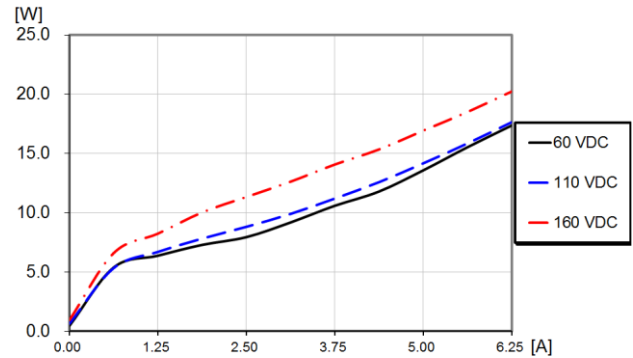


Dissipated power vs. load current and input voltage at +25°C.

Current Limit Characteristics

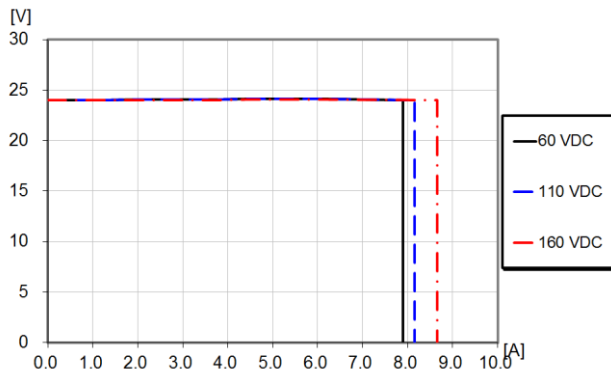


Output voltage vs. load current at $I_o > \max I_o$ at +25°C.

Output Current Derating (20mm ¼ brick heat sink)

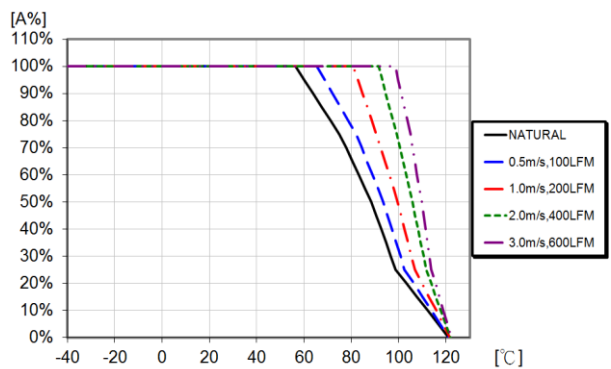

Available load current vs. ambient air temperature and airflow at $V_i = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ½ brick heat sink)

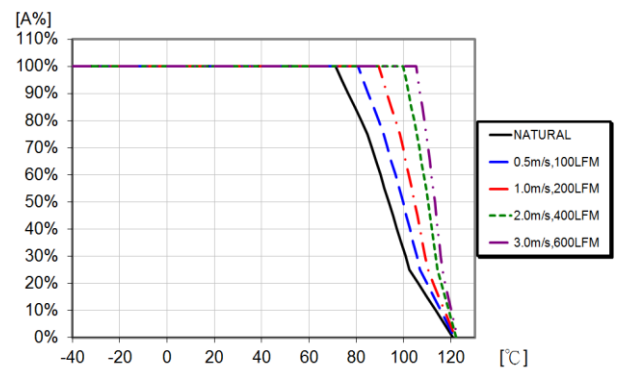

Available load current vs. ambient air temperature and airflow at $V_i = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

24 V, 6.25 A / 150 W

PKM7216ZAPI(P)

Start-up

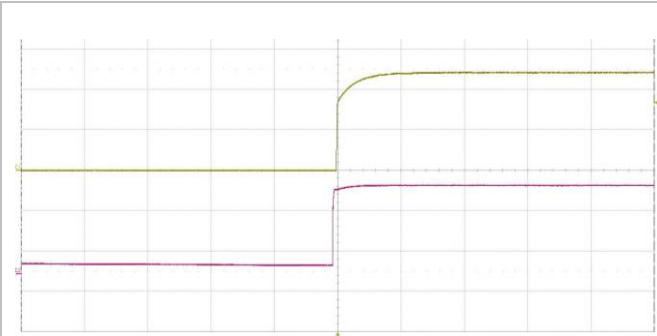
Start-up enabled by connecting V_i at: $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$, $I_o = 6.25\text{ A}$ resistive load.

Top trace: output voltage (10 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (50 ms/div.).

Shut-down

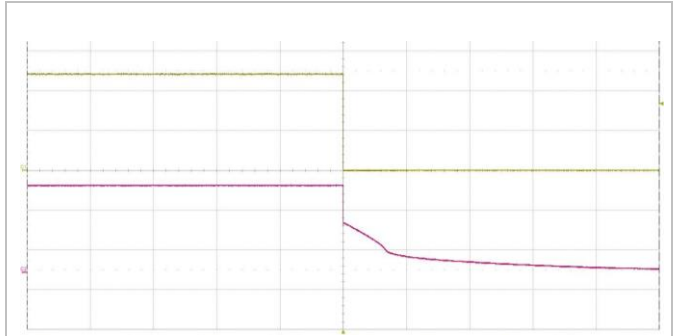
Shut-down enabled by disconnecting V_i at: $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$, $I_o = 6.25\text{ A}$ resistive load.

Top trace: output voltage (10 V/div.).

Bottom trace: input voltage (50 V/div.).

Time scale: (500 ms/div.).

Output Ripple & Noise

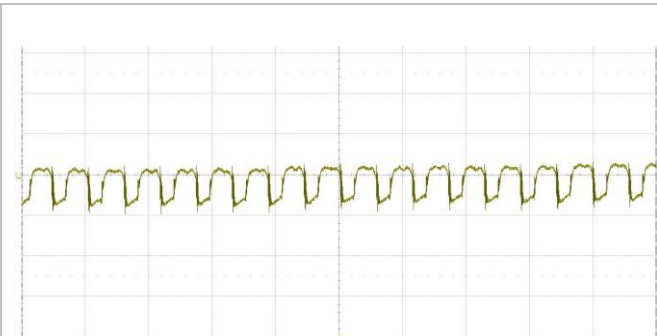


Output voltage ripple at:

 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$, $I_o = 6.25\text{ A}$ resistive load.

Trace: output voltage (20 mV/div.).

Time scale: (5 μs /div.).

Output Load Transient Response

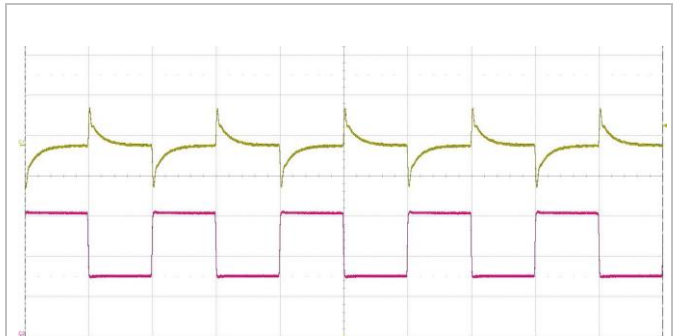

Output voltage response to load current step- Top trace: output voltage (500 mV/div.).

change (3.125-4.68-3.125 A) at:

Bottom trace: load current (1 A/div.).

 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$.

Time scale: (1ms/div.).

Output Voltage Adjust (see operating information)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{ADJ_UP}} = \left(\frac{14.6061}{\Delta} - 120 \right) \text{ k}\Omega$$

Output Voltage Adjust, Decrease:

$$R_{\text{ADJ_DOWN}} = \left(\frac{17.2133}{\Delta} - 151.819 \right) \text{ k}\Omega$$

Output Voltage = 24 V

Example:

To trim up the 24V model by 8% to 25.92V the required external resistor is:

$$R_{\text{ADJ_UP}} = \left(\frac{14.6061}{0.08} - 120 \right) = 62.58 \text{ k}\Omega$$

Example:

To trim down the 24V model by 7% to 22.32V the required external resistor is:

$$R_{\text{ADJ_DOWN}} = \left(\frac{17.2133}{0.07} - 151.819 \right) = 94.08 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification
48 V, 3.12A / 150 W

PKM7216JAPI(P)

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = \text{max } I_O$, unless otherwise specified under Conditions.

Additional $C_{in} = 47 \mu\text{F}$, $C_{out} = 10 \mu\text{F}$ ceramic Cap. + $22 \mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_I	Internal input capacitance			47		μF
P_O	Output power		0		150	W
η	Efficiency	50% of max I_O		87		%
		max I_O		89		
		50% of max I_O , $V_I = 110$ V		87		
		max I_O , $V_I = 110$ V		89		
P_d	Power Dissipation	max I_O		12	16	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		1.0		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	297.5	350	402.5	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 2.08$ A	47.4	48	48.6	V
V_O	Output adjust range	See operating information	43.2	48	52.8	V
	Output voltage tolerance band	0-100% of max I_O	46.8		49.2	V
	Idling voltage	$I_O = 0$ A	46.8		49.2	V
	Line regulation	max I_O		24	240	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		48	480	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 400	± 1000	mV
t_{tr}	Load transient recovery time			90	500	μs
t_r	Ramp-up time (from 10–90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.55	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		3.12	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		4.68	6.24	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.05	0.1	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		500	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		272	300	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		55		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

48 V, 3.12A / 150 W


PKM7216JAPI(P)

Efficiency

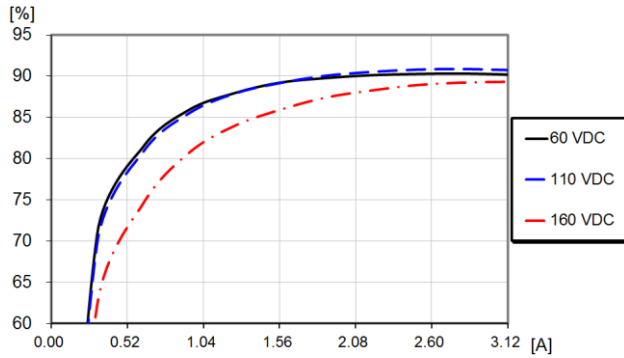


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

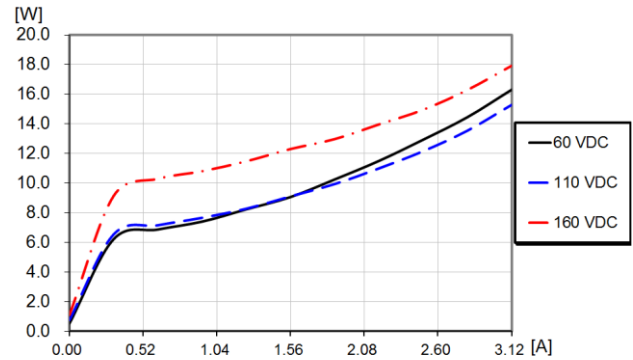


Dissipated power vs. load current and input voltage at +25°C.


Current Limit Characteristics

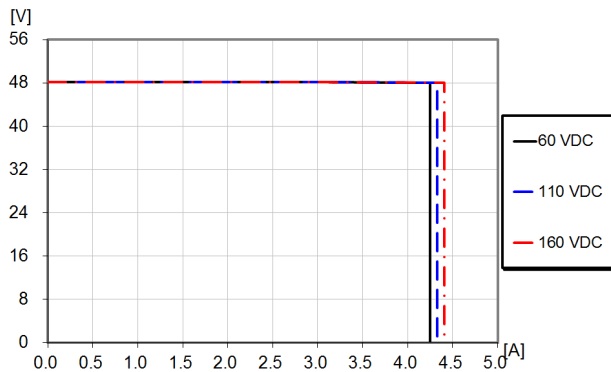Output voltage vs. load current at $I_o > \max I_o$ at +25°C.

Output Current Derating (10mm ¼ brick heat sink)

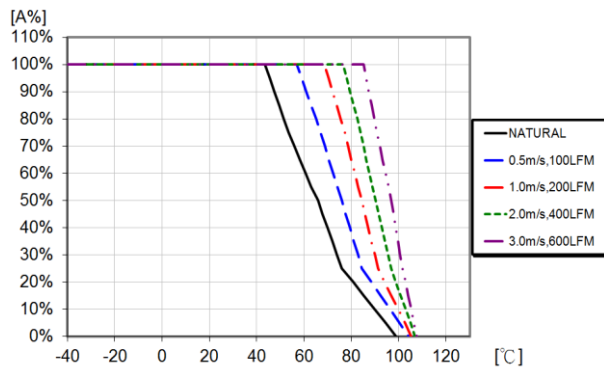Available load current vs. ambient air temperature and airflow at $V_i = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ¼ brick heat sink)

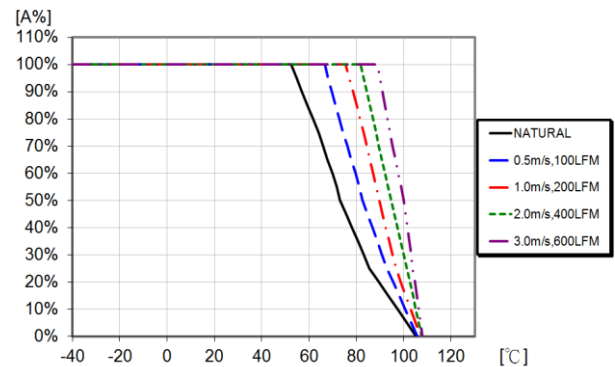Available load current vs. ambient air temperature and airflow at $V_i = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W


28701-BMR711 Rev. M

March 2022

© Flex

Typical Characteristics


48 V, 3.12A / 150 W

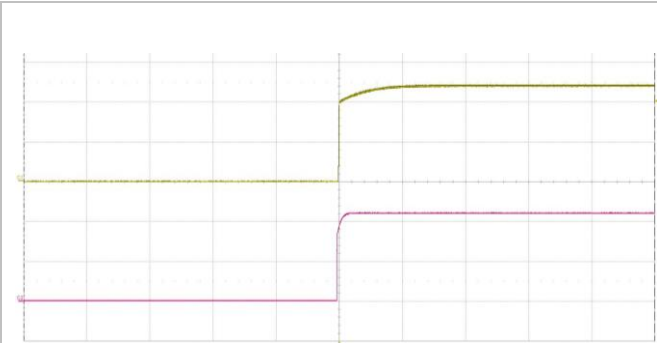PKM7216JAPI(P)**Start-up**Start-up enabled by connecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 3.12\text{ A}$ resistive load.

Top trace: output voltage (20 V/div.).


Bottom trace: input voltage (50 V/div.).
Time scale: (200 ms/div.).

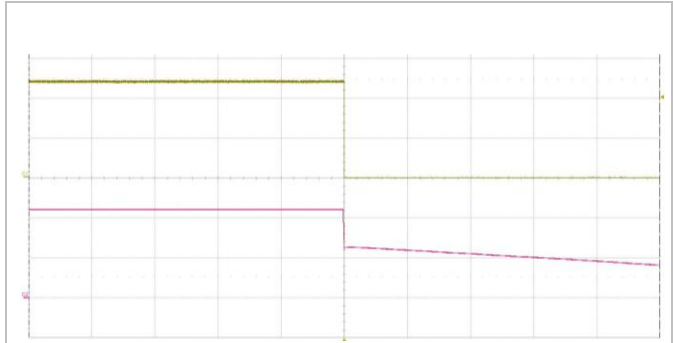Shut-downShut-down enabled by disconnecting V_i at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 3.12\text{ A}$ resistive load.

Top trace: output voltage (20 V/div.).


Bottom trace: input voltage (50 V/div.).
Time scale: (200 ms/div.).

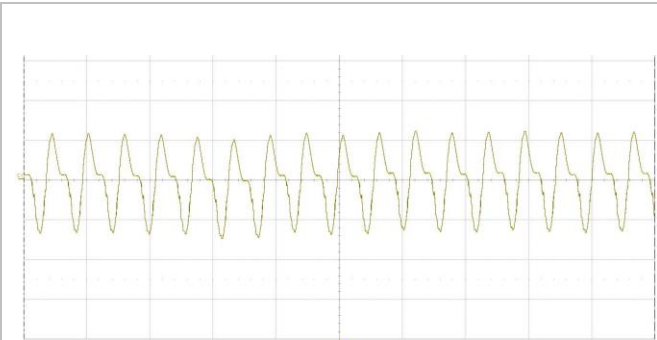Output Ripple & Noise

Output voltage ripple at:

$T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$,
 $I_o = 3.12\text{ A}$ resistive load.

Trace: output voltage (100 mV/div.).

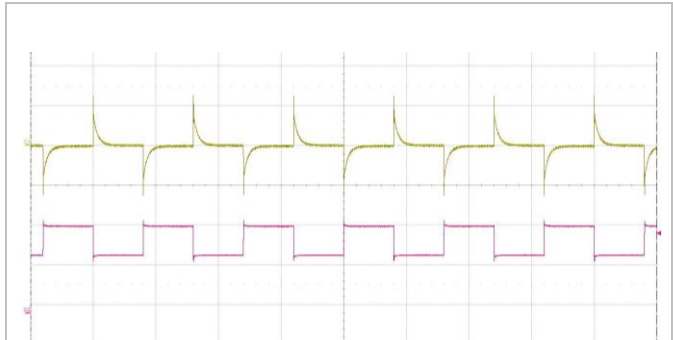Time scale: (5 μs /div.).**Output Load Transient Response**

Output voltage response to load current step- Top trace: output voltage (500 mV/div.).
change (1.56-2.34-1.56 A) at: Bottom trace: load current (1 A/div.).

 $T_{P1} = +25^\circ\text{C}$, $V_i = 110\text{ V}$.

Time scale: (10 ms/div.).

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{ADJ_UP}} = \left(\frac{29.2214}{\Delta} - 240 \right) \text{ k}\Omega$$

Output Voltage Adjust, Decrease:

$$R_{\text{ADJ_DOWN}} = \left(\frac{34.4607}{\Delta} - 303.682 \right) \text{ k}\Omega$$

Output Voltage = 48 V

Example:

To trim up the 48V model by 8% to 51.84V the required external resistor is:

$$R_{\text{ADJ_UP}} = \left(\frac{29.2214}{0.08} - 240 \right) = 125.27 \text{ k}\Omega$$

Example:

To trim down the 48V model by 7% to 44.64V the required external resistor is:

$$R_{\text{ADJ_DOWN}} = \left(\frac{34.4607}{0.07} - 303.682 \right) = 188.61 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Electrical Specification
54 V, 2.78 A / 150 W

PKM7216HAPI(P)

$T_{P1} = -40$ to 105°C , $V_I = 60$ to 160 V, {sense pins connected to output pins} unless otherwise specified under Conditions.

Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, max I_O , unless otherwise specified under Conditions.

Additional $C_{in} = 47\text{ }\mu\text{F}$, $C_{out} = 10\text{ }\mu\text{F}$ ceramic Cap. + $22\text{ }\mu\text{F}$ E-Cap. See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		60		160	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	53	55	57	V
V_{lon}	Turn-on input voltage	Increasing input voltage	56	58	60	V
C_i	Internal input capacitance			47		μF
P_O	Output power		0		150	W
η	Efficiency	50% of max I_O , $V_I = 110$ V		89		%
		max I_O , $V_I = 110$ V		90		
P_d	Power Dissipation	max I_O		10	18	W
P_{li}	Input idling power	$I_O = 0$ A, $V_I = 110$ V		1.0		W
P_{RC}	Input standby power	$V_I = 110$ V (turned off with RC)		0.7		W
f_s	Switching frequency	0-100 % of max I_O	297.5	350	402.5	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, $I_O = 2.78$ A	53.352	54	54.648	V
V_O	Output adjust range	See operating information	48.6	54	59.4	V
	Output voltage tolerance band	0-100% of max I_O	52.38		55.62	V
	Idling voltage	$I_O = 0$ A	52.38		55.62	V
	Line regulation	max I_O		150	270	mV
	Load regulation	$V_I = 110$ V, 25-100% of max I_O		300	540	mV
V_{tr}	Load transient voltage deviation	$V_I = 110$ V, Load step 50-75-50% of max I_O , $di/dt = 100\text{mA}/\mu\text{s}$		± 800	± 1000	mV
t_{tr}	Load transient recovery time			50	500	μs
t_r	Ramp-up time (from 10–90% of V_{Oi})	100% of max I_O			15	ms
t_s	Start-up time (from V_I connection to 90% of V_{Oi})				60	ms
t_{RC}	RC start-up time (from V_{RC} connection to 90% of V_{Oi})	max I_O		1.5	10	ms
RC	Sink current	See operating information	10			mA
	Trigger level	Decreasing / Increasing RC-voltage		0.8/2.5		V
I_O	Output current		0		2.78	A
I_{lim}	Current limit threshold	$V_I = 110$ V, $T_{P1} < \text{max } T_{P1}$		3.8	5.56	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 1		0.1	0.2	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, V_{Oi}		100	200	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 110$ V, 0-100% of max I_O		62		V

Note 1: hiccup mode

Note 2: Test condition: Electronic Capacitor and full load

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics

54 V, 2.78 A / 150 W


PKM7216HAPI(P)

Efficiency

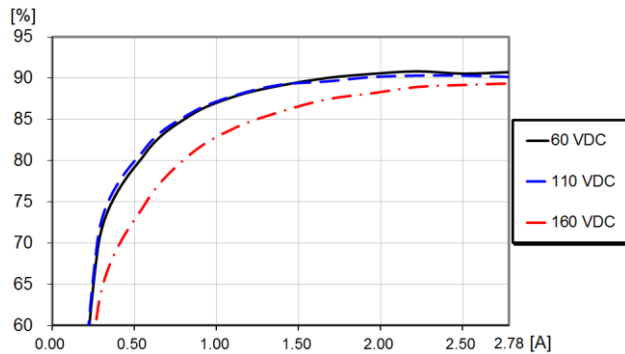


Efficiency vs. load current and input voltage at +25°C.

Power Dissipation

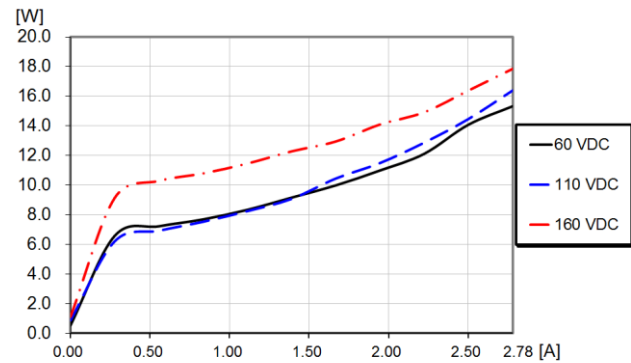


Dissipated power vs. load current and input voltage at +25°C.

Current Limit Characteristics

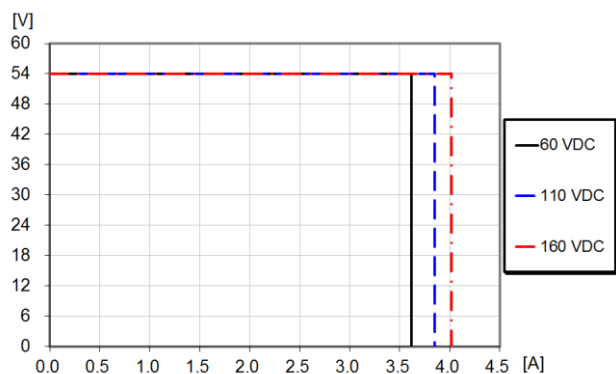


Output voltage vs. load current at $I_O > \max I_O$ at +25°C.

Output Current Derating (20mm ¼ brick heat sink)

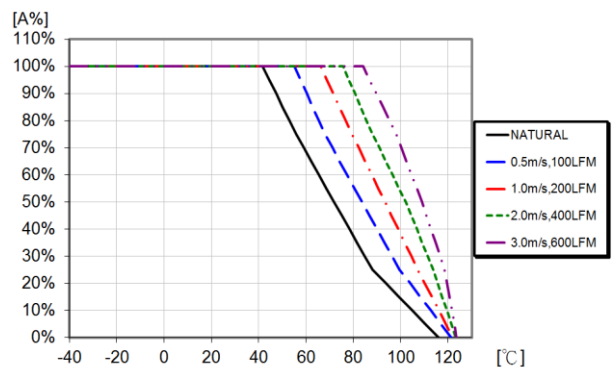

Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Output Current Derating (20mm ½ brick heat sink)

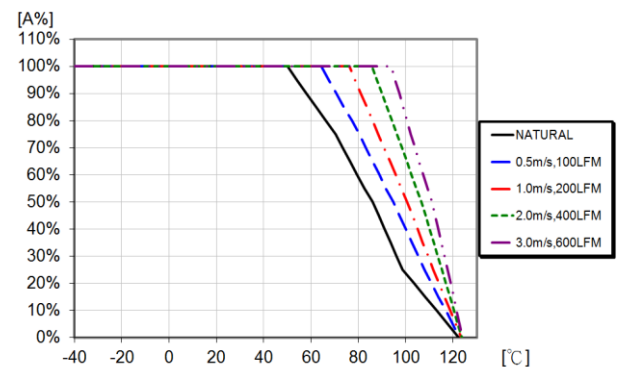

Available load current vs. ambient air temperature and airflow at $V_I = 110$ V. See Thermal Consideration section.

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Typical Characteristics


54 V, 2.78 A / 150 W

PKM7216HAPI(P)


Start-up

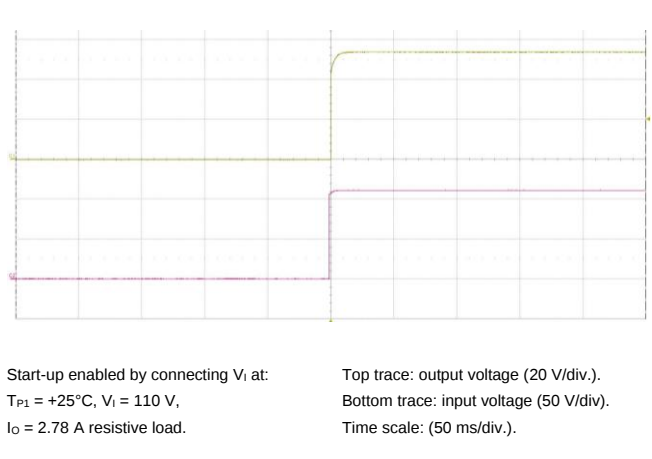


Shut-down

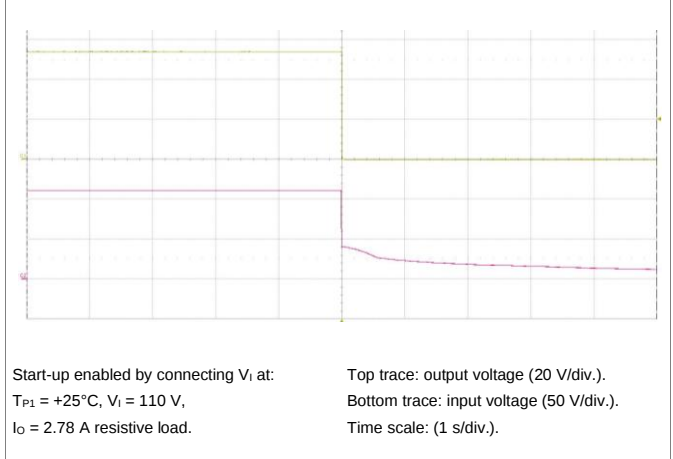

Output Ripple & Noise

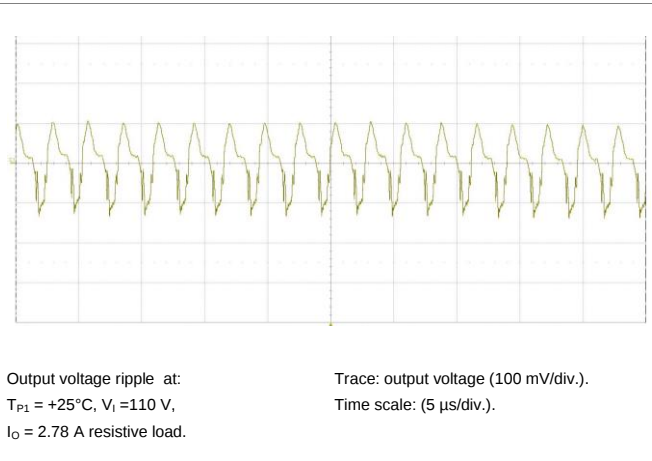

Output Load Transient Response

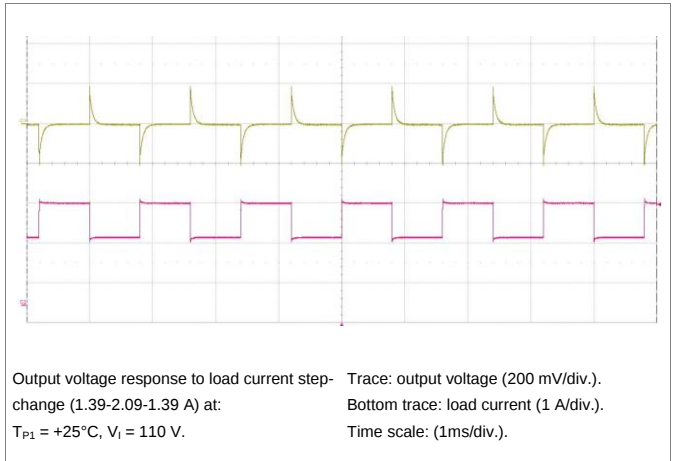

Output Voltage Adjust (TRIM UP/TRIM DOWN)

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust, Increase:

$$R_{\text{ADJ_UP}} = \left(\frac{32.667}{\Delta} - 270 \right) \text{ k}\Omega$$

Output Voltage Adjust, Decrease:

$$R_{\text{ADJ_DOWN}} = \left(\frac{40.5244}{\Delta} - 343.191 \right) \text{ k}\Omega$$

Output Voltage = 54 V

Example:

To trim up the 54V model by 8% to 58.32V the required external resistor is:

$$R_{\text{ADJ_UP}} = \left(\frac{32.667}{0.08} - 270 \right) = 138.34 \text{ k}\Omega$$

Example:

To trim down the 54V model by 7% to 50.22V the required external resistor is:

$$R_{\text{ADJ_DOWN}} = \left(\frac{40.5244}{0.07} - 343.191 \right) = 235.723 \text{ k}\Omega$$

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M


March 2022

© Flex

EMC Specification

Conducted EMI measured according to EN55032, CISPR 32 and FCC part 15J (see test set-up). See Design Note 009 for further information. The fundamental switching frequency is 350 kHz for PKM 7116ZA (100W/24V) at $V_i = 110$ V and max I_o .


Conducted EMI Input terminal value (typ)

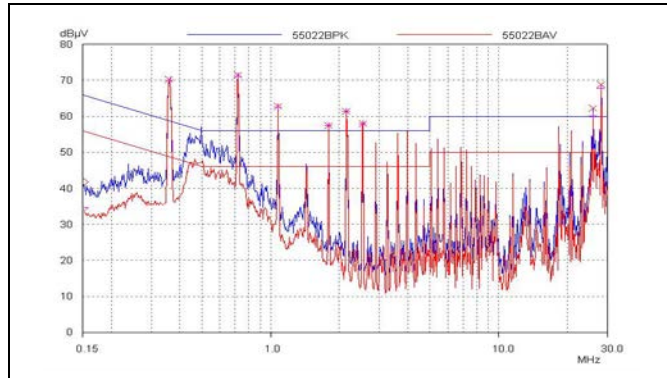

EMI without filter


Optional external filter for class B

Suggested external input filter in order to meet class B in EN 55032, CISPR 32 and FCC part 15J.

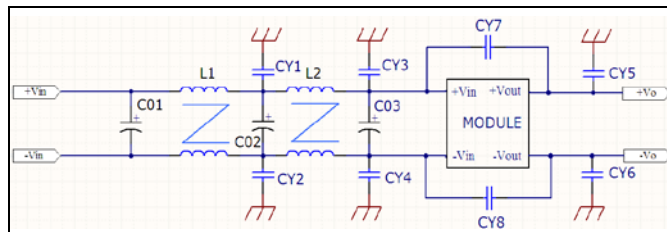


Filter components:

C01=150μF, C02,C03=22μF(EE-CAP)
CY1,CY2,CY3,CY4=3.3nF, CY5,CY6=2.2nF(Y-CAP)
L1 = 1.6mH L2 = 6.0mH(CM CHOKE)
NC: CY7,CY8, reserved for adjusting to better EMI performance for different applications

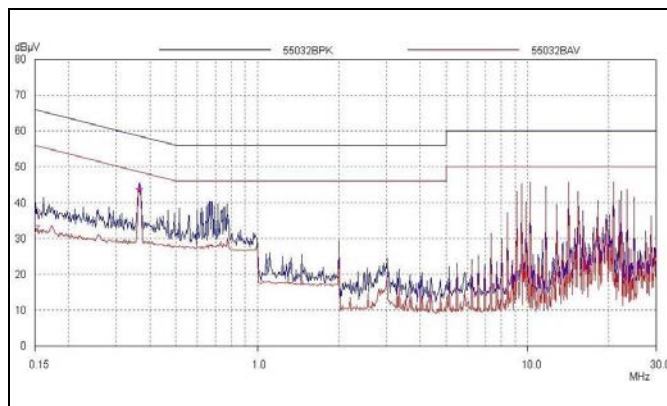

EMI with filter

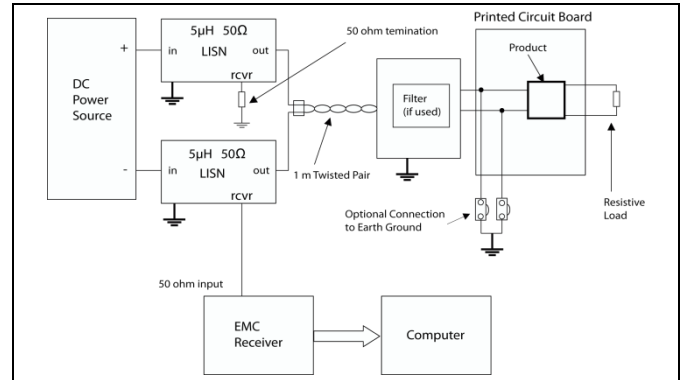

Test set-up


Layout recommendations

The radiated EMI performance of the product will depend on the PWB layout and ground layer design. It is also important to consider the stand-off of the product. If a ground layer is used, it should be connected to the output of the product and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PWB and improve the high frequency EMC performance.

Output ripple and noise

Output ripple and noise measured according to figure below. See Design Note 022 for detailed information.

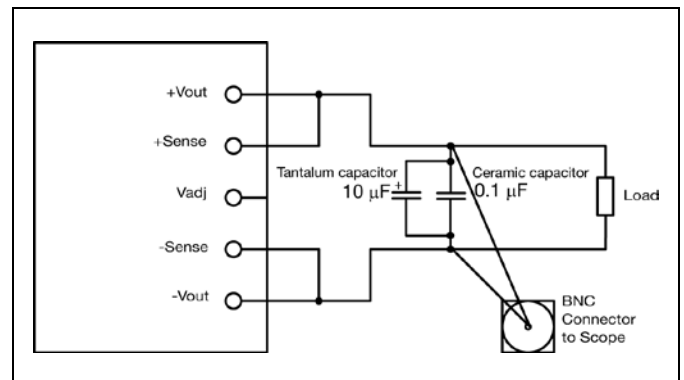

Output ripple and noise test setup

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Operating Information

Input Voltage

The input voltage range 66 to 160 Vdc meets the railway systems. At input voltages exceeding 160 V, the power loss will be higher than at normal input voltage and T_{P1} must be limited to absolute max $+115^{\circ}\text{C}$. The absolute maximum continuous input voltage is 200 Vdc.


Short duration transient disturbances can occur on the DC distribution and input of the product when a short circuit fault occurs on the equipment side of a protective device (fuse or circuit breaker). The voltage level, duration and energy of the disturbance are dependant on the particular DC distribution network characteristics and can be sufficient to damage the product unless measures are taken to suppress or absorb this energy. The transient voltage can be limited by capacitors and other energy absorbing devices like zener diodes connected across the positive and negative input conductors at a number of strategic points in the distribution network. The end-user must secure that the transient voltage will not exceed the value stated in the Absolute maximum ratings. ETSI TR 100 283 examines the parameters of DC distribution networks and provides guidelines for controlling the transient and reduce its harmful effect.

Turn-off Input Voltage

The products monitor the input voltage and will turn on and turn off at predetermined levels.

The minimum hysteresis between turn on and turn off input voltage is 1.7 V.

Remote Control (RC)



The products are fitted with a remote control function referenced to the primary negative input connection (-In), with negative and positive logic options available. The RC function allows the product to be turned on/off by an external device like a semiconductor or mechanical switch. The RC pin has an internal pull up resistor to +In.

The external device must provide a minimum required sink current to guarantee a voltage not higher than maximum voltage on the RC pin (see Electrical characteristics table). When the RC pin is left open, the voltage generated on the RC pin is 3 - 5 V.

The standard product is provided with "negative logic" RC and will be on until the RC pin is connected to the -In. To turn off the product the RC pin should be left open, or connected to a voltage higher than 2 V referenced to -In. In situations where it is desired to have the product to power up automatically without the need for control signals or a switch, the RC pin can be wired directly to -In.

The second option is "positive logic" remote control, which can be ordered by adding the suffix "P" to the end of the part number. When the RC pin is left open, the product starts up automatically when the input voltage is applied. Turn off is achieved by connecting the RC pin to the -In. The product will restart automatically when this connection is opened.

See Design Note 021 for detailed information.

Input and Output Impedance

The impedance of both the input source and the load will interact with the impedance of the product. It is important that the input source has low characteristic impedance. The products are designed for stable operation without external capacitors connected to the input or output. The performance in some applications can be enhanced by addition of external capacitance as described under External Decoupling Capacitors.

If the input voltage source contains significant inductance, the addition of a 22 - 100 μF capacitor across the input of the product will ensure stable operation. The capacitor is not required when powering the product from an input source with an inductance below 10 μH . The minimum required capacitance value depends on the output power and the input voltage. The higher output power the higher input capacitance is needed. Approximately doubled capacitance value is required for a 110 V input voltage source compared to a 110 V input voltage source.

External Decoupling Capacitors

When powering loads with significant dynamic current requirements, the voltage regulation at the point of load can be improved by addition of decoupling capacitors at the load. The most effective technique is to locate low ESR ceramic and electrolytic capacitors as close to the load as possible, using several parallel capacitors to lower the effective ESR. The ceramic capacitors will handle high-frequency dynamic load changes while the electrolytic capacitors are used to handle low frequency dynamic load changes. It is equally important to use low resistance and low inductance PWB layouts and cabling.

External decoupling capacitors will become part of the product's control loop. The control loop is optimized for a wide range of external capacitance and the maximum recommended value that could be used without any additional analysis is found in the Electrical specification.

The ESR of the capacitors is a very important parameter. Stable operation is guaranteed with a verified ESR value of $>5\text{ m}\Omega$ across the output connections.

For further information please contact your local Flex representative.

Technical Specification

PKM7000A series DC-DC Converters
 Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022


© Flex

Output Voltage Adjust (V_{adj})

The products have an Output Voltage Adjust pin (V_{adj}). This pin can be used to adjust the output voltage above or below Output voltage initial setting.

When increasing the output voltage, the voltage at the output pins (including any remote sense compensation) must be kept below the threshold of the over voltage protection, (OVP) to prevent the product from shutting down. At increased output voltages the maximum power rating of the product remains the same, and the max output current must be decreased correspondingly.

To increase the voltage the resistor should be connected between the V_{adj} pin and +Sense pin. The resistor value of the Output voltage adjust function is according to information given under the Output section for the respective product. To decrease the output voltage, the resistor should be connected between the V_{adj} pin and -Sense pin.

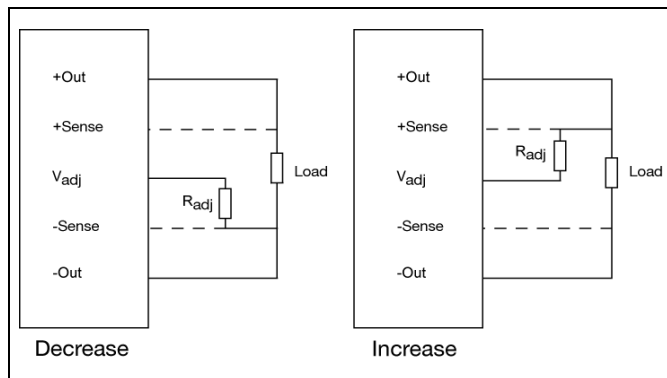

resume normal operation automatically when the temperature has dropped $>10^{\circ}\text{C}$ below the temperature threshold.

Over Voltage Protection (OVP)

The products have output over voltage protection that will shut down the product in over voltage conditions. The product will make continuous attempts to start up (non-latching mode) and resume normal operation automatically after removal of the over voltage condition.

Over Current Protection (OCP)

The products include current limiting circuitry for protection at continuous overload. The output voltage will decrease towards zero for output currents in excess of max output current (max I_o). The product will resume normal operation after removal of the overload. The load distribution should be designed for the maximum output short circuit current specified.

Parallel Operation

Two products may be paralleled for redundancy if the total power is equal or less than $P_o \text{ max}$. It is not recommended to parallel the products without using external current sharing circuits.

See Design Note 006 for detailed information.

Remote Sense

The products have remote sense that can be used to compensate for voltage drops between the output and the point of load. The sense traces should be located close to the PWB ground layer to reduce noise susceptibility. The remote sense circuitry will compensate for up to 10% voltage drop between output pins and the point of load.

If the remote sense is not needed +Sense should be connected to +Out and -Sense should be connected to -Out.

Over Temperature Protection (OTP)

The products are protected from thermal overload by an internal over temperature shutdown circuit.

When T_{P1} as defined in thermal consideration section exceeds 115°C the product will shut down. The product will make continuous attempts to start up (non-latching mode) and

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex


Thermal Consideration

General


The products are designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation.

For products mounted on a PWB without a heat sink attached, cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependant on the airflow across the product. Increased airflow enhances the cooling of the product. The Output Current Derating graph found in the Output section for each model provides the available output current vs. ambient air temperature and air velocity at $V_I = 110V$.

The product is tested on a 254 x 254 mm, 35 μm (1 oz), 8-layer test board mounted vertically in a wind tunnel with a cross-section of 608 x 203 mm.

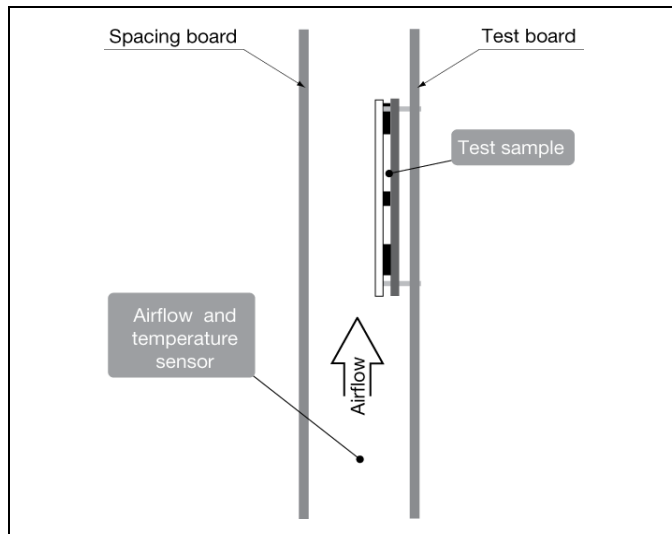


For products with base plate used in a sealed box/cold wall application, cooling is achieved mainly by conduction through the cold wall. The Output Current Derating graphs are found in the Output section for each model. The product is tested in a sealed box test set up with ambient temperatures 85, 55 and 25°C. See Design Note 028 for further details.

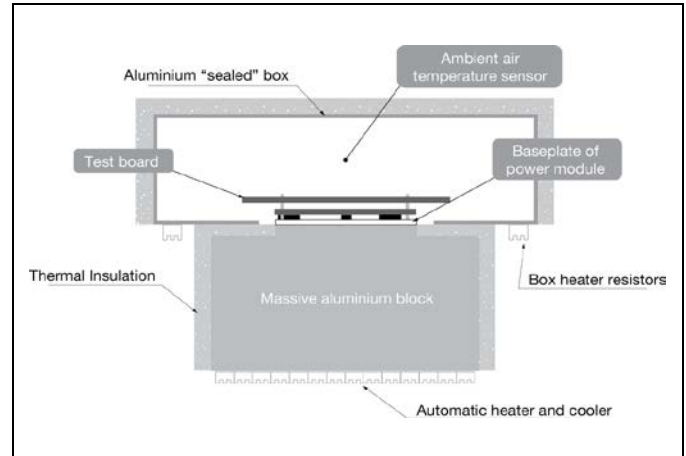

Definition of product operating temperature

The product operating temperatures is used to monitor the temperature of the product, and proper thermal conditions can be verified by measuring the temperature at positions P1. The temperature at the positions (T_{P1}) should not exceed the maximum temperatures in the table below. The number of measurement points may vary with different thermal design and topology. The temperature above maximum measured at the reference point P1 is not allowed and may cause permanent damage.

Position	Description	Max Temp.
P1	Reference point	$T_{P1} = 115^\circ C$

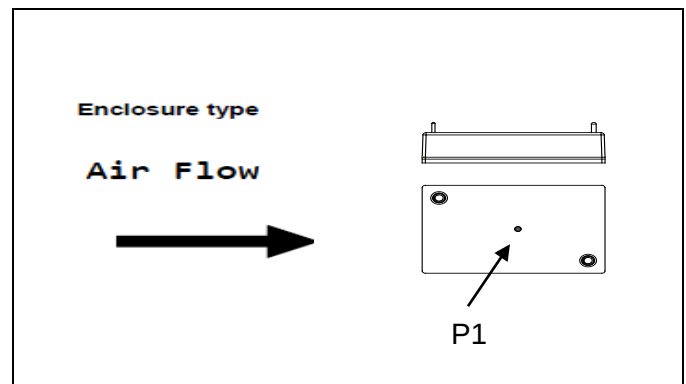

Base plate

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Ambient Temperature Calculation

For products with base plate the maximum allowed ambient temperature can be calculated by using the thermal resistance.

1. The power loss is calculated by using the formula
 $((1/\eta) - 1) \times \text{output power} = \text{power losses (Pd)}$.
 η = efficiency of product. E.g. 90% = 0.9

2. Find the thermal resistance (Rth) in the Thermal Resistance graph found in the Output section for each model. **Note that the thermal resistance can be significantly reduced if a heat sink is mounted on the top of the base plate.**

Calculate the temperature increase (ΔT).

$$\Delta T = R_{th} \times P_d$$

3. Max allowed ambient temperature is:

$$\text{Max } T_{P1} - \Delta T.$$

E.g. PKM7115APIP at 1m/s:

a. $((\frac{1}{0.9}) - 1) \times 100 \text{ W} = 11 \text{ W}$

b. $11 \text{ W} \times 3.3^\circ\text{C/W} = 36^\circ\text{C}$


c. $115^\circ\text{C} - 36^\circ\text{C} = \text{max allowed ambient temperature is } 79^\circ\text{C}$

4. The thermal performance can be significantly improved by mounting a heat sink on top of the base plate.

The thermal resistance between base plate and heat sink, Rth, b-h is calculated as:

$$R_{th, b-h} = \frac{T_{\text{base plate}} - T_{\text{heat sink}}}{R_{th}}$$

The actual temperature will be dependent on several factors such as the PWB size, number of layers and direction of airflow.

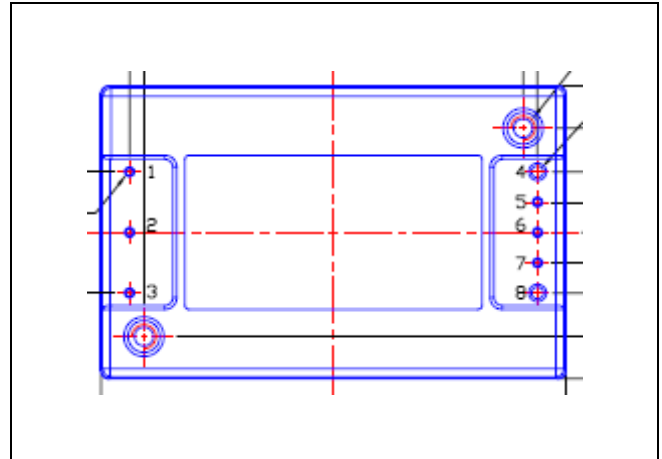Connections

Pin Connections	
Pin	Function
1	-Vin
2	Remote On/Off Control
3	+Vin
4	-Vout
5	-Vsense
6	Trim
7	+Vsense
8	+Vout

Technical Specification


PKM7000A series DC-DC Converters
 Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Mechanical Information - Enclosure Type

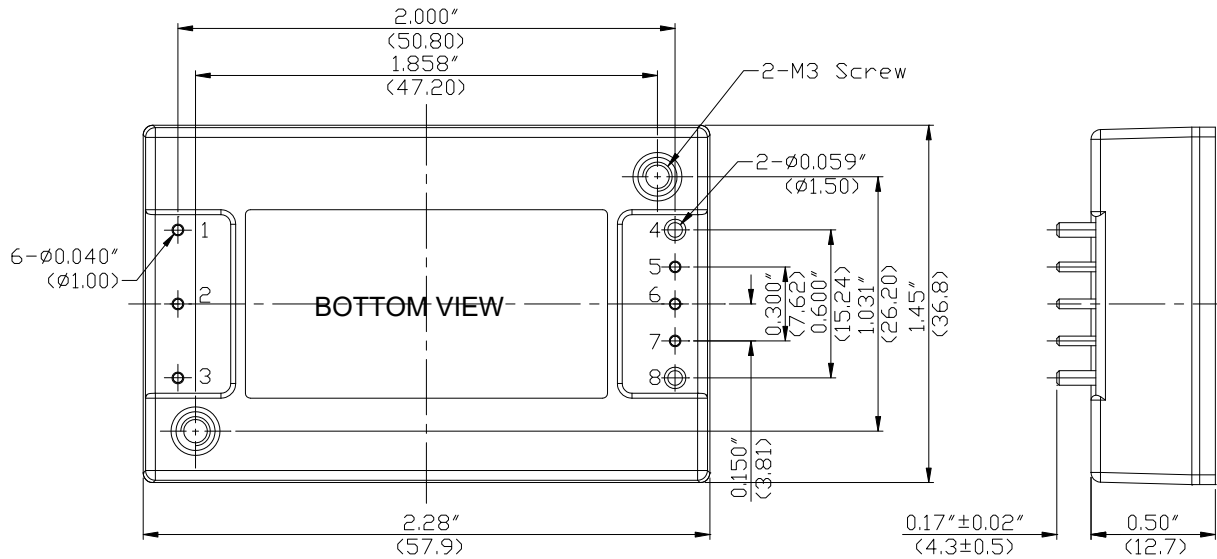

Pin Connections	
Pin	Function
1	-Vin
2	Remote On/Off Control
3	+Vin
4	-Vout
5	-Vsense
6	Trim
7	+Vsense
8	+Vout

Notes:

1. Pins:

Material: Brass

Plating: Nickel

2. Weight: typical 70g

All dimensions in inches (mm).

Tolerance .xx= ±0.02"

.xxx=±0.010"

3. The screw locked torque: MAX

4.0kgf-cm/0.39N-m


Technical Specification

PKM7000A series DC-DC Converters
 Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

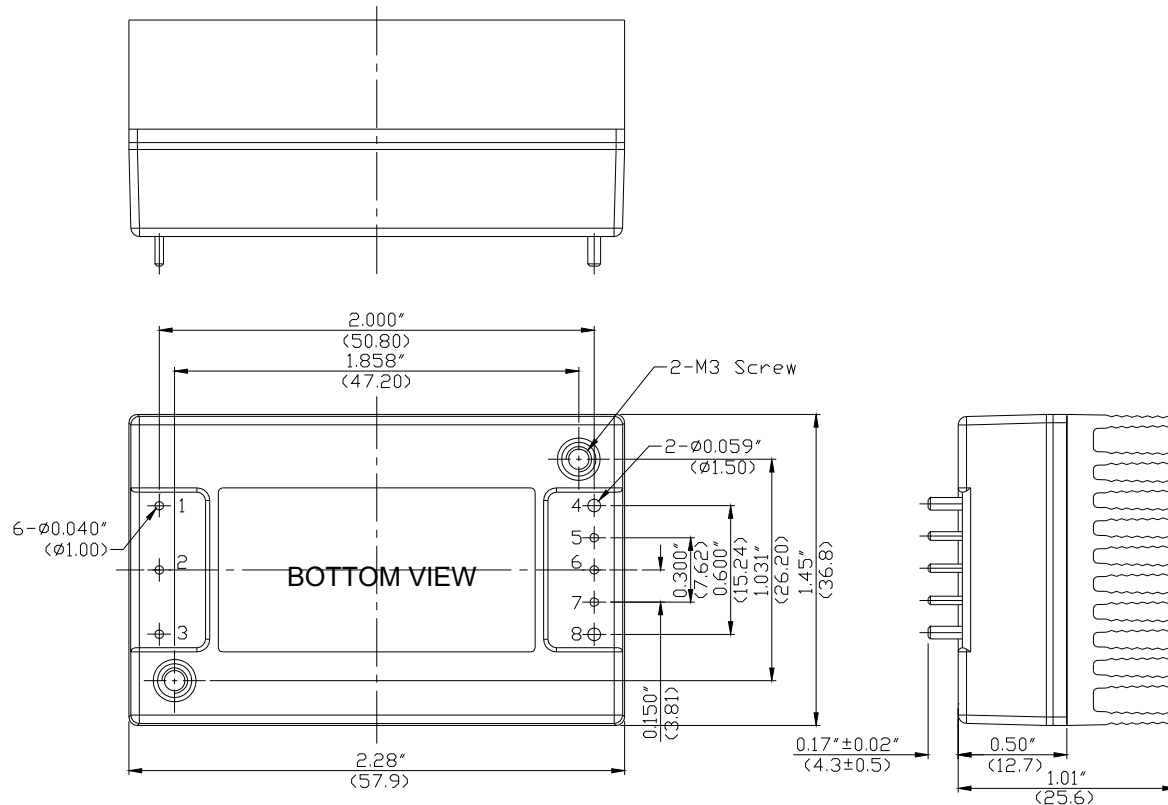Mechanical Information – 10mm ¼ brick heat sink**Notes:****1. Pins:**

Material: Brass

Plating: Nickel

2. Heatsink:

Material: aluminum

Plating: Anodized

3. Weight: typical 110g

All dimensions in inches (mm).

Tolerance .xx= $\pm 0.02"$.xxx= $\pm 0.010"$ **3. The screw locked torque: MAX**

4.0kgf-cm/0.39N-m


Technical Specification

PKM7000A series DC-DC Converters
 Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

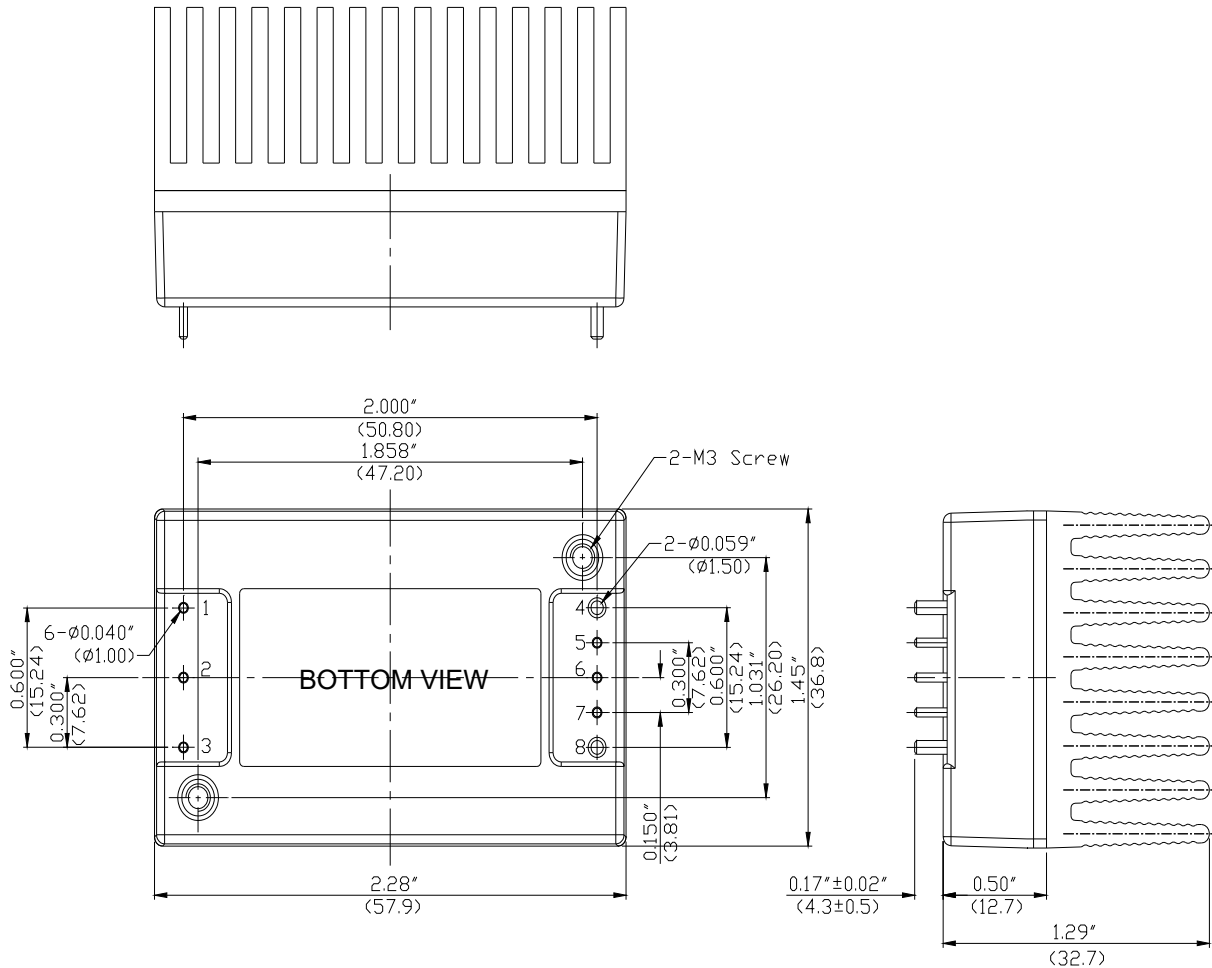Mechanical Information - 20mm ¼ brick heat sink


Technical Specification

PKM7000A series DC-DC Converters
 Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

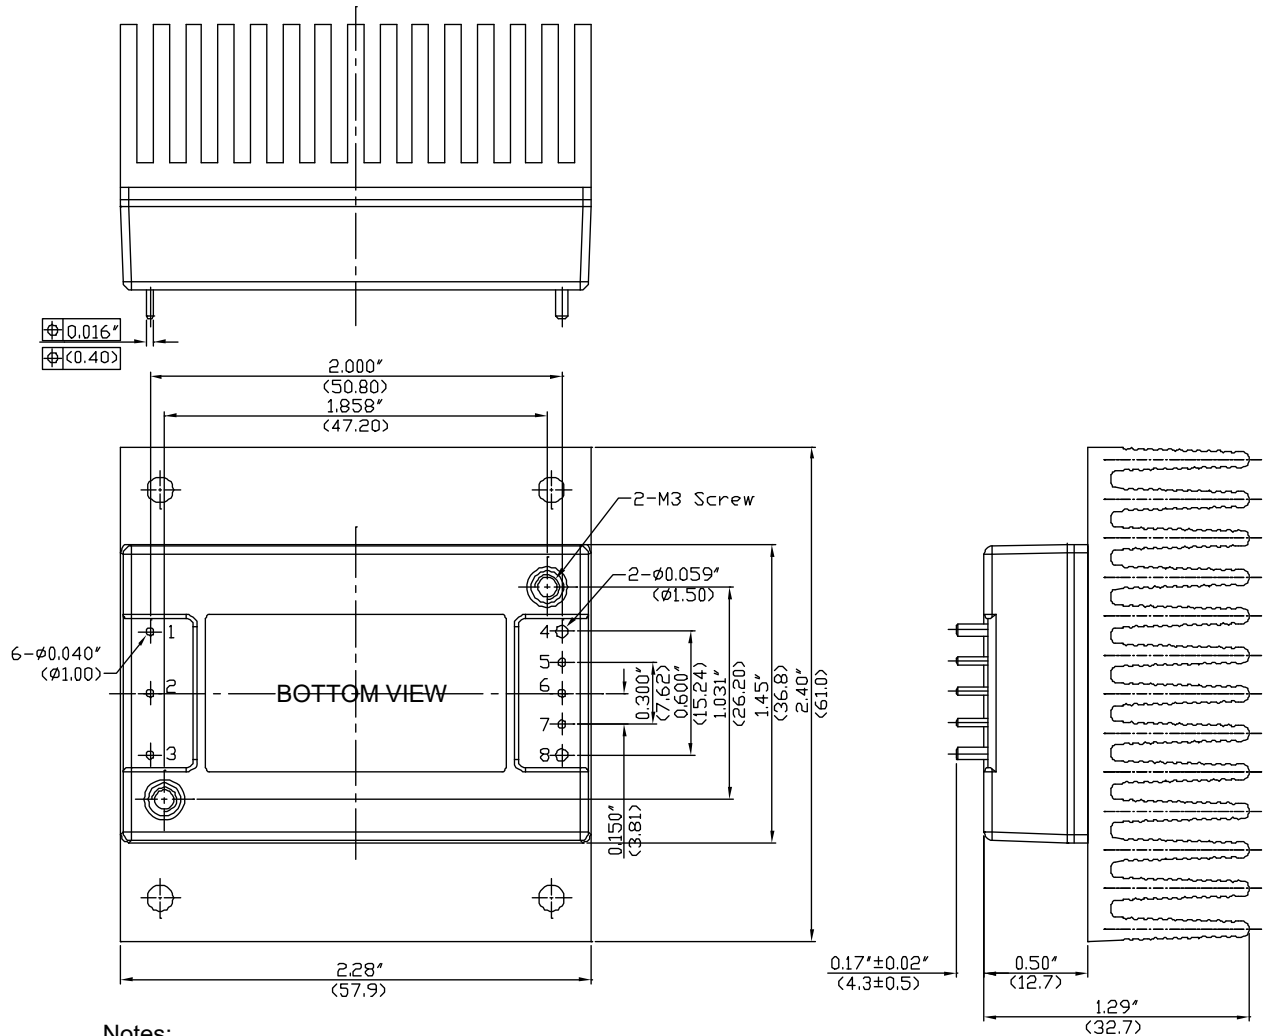Mechanical Information - 20mm ½ brick heat sink**Notes:****1. Pins:**

Material: Brass
 Plating: Nickel

2. Heatsink:

Material: aluminum
 Plating: Anodized

3. Weight : typical 140g

All dimensions in inches (mm).

Tolerance .xx= $\pm 0.02"$.xxx= $\pm 0.010"$ **4. The screw locked torque: MAX**

4.0kgf-cm/0.39N-m


Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

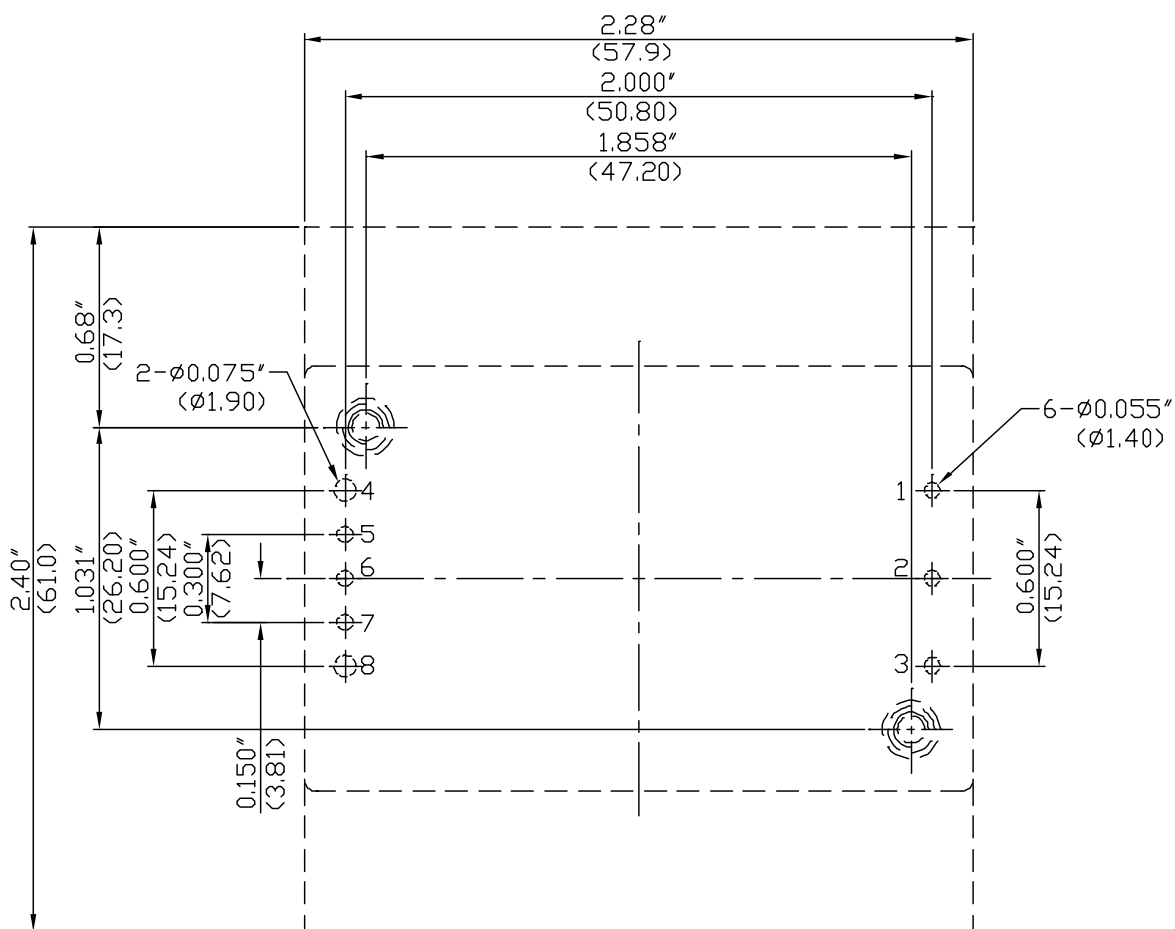RECOMMENDED FOOTPRINT
TOP VIEW

Technical Specification

PKM7000A series DC-DC Converters
Input 60-160 V, Output up to 20 A / 150 W

28701-BMR711 Rev. M

March 2022

© Flex

Soldering Information - Hole Mounting

The hole mounted product is intended for plated through hole mounting by wave or manual soldering. The pin temperature is specified to maximum to 270°C for maximum 10 seconds.

A maximum preheat rate of 4°C/s and maximum preheat temperature of 150°C is suggested. When soldering by hand, care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

A no-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside the product or between the product and the host board. The cleaning residues may affect long time reliability and isolation voltage.

Delivery Package Information


The products are delivered in antistatic clamshell trays

Tray Specifications


Material	Antistatic PS
Surface resistance	$10^5 < \text{Ohm/square} < 10^{11}$
Bakeability	This tray is not bake-able
Tray thickness	23.1 mm [0.9094 inch]
Box capacity	96 products (8 full trays/box)
Tray weight	60 g empty, 660g full tray




B-B Section

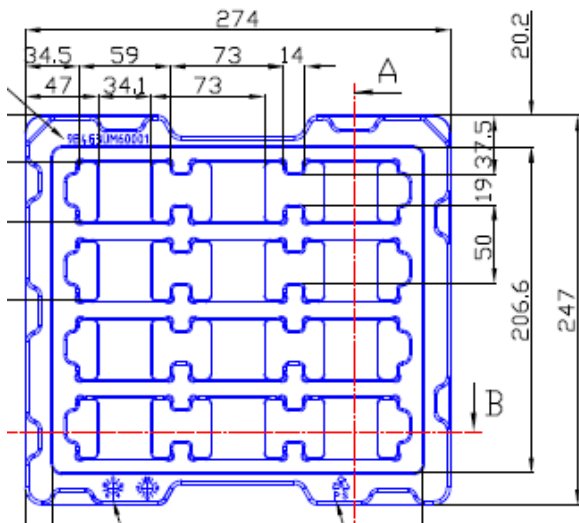


A. Package(with no heat sink)

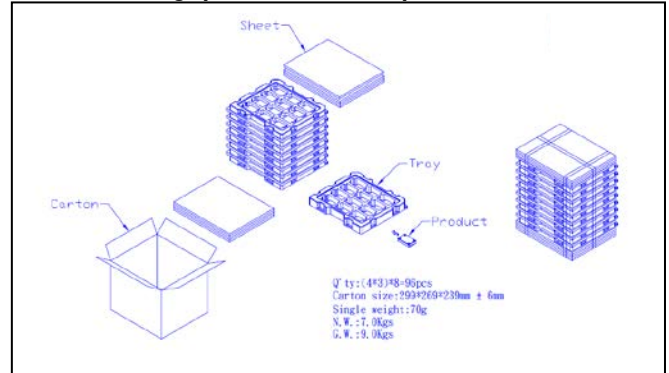


B. Package(with 10mm ¼ brick heat sink)

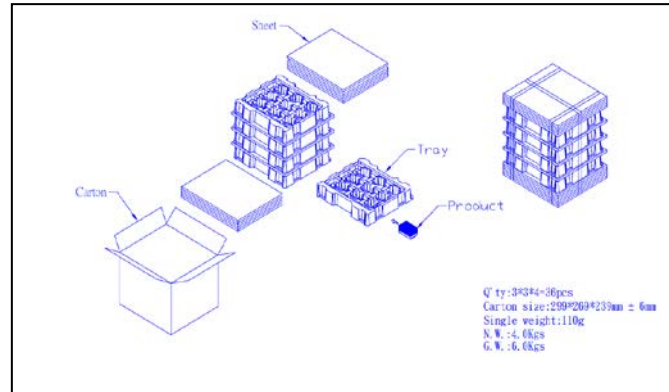

C. Package(with 20mm ¼ brick heat sink)

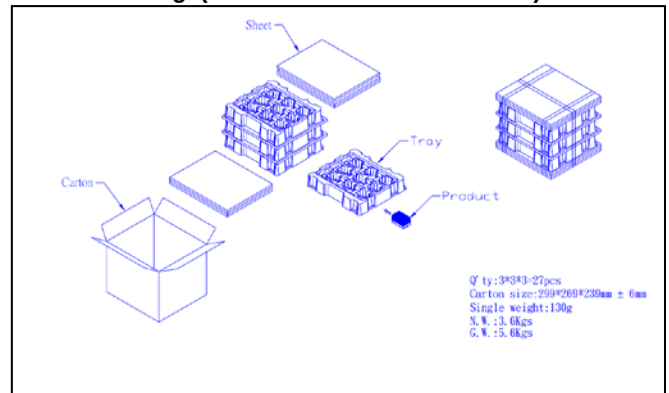

D. Package(with 20mm ½ brick heat sink)

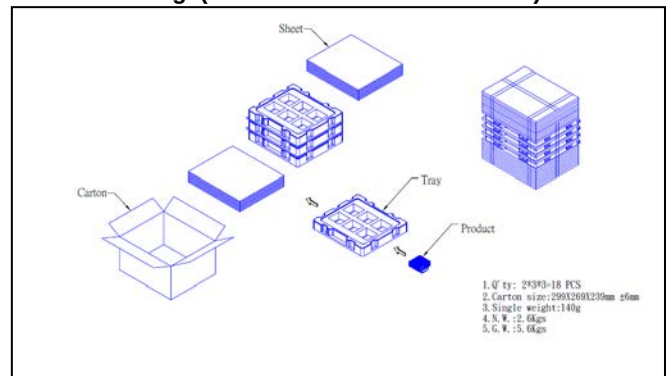

Technical Specification

PKM7000A series DC-DC Converters Input 60-160 V, Output up to 20 A / 150 W	28701-BMR711 Rev. M	March 2022
	© Flex	

Product Qualification Specification

Characteristics			
External visual inspection	IPC-A-610		
Change of temperature (Temperature cycling)	IEC 60068-2-14 Na	Temperature range Number of cycles Dwell/transfer time	-55 to 105°C 20 30 min/3 min
Cold (in operation)	IEC 60068-2-1 Ad	Temperature T _A Duration	-45°C 72 h
Damp heat	IEC 60068-2-30	Temperature Humidity Duration	45°C 95 % RH 72 hours
Dry heat	IEC 60068-2-2 Bd	Temperature Duration	125°C 1000 h
Electrostatic discharge susceptibility	IEC 61340-3-1, JESD 22-A114	Human body model (HBM)	Class 2, 2000 V
Immersion in cleaning solvents	IEC 60068-2-45 XA, method 2	Water Glycol ether {Isopropyl alcohol}	55°C 35°C {35°C}
Mechanical shock	IEC 60068-2-27 Ea	Peak acceleration Duration	200 g 6 ms
Moisture reflow sensitivity ¹	J-STD-020E	Level 1 (SnPb-eutectic) Level 3 (Pb Free)	225°C 260°C
Operational life test	MIL-STD-202G, method 108A	Duration	1000 h
Resistance to soldering heat ²	IEC 60068-2-20 Tb, method 1A	Solder temperature Duration	270°C 10-13 s
Robustness of terminations	IEC 60068-2-21 Test Ua1	Through hole mount products	All leads
Solderability	IEC 60068-2-20 test Ta ¹	Preconditioning Temperature, SnPb Eutectic Temperature, Pb-free	235°C 245°C
Vibration, broad band random	IEC 60068-2-64 Fh, method 1	Frequency Spectral density Duration	10 to 500 Hz 0.07 g ² /Hz 10 min in each direction

Notes

¹ Only for products intended for wave soldering (plated through hole products)

EN 50155		
Phenomenon	EN 50155 Reference Clause(s)	Reference Standard
Characteristic Test	12.2.1, 12.2.2, 5.1.1.1, 5.1.3, 12.2.9, 12.2.6	-
EMC	12.2.7, 12.2.8	EN 50121-3-2 EN 61000-4 EN 55011
Environmental Tests	12.2.3, 12.2.4, 12.2.5, 12.2.11	EN 60068-2 EN 61373