
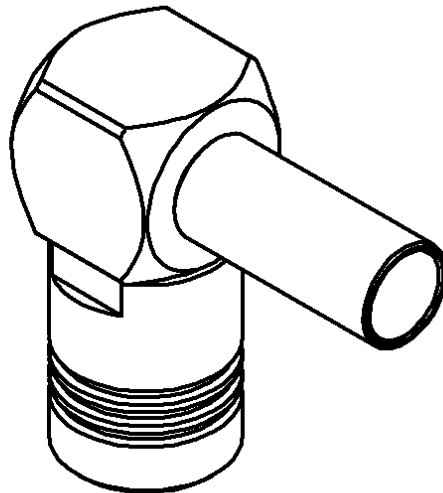
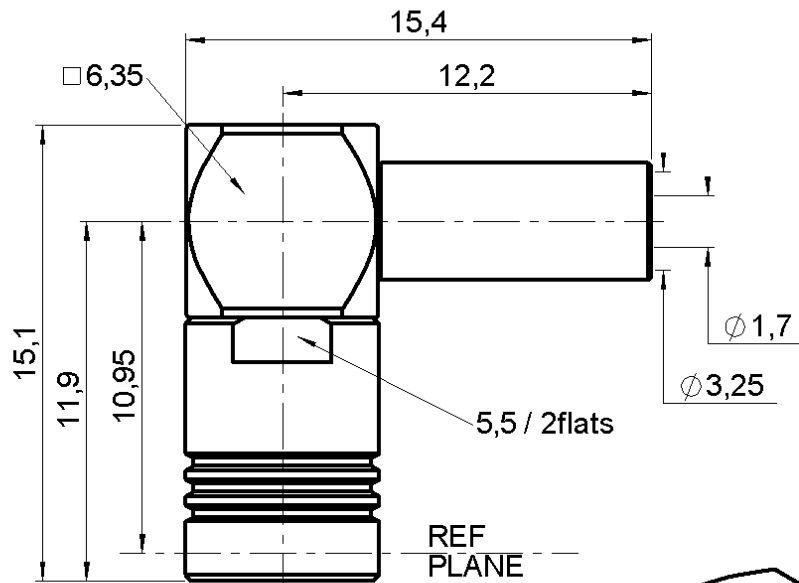


RIGHT ANGLE PLUG CRIMP TYPE

CABLE 2.6/50+75 S

R114.187.000

Series : SMB



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
INSULATOR	PTFE	
GASKET	-	
OTHERS PARTS	BRASS	GOLD 0.2 OVER NICKEL 2
-	-	-
-	-	-

Issue : 0216 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



RIGHT ANGLE PLUG CRIMP TYPE

CABLE 2.6/50+75 S

R114.187.000

Series : SMB

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-4	GHz
VSWR	1.35 + 0.040	x F(GHz) Maxi
Insertion loss	0.5	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (57	- F(GHz)) dB mini
Voltage rating	335	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	1000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini

Recommended torque

Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm

Mating life	500 Cycles mini
Weight	3.570 g

ENVIRONMENTAL

Operating temperature	-65/+165 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	3.50	8.00	16.0	0.00	12.5	0.00

Assembly instruction :

Recommended cable(s)

RG 316
RG 188
RG 179
RG 187
KX 22A

Cable retention

- pull off	110 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.211.000	CRIMPING TOOL	3.25
R282.235.003	CRIMPING DIES	3.25
R282.281.000	CRIMPING TOOL	2x4 (pos. 2)
R282.293.000	CRIMPING TOOL	-
R282.983.000	POSITONER FOR CRIMPING TOOL	-

OTHERS CHARACTERISTICS

-


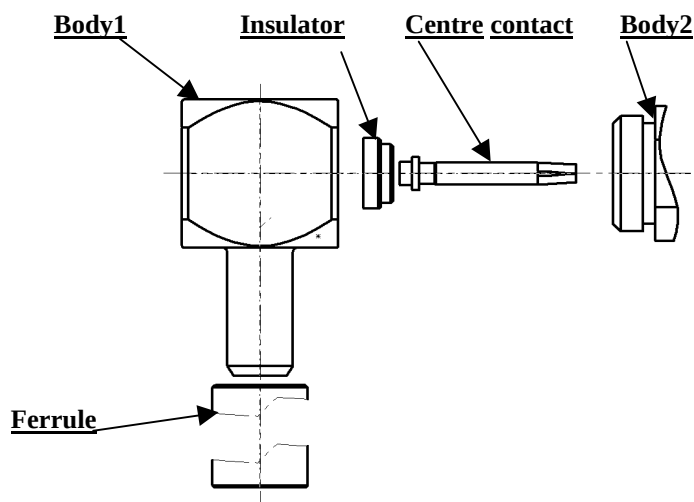
Issue : 0216 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




RIGHT ANGLE PLUG CRIMP TYPE**CABLE 2.6/50+75 S****R114.187.000**

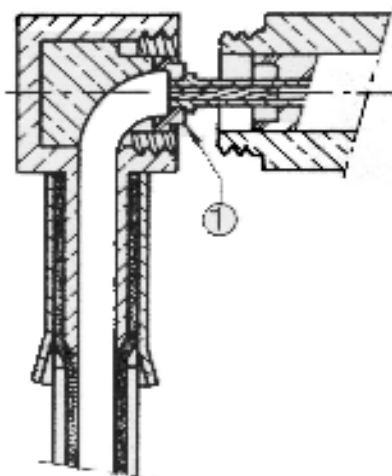
Series : SMB

COMPONENTS**STRIPPING DIMENSIONS****1**

Mount the ferrule.
Strip off the cable

**2**

- Push the cable into the body1 of the connector the jacket must be against the sleeve.
- Mount the insulator ①.
- Crimp the centre contact against the insulator with crimping tool.
- Remove the cable to put the insulator abutment the body2
- Crimp the ferrule with crimping tool.
- Mount the front insulator on the centre contact.
- Screw the body1 into the cable assembly.

**Issue : 0216 B**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

