


HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EF25 Platforms - THT Horizontal



- AC/DC and DC/DC Switching Transformers
- Reinforced Insulation
- 3000 Vrms Hi-pot
- Height: 20.8mm Max
- Footprint: 29.2mm x 27.9mm Max
- Topology: Flyback

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA1297NL	Pri. Inductance	(3-1)	380μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-1) with (7-9) shorted	11μH MAX	
	DCR	(3-1)	945mΩ MAX	
		(9-7)	40mΩ MAX	
		(4-5)	85mΩ MAX	
	Hi-Pot	Pri-Sec	3000Vrms	
K1 Factor	1528.3			
PA2547NL	Pri. Inductance	(3-1)	1850μH ±15%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-1) with (7-9) shorted	21μH MAX	
	DCR	(3-1)	930mΩ MAX	
		(9-7)	223mΩ MAX	
		(4-5)	408mΩ MAX	
	Hi-Pot	Pri-Sec	3000Vrms	
K1 Factor	4152.8			
PA2611NL	Pri. Inductance	1-3	9850μH ±15%	HALF-BRIDGE TRANSFORMER
	Lk. Inductance	(1-3) with (6,7,8,9,10) shorted	40μH MAX	
	DCR	(1-3)	790mΩ MAX	
		(10-8)	220mΩ MAX	
		(7-6)	15mΩ MAX	
		(4-5)	80mΩ MAX	
	Hi-Pot	Pri-Sec	3000Vrms	
K1 Factor	2.7			
PA2676NL	Pri. Inductance	(3-1)	860μH ±15%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-1) with (7-9) shorted	78μH MAX	
	DCR	(3-1)	910mΩ MAX	
		(9-7)	3050mΩ MAX	
		(4-5)	350mΩ MAX	
	Hi-Pot	Pri-Sec	4000Vrms	
K1 Factor	1537.3			
PA2804NL	Pri. Inductance	(1-3)	275μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(1-3) with (4,5,6,7,8,9,10) shorted	8.4μH MAX	
	DCR	(1-3)	250mΩ MAX	
		(9-10)	160mΩ MAX	
		(5-4)	400mΩ MAX	
		(6-7)	311mΩ MAX	
	Hi-Pot	Pri-Sec	3000Vrms	
	K1 Factor	1179.8		

HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EF25 Platforms - THT Vertical




Notes

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk}(A)$$
4. In high volt-µsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 3.9E-13 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$
 where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * \Delta(A)$
 For Forward Topology: $\Delta B = K1_Factor * Volt\text{-}\mu sec$
5. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffix parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

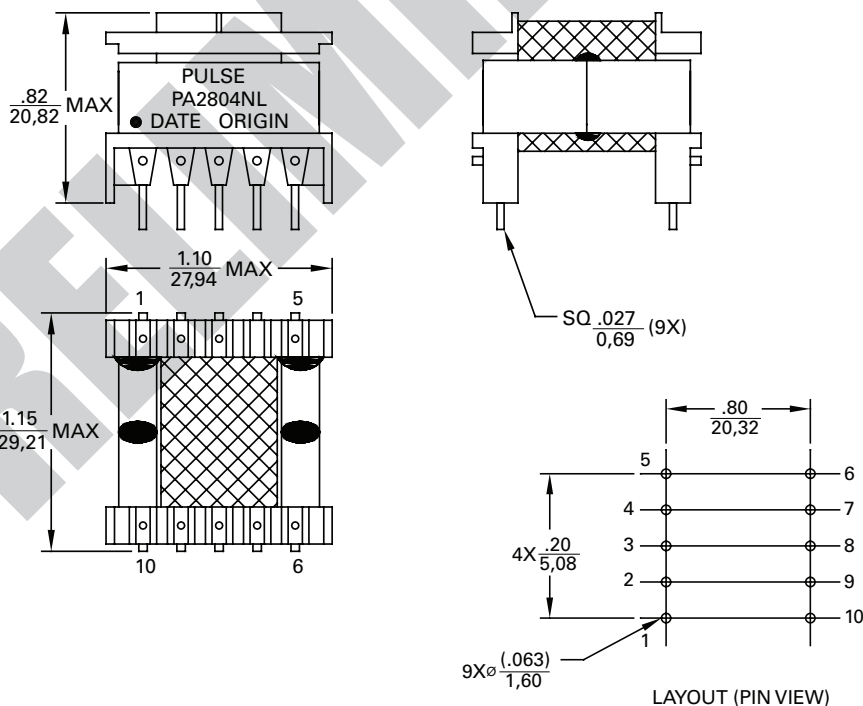

For More Information:

Pulse Worldwide Headquarters
 12220 World Trade Dr.
 San Diego, CA 92128
 U.S.A.

www.pulseeng.com
 Tel: 858 674 8100
 Fax: 858 674 8262

Pulse Europe
 Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Tel: 49 7032 7806 0
 Fax: 49 7032 7806 135

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Rd.
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057

TEL: 86 755 33966678
 FAX: 86 755 33966700

Pulse North China
 Room 1503
 XinYin Building
 No. 888 YiShan Rd.
 Shanghai 200233
 China

Tel: 86 21 54643211/2
 Fax: 86 21 54643210

Pulse South Asia
 135 Joo Seng Rd.
 #03-02
 PM Industrial Bldg.
 Singapore 368363

TEL: 65 6287 8998
 FAX: 65 6280 0080

Pulse North Asia
 No. 26, Kao Ching Rd.
 Yang Mei Chen
 Taoyuan Hsien
 Taiwan
 R. O. C.

Tel: 886 3 4643715
 Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.
 © Copyright, 2009. Pulse Engineering, Inc. All rights reserved.