

GV804B SERIES

SURFACE MOUNT RECTIFIER

Voltage

400~1000 V

Current

8 A

TO-277B


Unit : inch(mm)

Features


- For surface mounted applications in order to optimize board space
- Ultra thin profile package for space constrained utilization
- Easy pick and place package suitable for automated handling
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: TO-277B package
- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- Weight: 0.00327 ounces, 0.093505 grams
- Marking: Part number



TOP VIEW

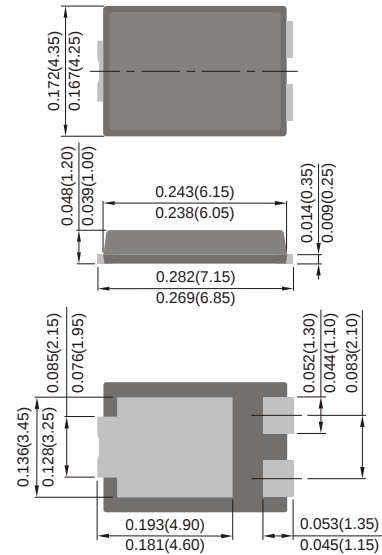

Maximum Ratings And Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	GV804B	GV806B	GV808B	GV810B	UNIT
Maximum repetitive peak reverse voltage		V _{RRM}	400	600	800	1000	V
Maximum rms voltage		V _{RMS}	280	420	560	700	V
Maximum dc blocking voltage		V _R	400	600	800	1000	V
Maximum average forward rectified current		I _{F(AV)}	8				A
Peak forward surge current : 8.3ms single half sine-wave superimposed on rated load		I _{FSM}	200				A
Maximum forward voltage at 8A		V _F	1.1				V
Maximum dc reverse current at rated dc blocking voltage		I _R	5				μA
Typical junction capacitance Measure at 1MHz and applied V _R =4V		C _J	55				pF
Typical thermal resistance	(Note 1)	R _{θJC}	3				°C/W
	(Note 2)	R _{θJA}	110				
Operating junction temperature range		T _J	-55 to +150				°C
Storage temperature range		T _{STG}	-55 to +150				°C

Note : 1. Mounted on a 10cm x 10cm x 0.5mm copper pad area.

2. Mounted on a FR4 PCB, single-sided copper, mini pad.

GV804B SERIES

TYPICAL CHARACTERISTIC CURVES

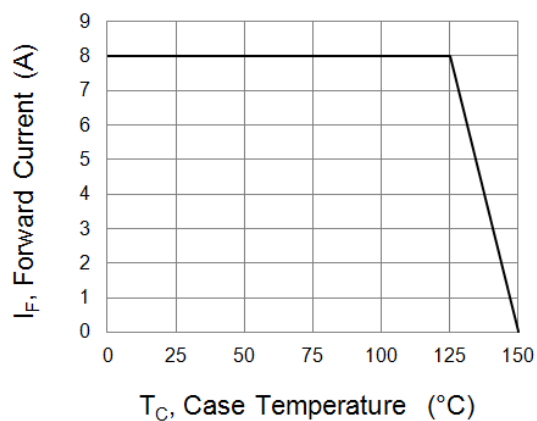


Fig.1 Forward Current Derating Curve

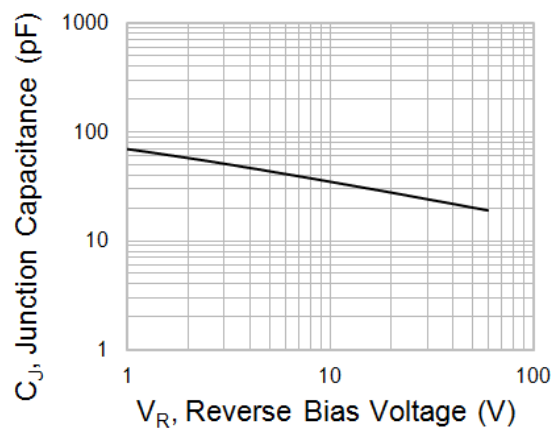


Fig.2 Typical Junction Capacitance

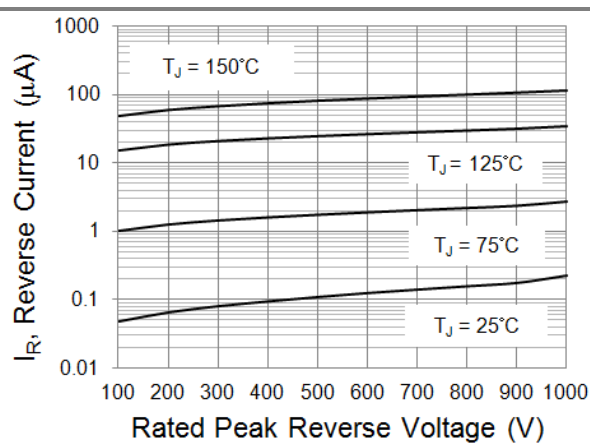


Fig.3 Typical Reverse Characteristics


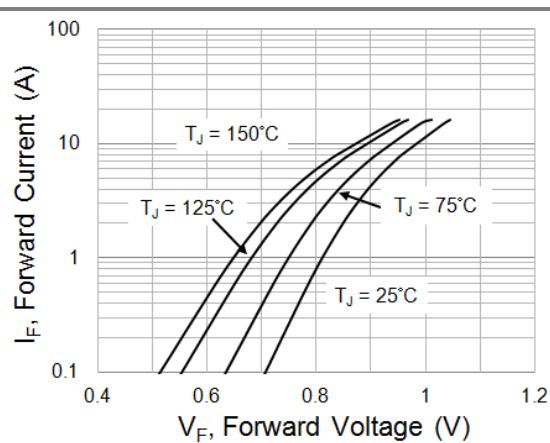


Fig.4 Typical Forward Characteristics

GV804B SERIES

MOUNTING PAD LAYOUT

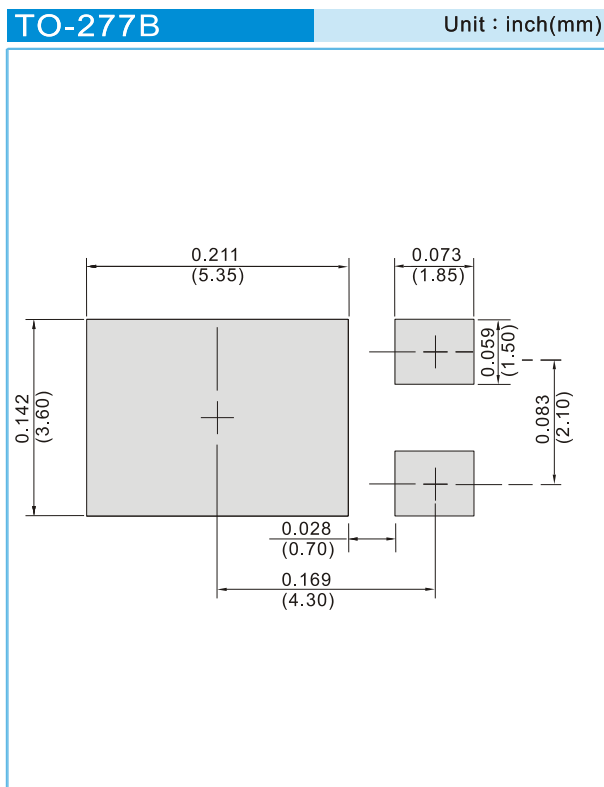

ORDER INFORMATION

- Packing information
T/R – 5K per 13" plastic Reel


GV804B SERIES

Part No_packing code_Version

GV804B_R2_00001

For example :

RB500V-40_R2_00001

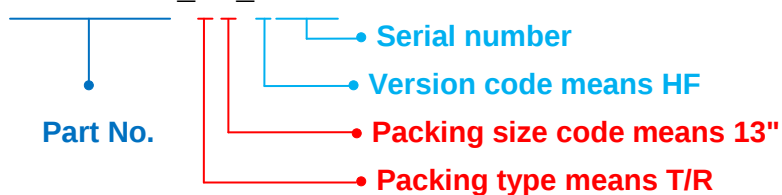

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



GV804B SERIES

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.