





High Frequency Wire Wound Transformers

ER7.5 Platforms - SMT - PA4470.XXXNL



-  **Power Range:** Up to 1.8 W
-  **Height:** 6.0 mm Max
-  **Footprint:** 9.5 mm x 8.0 mm Max
-  **Topology:** Flyback

Pulse PN	Electrical Specifications @25°C - Operating Temperature -40°C to 130°C ¹				Schematic	
PA4470.001NL	Pri. Inductance	(4-3)	216	uH +/- 25%	33-57v 200kHz 10v/50mA	
	Lk. Inductance	(4-3) w/ (5,6,7,8) shorted	3.5	uH Max		
	DCR	(4-3)	2.6	Ohms Max		
		(2-1)	2.72			
		(5-6)	0.11			
		(7-8)	0.12			
	Hi-Pot	Pri-Sec	1650	Vdc		
K1 Factor	7187					
PA4470.002NL	Pri. Inductance	(4-3)	216	uH +/- 25%	33-57v 200kHz 10v/50mA	
	Lk. Inductance	(4-3) w/ (5,6,7,8) shorted	3.5	uH Max		
	DCR	(4-3)	2.6	Ohms Max		
		(2-1)	1.8			
		(5-6)	0.32			
		(7-8)	0.32			
	Hi-Pot	Pri-Sec	1650	Vdc		
K1 Factor	7187					
PA4470.003NL	Pri. Inductance	(4-3)	216	uH +/- 25%	33-57v 200kHz 10v/50mA	
	Lk. Inductance	(4-3) w/ (5,6,7,8) shorted	3.5	uH Max		
	DCR	(4-3)	2.6	Ohms Max		
		(2-1)	2.72			
		(5-6)	1.2			
		(7-8)	1.2			
	Hi-Pot	Pri-Sec	1650	Vdc		
K1 Factor	7187					
PA4470.004NL	Pri. Inductance	(4-3)	21.8	uH +/- 25%	10-14v 200kHz 10v/50mA	
	Lk. Inductance	(4-3) w/ (5,6,7,8) shorted	0.5	uH Max		
	DCR	(4-3)	0.3	Ohms Max		
		(2-1)	1.6			
		(5-6)	0.11			
		(7-8)	0.12			
	Hi-Pot	Pri-Sec	1650	Vdc		
K1 Factor	2357					

High Frequency Wire Wound Transformers

ER7.5 Platforms - SMT - PA4470.XXXNL



Pulse PN	Electrical Specifications @25° C - Operating Temperature -40° C to 130° C ¹				Schematic	
PA4470.005NL	Pri. Inductance	(4-3)	21.8 uH +/- 25%			10-14v 200kHz 10v/50mA 5v/0.9W 5v/0.9W
	Lk. Inductance	(4-3) w/ (5,6,7,8) shorted	0.5 uH Max			
	DCR	(4-3)	0.3	Ohms Max		
		(2-1)	1.6			
		(5-6)	0.15			
		(7-8)	0.16			
	Hi-Pot	Pri-Sec	1650 Vdc			
K1 Factor	2357					
PA4470.006NL	Pri. Inductance	(4-3)	21.8 uH +/- 25%			10-14v 200kHz 10v/50mA 12v/0.9W 12v/0.9W
	Lk. Inductance	(4-3) w/ (5,6,7,8) shorted	0.5 uH Max			
	DCR	(4-3)	0.3	Ohms Max		
		(2-1)	1.6			
		(5-6)	1.15			
		(7-8)	1.2			
	Hi-Pot	Pri-Sec	1650 Vdc			
K1 Factor	2357					

Notes:

- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2600Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk} \text{ (A)}$$
- In high volt-μsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:


$$CoreLoss \text{ (W)} = 3.84E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$
 where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * \Delta I \text{ (A)}$
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA4470.001NL becomes PA4470.001NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=24mm), pitch (Po=16mm) and depth (Ko=5.8mm).

High Frequency Wire Wound Transformers


ER7.5 Platforms - SMT - PA4470.XXXNL

Mechanical

PA4470.XXXNL

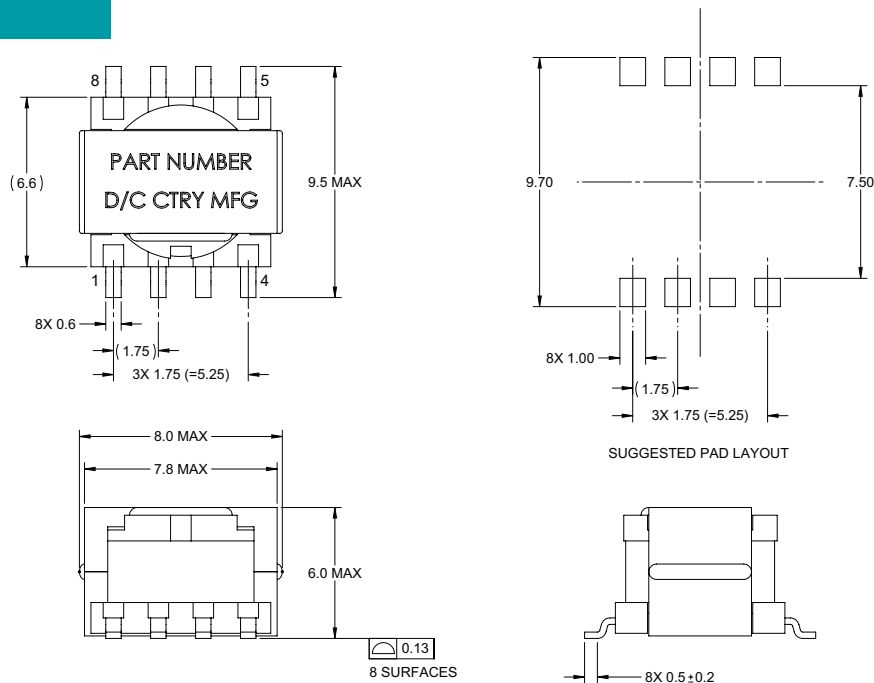

TAPE & REEL INFO

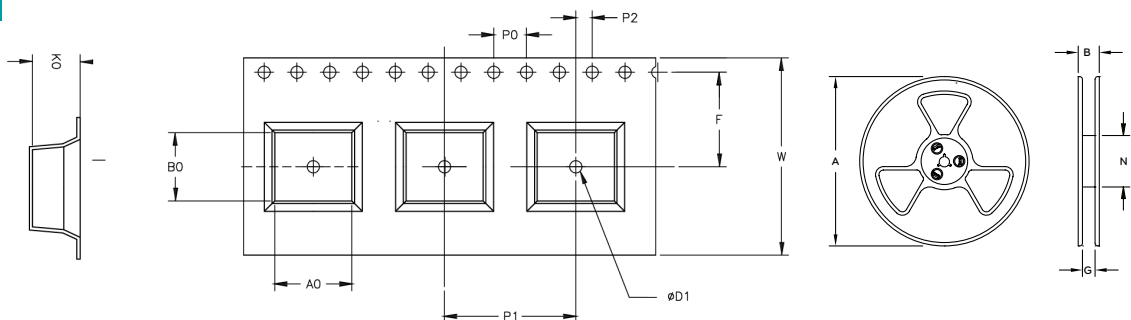

SURFACE MOUNTING TYPE, REEL/TAPE LIST

	REEL SIZE (mm)						TAPE SIZE (mm)										QTY
	A	A	B	B	G	N	E	F	P ₁	P ₀	P	W	T	K	K ₀	PCS/REEL	
PA4470.XXXNL	Ø330	9.4	N/A	8.3	12	100	N/A	11.5	N/A	4	N/A	24	N/A	5.8	3.3	700	

Notes:

1. Inductance is measure, where applicable, with both primary windings connected in series (2 to 5, with 3 and 4 shorted).
2. Leakage inductance is measured with both primary windings connected in series (where applicable) with all other windings shorted.