

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
CONTACT: BRASS
SHELL: ZINC ALLOY
NUT: BRASS
BACK SHELL: BRASS

FINISH

CONTACT: GOLD 10 μ " MIN.
OVER 50 μ " NICKEL
SHELL: NICKEL PLATED
NUT: NICKEL PLATED
BACK SHELL: NICKEL PLATED

ELECTRICAL

RATED CURRENT: 0.5A
RATED VOLTAGE: 50VAC/60VDC
INSULATION RESISTANCE: 100 M Ω hms MIN.
CONTACT RESISTANCE: 10 m Ω hms MAX.
WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
MAX WIRE AWG: 24

858-X08-103RLS4

*SEE PAGE 2

0 = Ø7.5mm BACK SHELL
L = Ø9.0mm BACK SHELL3 = BRASS/NICKEL (B/N) BACK SHELL & NUT
T = B/N BACK SHELL / STAINLESS STEEL NUT1 = GOLD FLASH
4 = 10 μ " GOLD

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

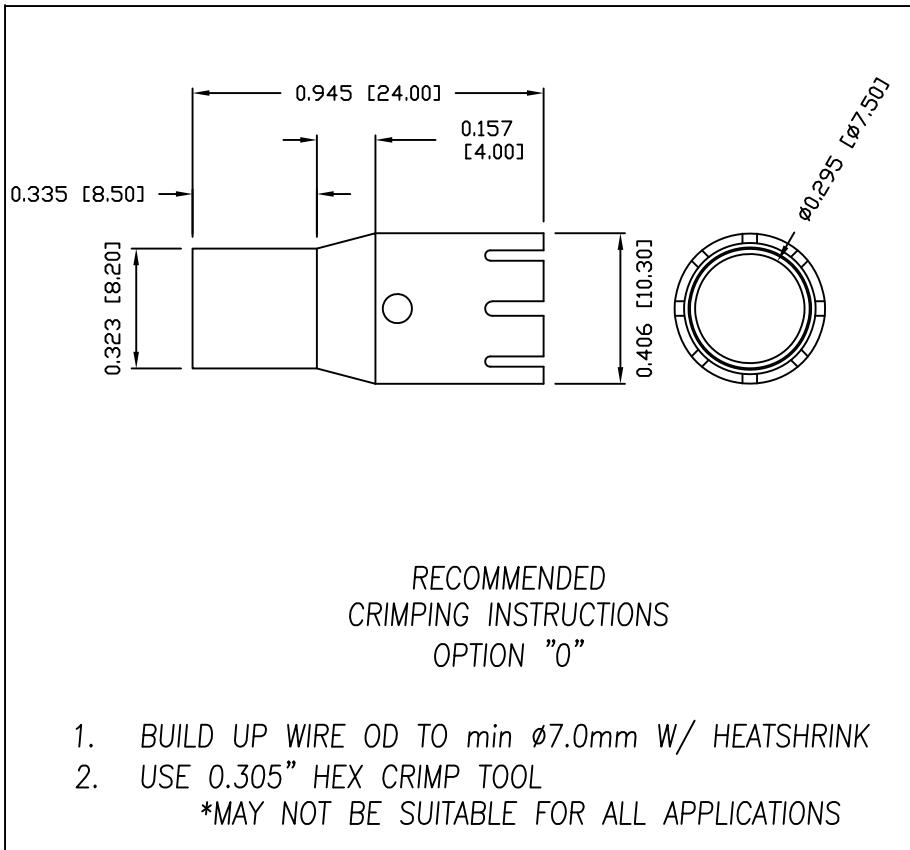
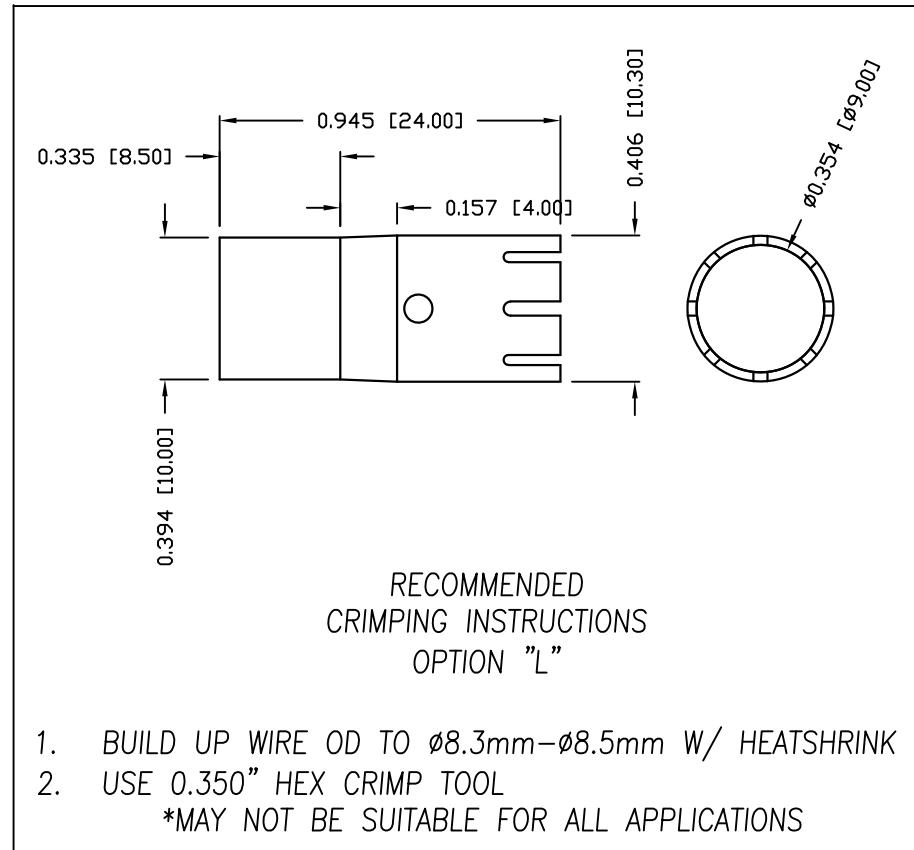
DRAWN:
M. SIGMON
DATE:
08/12/2016

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET 1	OF 2	REV 7
DWG NO.			858-X08-103RLS4

BACK SHELL
OPTION "0"BACK SHELL
OPTION "L"

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON
DATE:
08/12/2016

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET 2	OF 2	REV 7
DWG NO. 858-X08-103RLS4			