

## LISA3-RS-PIN

~15° spot beam with location pin installation



### TECHNICAL SPECIFICATIONS:


Dimensions	Ø 10.0 mm
Height	6.9 mm
Fastening	glue
ROHS compliant	yes 

### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
LISA3-RS	Single lens	PMMA	clear	
LISA3-HLD-PIN	Holder	PC	black	


### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)	
FP16558_LISA3-RS-PIN » Box size: 310 x 230 x 60 mm	Single lens	2000	300	100	1.3

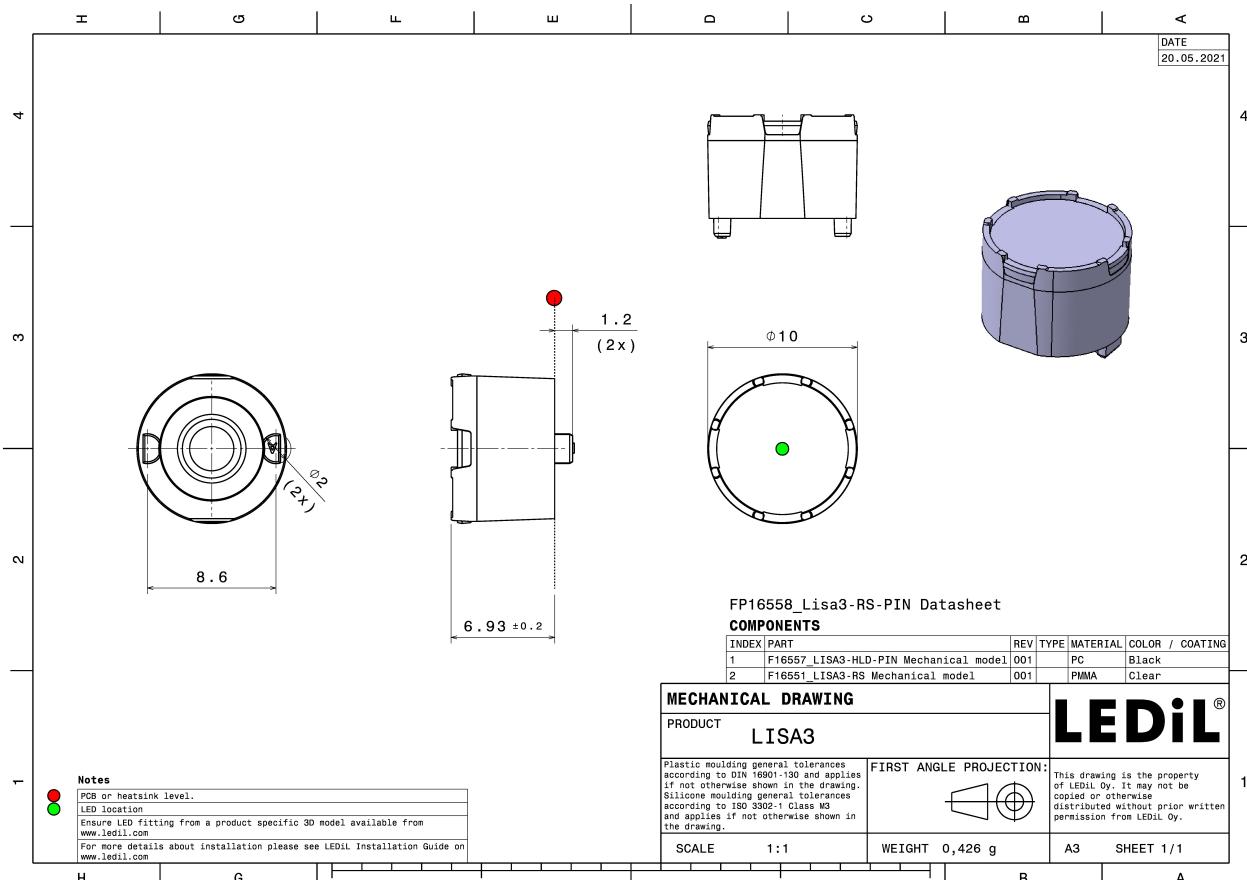

See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


### PHOTOMETRIC DATA (MEASURED):

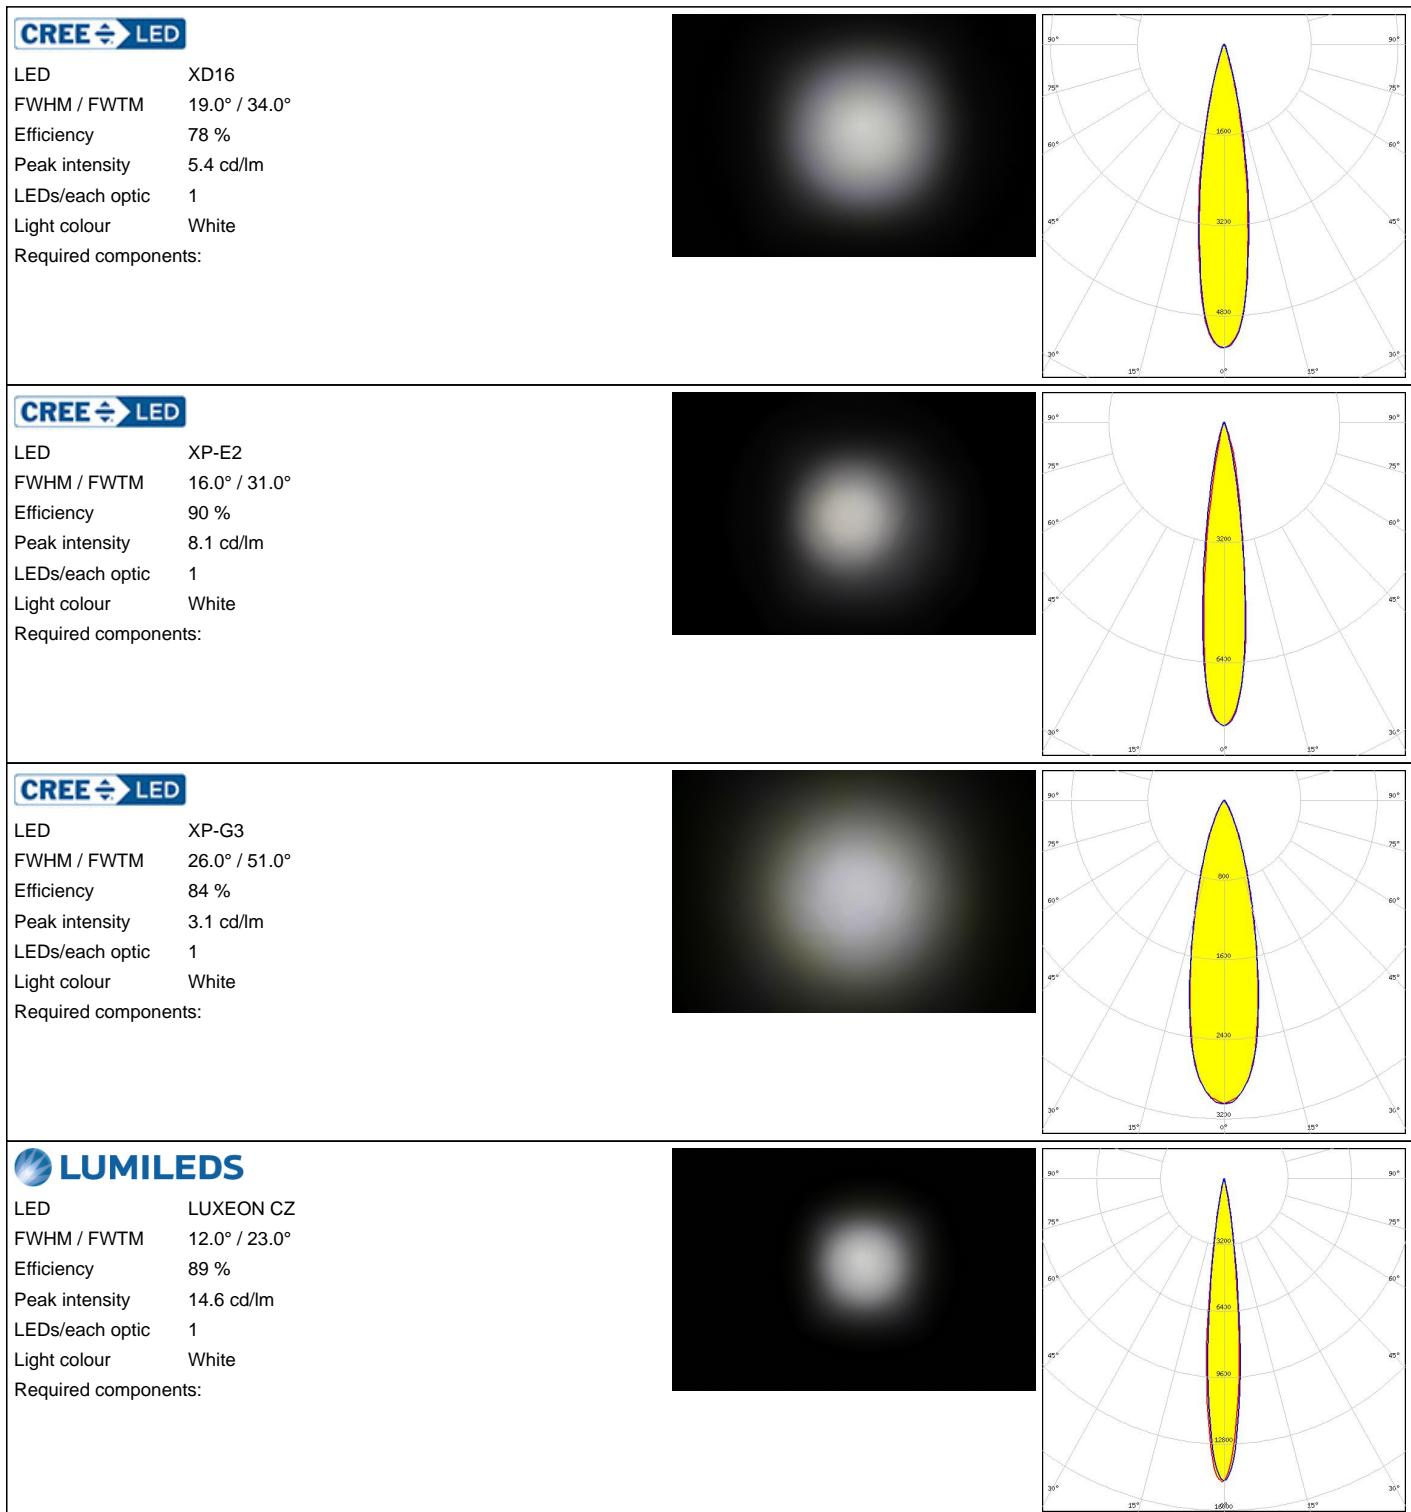



## PHOTOMETRIC DATA (MEASURED):




LED NF2x757G  
FWHM / FWTM 25.0° / 52.0°  
Efficiency 88 %  
Peak intensity 3.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

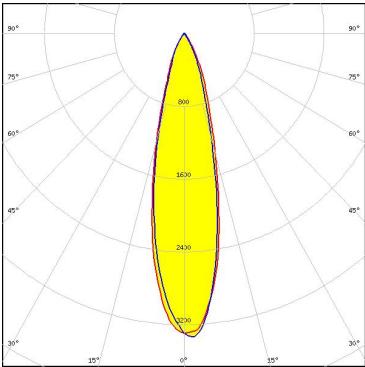



LED NVSW219F  
FWHM / FWTM 26.0° / 52.0°  
Efficiency 90 %  
Peak intensity 3.2 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

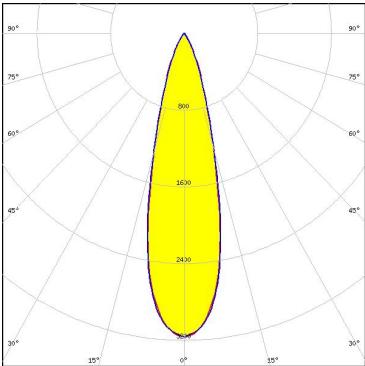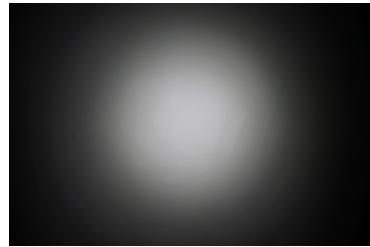

Opto Semiconductors  
LED OSCONIQ C 2424  
FWHM / FWTM 18.0° / 35.0°  
Efficiency 88 %  
Peak intensity 6.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

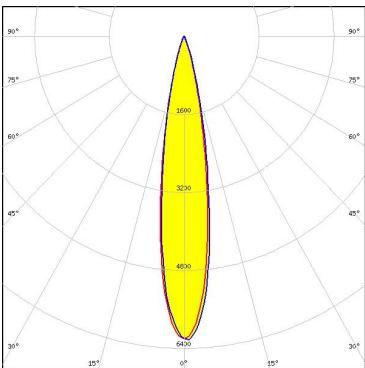



Opto Semiconductors  
LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM 21.0° / 40.0°  
Efficiency 88 %  
Peak intensity 4.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

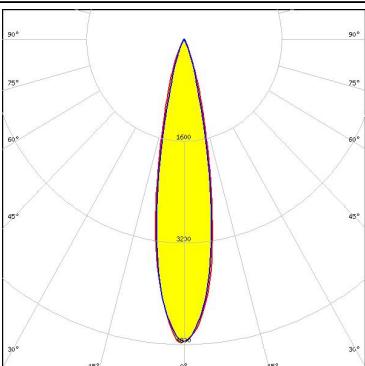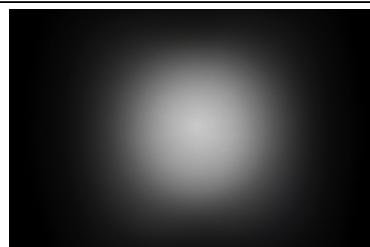

## PHOTOMETRIC DATA (MEASURED):



### SAMSUNG

LED LH351C  
FWHM / FWTM 28.0° / 51.0°  
Efficiency 90 %  
Peak intensity 3.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:



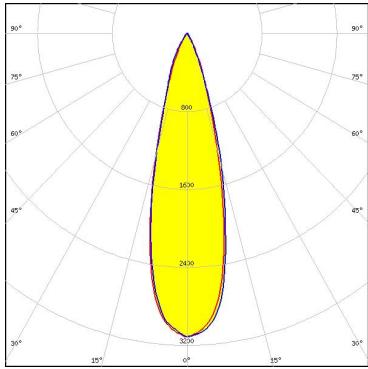
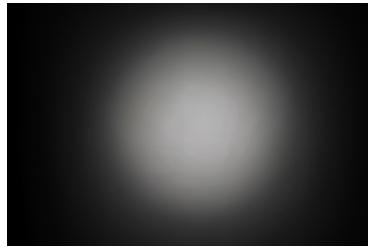


### SEOUL SEMICONDUCTOR

LED Z5M4  
FWHM / FWTM 29.0° / 51.0°  
Efficiency 89 %  
Peak intensity 3.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

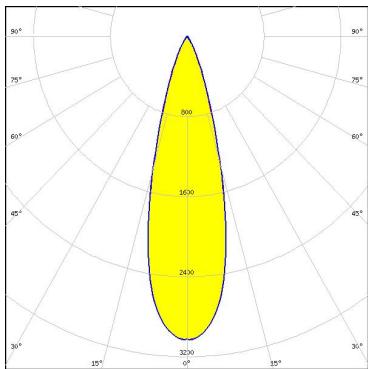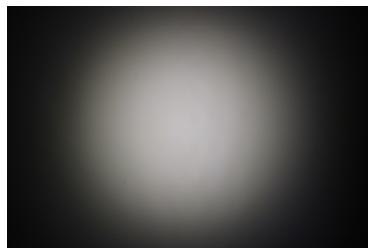

### PHOTOMETRIC DATA (SIMULATED):

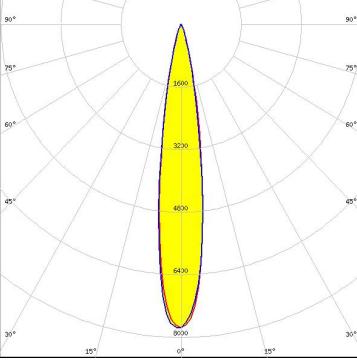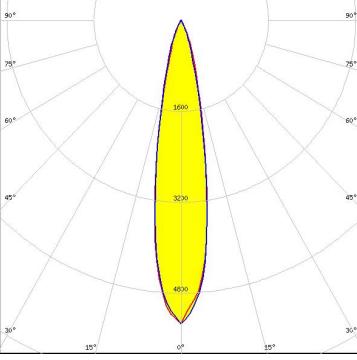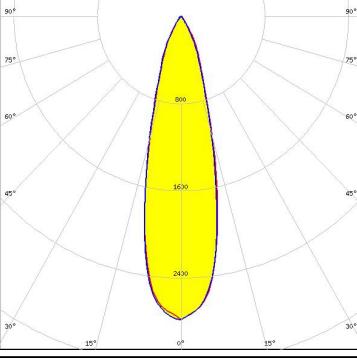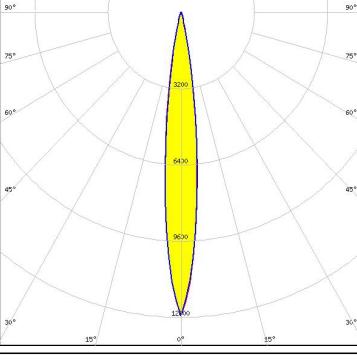
<p><b>CREE → LED</b></p> <p>LED XP-E FWHM / FWTM 16.0° / 32.0° Efficiency 91 % Peak intensity 7.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p><b>CREE → LED</b></p> <p>LED XP-G2 FWHM / FWTM 20.0° / 40.0° Efficiency 89 % Peak intensity 5.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p><b>CREE → LED</b></p> <p>LED XP-G2 HE FWHM / FWTM 27.0° / 57.0° Efficiency 86 % Peak intensity 2.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p><b>CREE → LED</b></p> <p>LED XP-P FWHM / FWTM 12.0° / 26.0° Efficiency 97 % Peak intensity 12.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

## PHOTOMETRIC DATA (SIMULATED):




LED	XQ-E HI
FWHM / FWTM	18.0° / 34.0°
Efficiency	82 %
Peak intensity	6.4 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

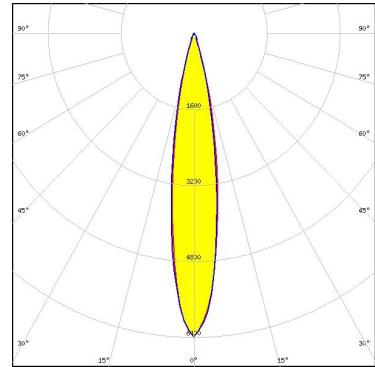


LED	LUXEON 2835 Line
FWHM / FWTM	16.0° / 36.0°
Efficiency	89 %
Peak intensity	7 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

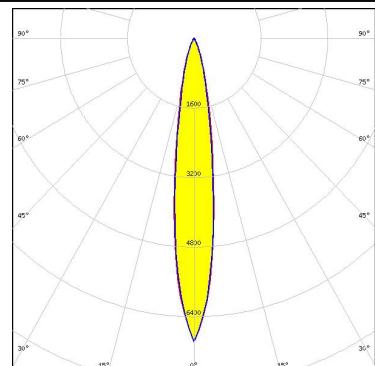


LED	LUXEON C
FWHM / FWTM	16.0° / 32.0°
Efficiency	78 %
Peak intensity	6.3 cd/lm
LEDs/each optic	1
Light colour	Red

Required components:

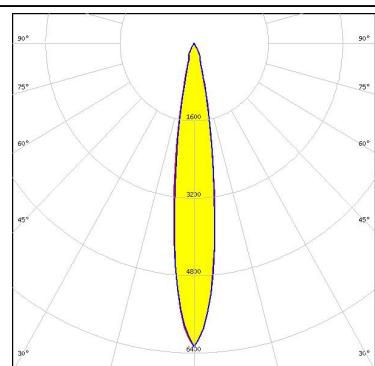

LED	LUXEON V2
FWHM / FWTM	22.0° / 51.0°
Efficiency	90 %
Peak intensity	3.8 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

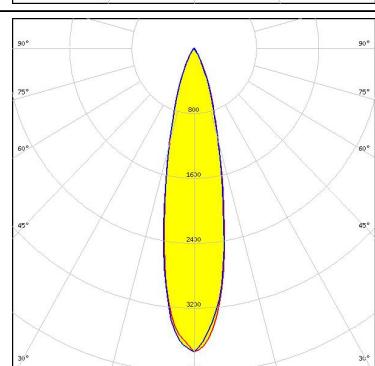


### PHOTOMETRIC DATA (SIMULATED):

#### LUMILEDS

LED	LUXEON Z
FWHM / FWTM	12.0° / 23.0°
Efficiency	87 %
Peak intensity	13.2 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

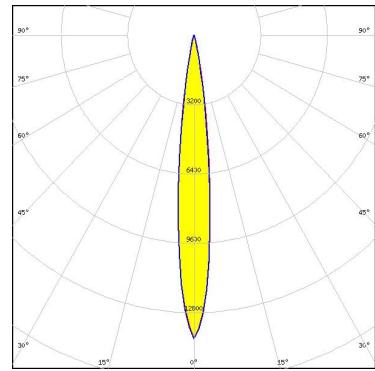

#### LUMILEDS

LED	LUXEON Z ES
FWHM / FWTM	15.0° / 30.0°
Efficiency	88 %
Peak intensity	9 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

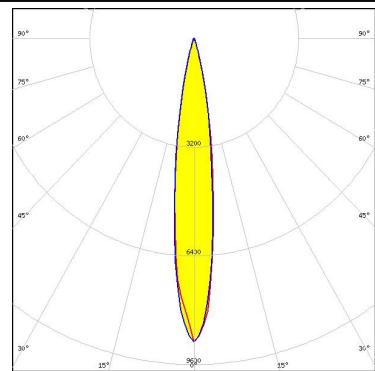

#### LUMINUS

LED	SST-20
FWHM / FWTM	20.0° / 40.0°
Efficiency	86 %
Peak intensity	5.2 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

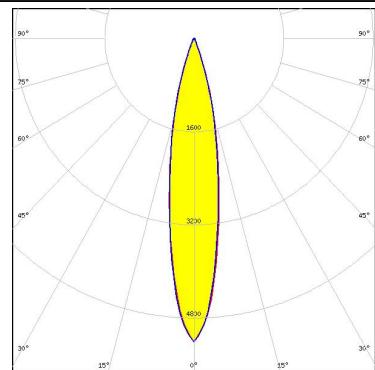

#### NICHIA

LED	NCSU276C
FWHM / FWTM	16.0° / 34.0°
Efficiency	90 %
LEDs/each optic	1
Light colour	UV-A

Required components:

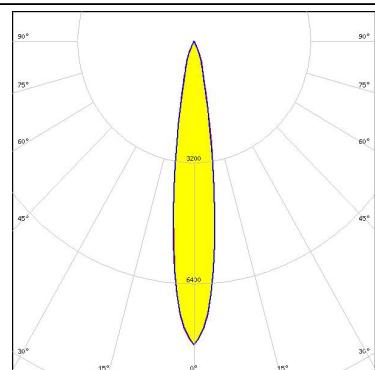


### PHOTOMETRIC DATA (SIMULATED):




LED	NCSxx19B
FWHM / FWTM	18.0° / 37.0°
Efficiency	84 %
Peak intensity	5.9 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

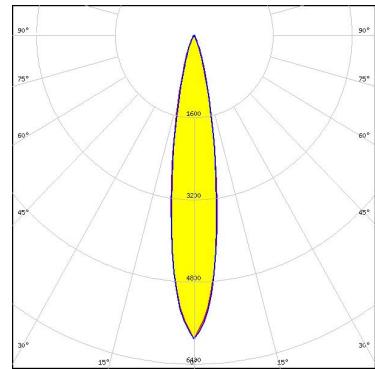


LED	NVSxx19B/NVSxx19C
FWHM / FWTM	25.0° / 50.0°
Efficiency	85 %
Peak intensity	3.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

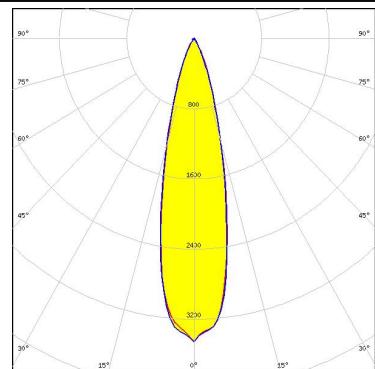


LED	Duris S5 (2 chip)
FWHM / FWTM	20.0° / 44.0°
Efficiency	87 %
Peak intensity	7.1 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

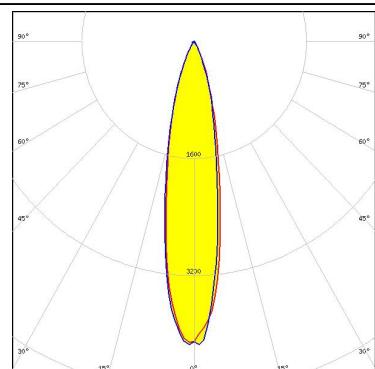

LED	Duris S5 (Single chip)
FWHM / FWTM	20.0° / 43.0°
Efficiency	86 %
Peak intensity	4.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

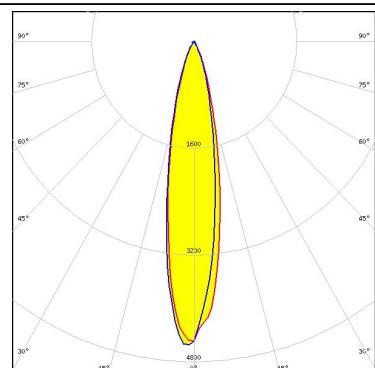

### PHOTOMETRIC DATA (SIMULATED):

#### OSRAM

Opto Semiconductors

LED OSONIQ P 3030

FWHM / FWTM 14.0° / 30.0°


Efficiency 86 %

Peak intensity 8.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

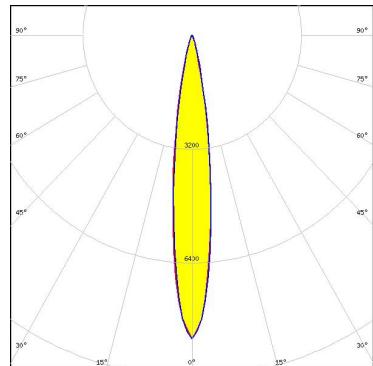

#### OSRAM

Opto Semiconductors

LED OSONIQ P 3737 (2W version)

FWHM / FWTM 20.0° / 40.0°


Efficiency 88 %

Peak intensity 5.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

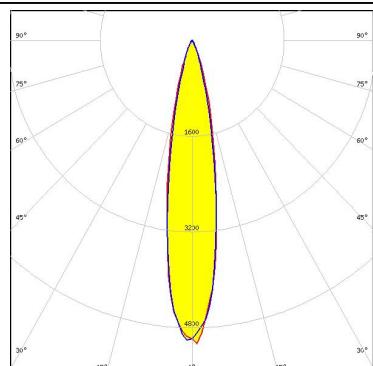

#### OSRAM

Opto Semiconductors

LED OSLON Black

FWHM / FWTM 17.0° / 32.0°


Efficiency 87 %

Peak intensity 7.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

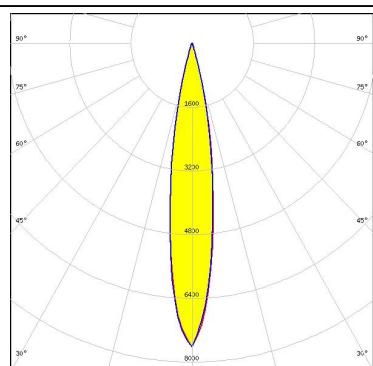

#### OSRAM

Opto Semiconductors

LED OSLON Square Flat

FWHM / FWTM 16.0° / 33.0°


Efficiency 89 %

Peak intensity 7.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

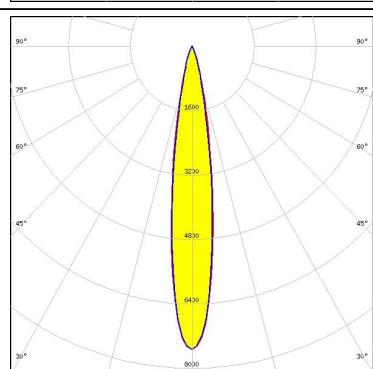

## PHOTOMETRIC DATA (SIMULATED):

### OSRAM

Opto Semiconductors

LED OSLON SSL 120

FWHM / FWTM 16.0° / 29.0°


Efficiency 90 %

Peak intensity 9 cd/lm

LEDs/each optic 1

Light colour Hyper Red

Required components:

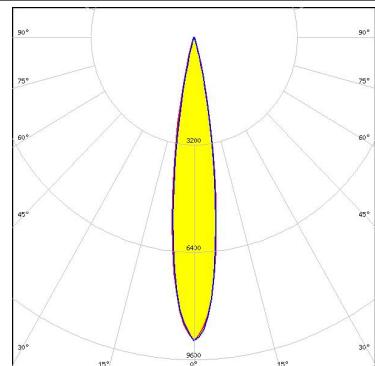

### OSRAM

Opto Semiconductors

LED OSLON SSL 150

FWHM / FWTM 14.5° / 29.0°


Efficiency 88 %

Peak intensity 8.7 cd/lm

LEDs/each optic 1

Light colour White

Required components:

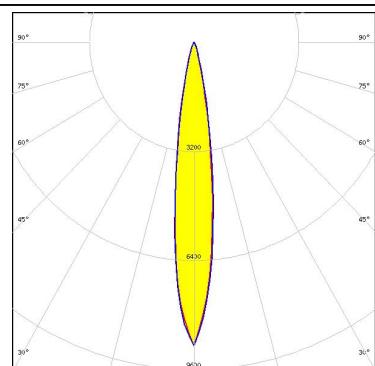

### OSRAM

Opto Semiconductors

LED OSLON SSL 80

FWHM / FWTM 15.0° / 31.0°


Efficiency 87 %

Peak intensity 7.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

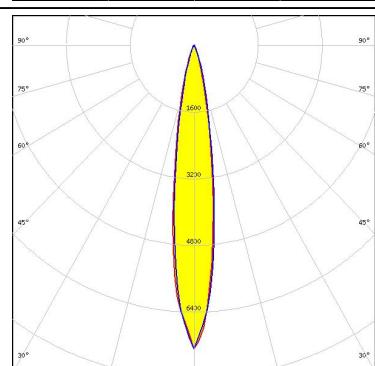

### OSRAM

Opto Semiconductors

LED SFH 4714A

FWHM / FWTM 12.0° / 24.0°


Efficiency 86 %

Peak intensity 13.7 cd/lm

LEDs/each optic 1

Light colour IR

Required components:

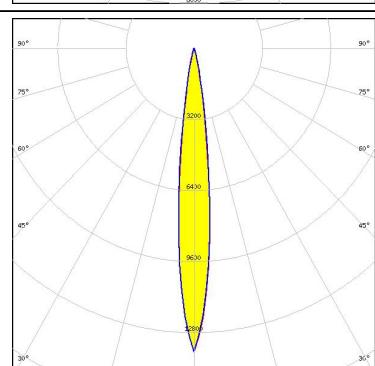

### PHOTOMETRIC DATA (SIMULATED):

#### OSRAM

Opto Semiconductors

LED SFH 4715AS


FWHM / FWTM 22.0° / 37.0°

Efficiency 86 %

LEDs/each optic 1

Light colour IR

Required components:

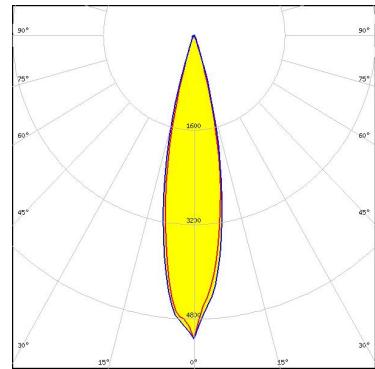

#### OSRAM

Opto Semiconductors

LED SFH 4716AS


FWHM / FWTM 17.0° / 31.0°

Efficiency 87 %

LEDs/each optic 1

Light colour IR

Required components:

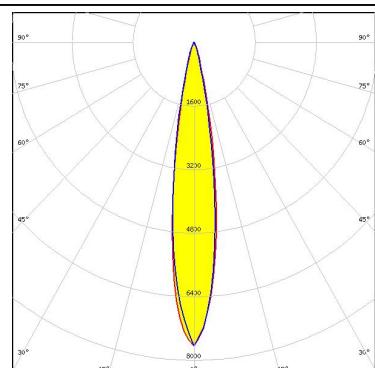

#### OSRAM

Opto Semiconductors

LED Synios P2720 1 mm

FWHM / FWTM 12.0° / 24.0°


Efficiency 88 %

Peak intensity 13.6 cd/lm

LEDs/each optic 1

Light colour Red

Required components:

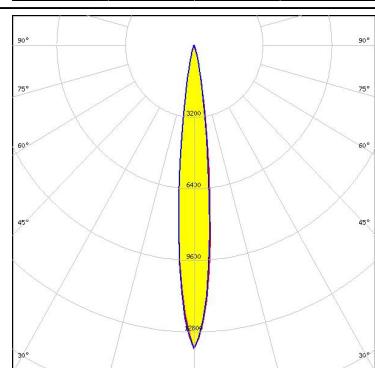

#### OSRAM

Opto Semiconductors

LED SYNIOIS S2222 (KW DDLM31)

FWHM / FWTM 16.0° / 34.0 + 32.0°


Efficiency 97 %

Peak intensity 8.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

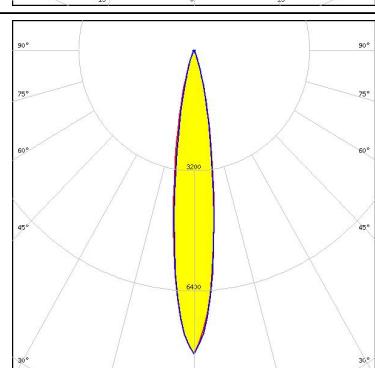


## PHOTOMETRIC DATA (SIMULATED):

### SAMSUNG

LED	LH351B
FWHM / FWTM	26.0° / 49.0°
Efficiency	88 %
Peak intensity	3.5 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

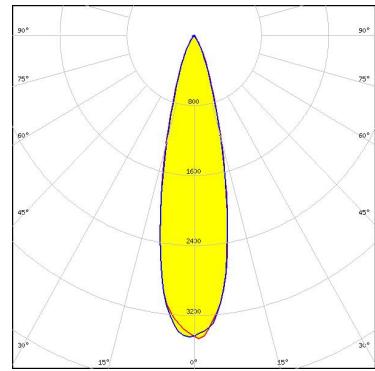

### SAMSUNG

LED	LH351D
FWHM / FWTM	34.0° / 66.0°
Efficiency	85 %
Peak intensity	1.9 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

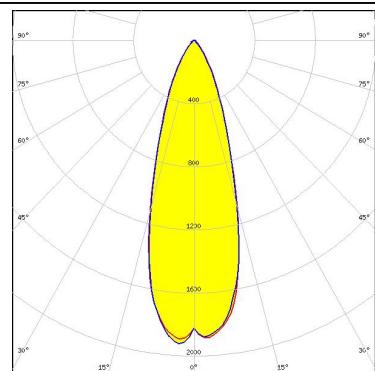

### SAMSUNG

LED	LM301A
FWHM / FWTM	14.5° / 33.0°
Efficiency	87 %
Peak intensity	7.1 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

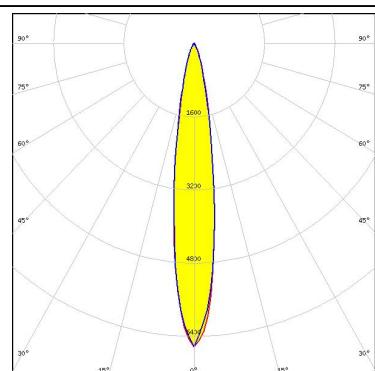





### SAMSUNG

LED	LM302A
FWHM / FWTM	16.0° / 40.0°
Efficiency	87 %
Peak intensity	5.3 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

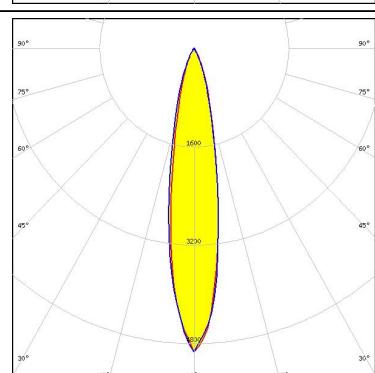



## PHOTOMETRIC DATA (SIMULATED):
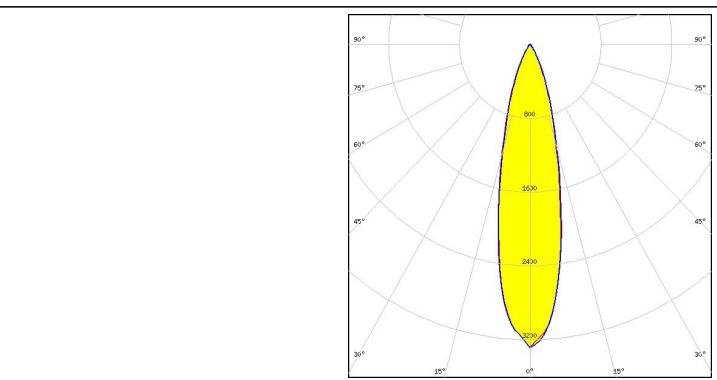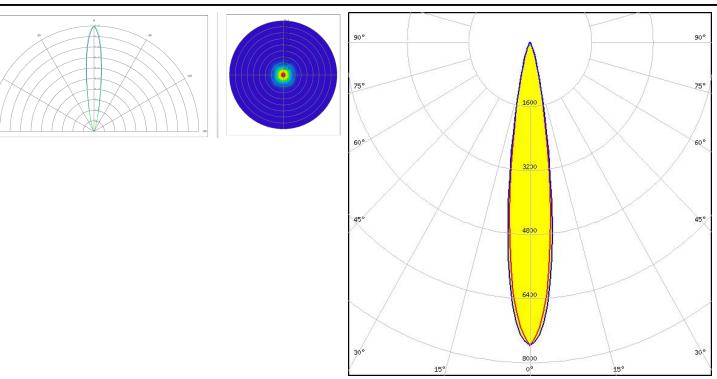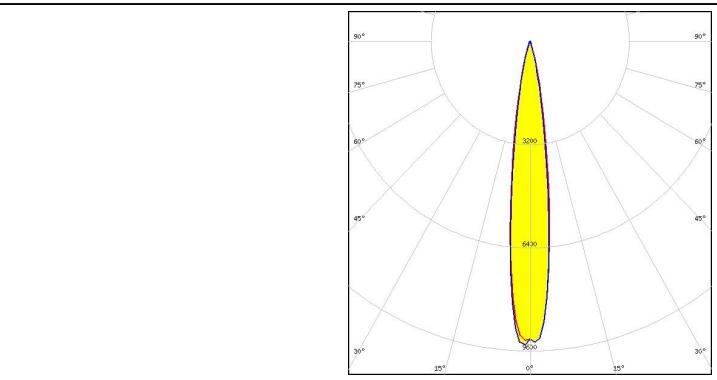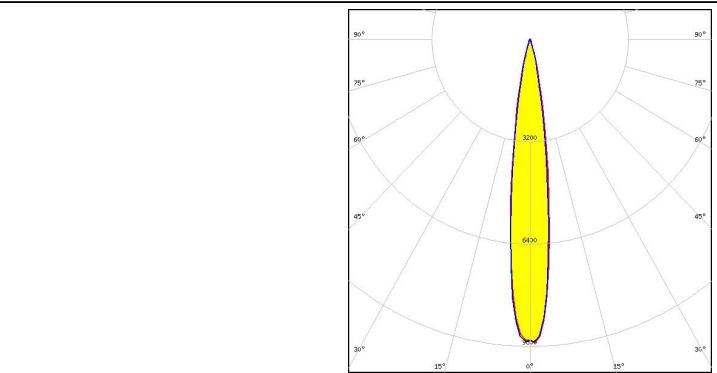
<p>SEoul SEMICONDUCTOR</p> <p>LED Z5M3</p> <p>FWHM / FWTM 24.0° / 51.0°</p> <p>Efficiency 86 %</p> <p>Peak intensity 3.3 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>STANLEY</b></p> <p>LED FWR1108MS</p> <p>FWHM / FWTM 16.0° / 32.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 7.6 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour IR</p> <p>Required components:</p>	
<p><b>STANLEY</b></p> <p>LED MFN1108MS</p> <p>FWHM / FWTM 16.0° / 30.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 9.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour IR</p> <p>Required components:</p>	
<p><b>STANLEY</b></p> <p>LED MGN1108MS</p> <p>FWHM / FWTM 14.0° / 29.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 9.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour IR</p> <p>Required components:</p>	

## PHOTOMETRIC DATA (SIMULATED):

**STANLEY**

LED MJN1108MS  
FWHM / FWTM 15.0° / 30.0°  
Efficiency 90 %  
LEDs/each optic 1  
Light colour IR  
Required components:

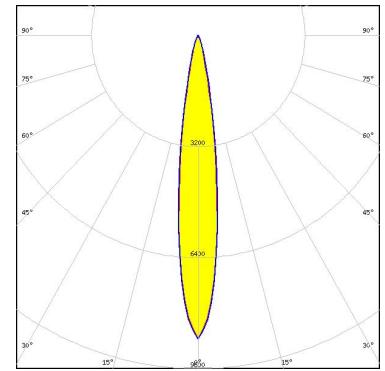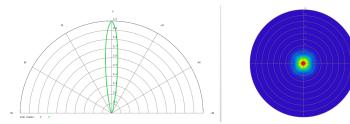

## GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

## MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

## PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

**LEDiL Oy**  
Joensuunkatu 13  
FI-24240 SALO  
Finland

**LEDiL Inc.**  
228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

**Ledil Optics Technology (Shenzhen) Co., Ltd.**  
# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

**Local sales and technical support**  
[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

**Shipping locations**  
Salo, Finland  
Hong Kong, China

**Distribution Partners**  
[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)