


OD6025 IP69K Series



DC Fan- 12V, 24V, 48V
60 x 25mm (2.4" x 1")

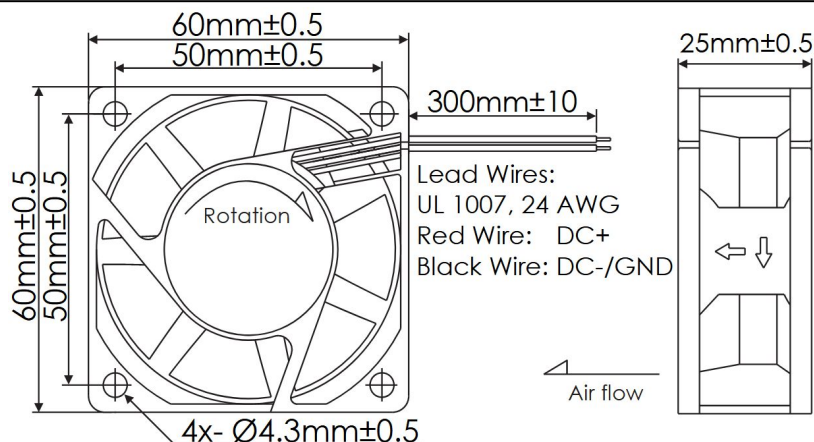

Frame	PBT, UL94 V-0 plastic	<u>Operating Temperature</u> -20°C ~ +65°C	STATIC PRESSURE ("H₂O) AIR FLOW (CFM)
Impeller	PBT, UL94 V-0 plastic	<u>Storage Temperature</u> -25°C ~ +70°C	
Connection	2x Lead wires, 24 AWG	<u>Life Expectancy</u> 60,000 Hours (L10 at 45°C)	
Motor	Brushless DC, Auto Restart, Polarity Protected, Electronically Protected, IP69K	<u>Available Options</u> Tachometer Output Alarm Output PWM Speed Control Input 5V DC Versions Salt Fog Ratings	
Bearing System	Dual Ball Bearings	Weight: 0.14 lbs	
Dielectric Strength	500VAC/min, < 1mA		
Insulation Resistance	≥10MΩ between lead wires and frame (500 VDC)		

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)	Rated Current (Amps)	Rated Speed (RPM)	Airflow (CFM)	Noise Level (dBA)	Max. Static Pressure ("H ₂ O)
OD6025-12HBIP69K	12	8 ~ 13.8	1.8	0.15	3975	25	30	0.22"
OD6025-24HBIP69K	24	15 ~ 26	2.8	0.12	3975	25	30	0.22"
OD6025-48HBIP69K	48	28 ~ 52	3.4	0.07	4050	28	30	0.23"