

- Supplementary and reinforced insulation
- I/O isolation 4000 VACrms rated for 300 Vrms working voltage
- 2 x MOOP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- Industrial safety to UL/IEC/EN 62368-1
- Wide 2:1 input voltage ranges
- Extended operating temperature range –40°C to 75°C max.
- Input filter meets EN55022, class A
- Continuous short-circuit protection
- High reliability
- 3-year product warranty



ES 60601-1 IEC 60601-1  
UL 62368-1 IEC 62368-1

The THB 10 series is a range of high performance DC/DC converter modules with double reinforced insulation system. It complies to latest medical safety standard IEC 60950-1 3rd edition for MOOP (Means of Operator Protection). The product comes in a 2"x1" industry standard package. All 12 models features wide 2:1 input voltage range and fully regulated output voltage. The converters offer an economical solution for demanding applications in industrial and medical instrumentation.

### Models

| Order Code  | Input Voltage Range          | Output 1 |                  | Output 2 |                  | Efficiency typ. |
|-------------|------------------------------|----------|------------------|----------|------------------|-----------------|
|             |                              | Vnom     | I <sub>max</sub> | Vnom     | I <sub>max</sub> |                 |
| THB 10-1211 | 9 - 18 VDC<br>(12 VDC nom.)  | 5.1 VDC  | 1'600 mA         |          |                  | 75 %            |
| THB 10-1212 |                              | 12 VDC   | 835 mA           |          |                  | 80 %            |
| THB 10-1222 |                              | +12 VDC  | 417 mA           | –12 VDC  | 417 mA           | 80 %            |
| THB 10-1223 |                              | +15 VDC  | 333 mA           | –15 VDC  | 333 mA           | 81 %            |
| THB 10-2411 | 18 - 36 VDC<br>(24 VDC nom.) | 5.1 VDC  | 2'000 mA         |          |                  | 76 %            |
| THB 10-2412 |                              | 12 VDC   | 835 mA           |          |                  | 81 %            |
| THB 10-2422 |                              | +12 VDC  | 417 mA           | –12 VDC  | 417 mA           | 81 %            |
| THB 10-2423 |                              | +15 VDC  | 333 mA           | –15 VDC  | 333 mA           | 82 %            |
| THB 10-4811 | 36 - 75 VDC<br>(48 VDC nom.) | 5.1 VDC  | 2'000 mA         |          |                  | 76 %            |
| THB 10-4812 |                              | 12 VDC   | 835 mA           |          |                  | 81 %            |
| THB 10-4822 |                              | +12 VDC  | 417 mA           | –12 VDC  | 417 mA           | 81 %            |
| THB 10-4823 |                              | +15 VDC  | 333 mA           | –15 VDC  | 333 mA           | 82 %            |

## Input Specifications

|                           |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Current             | - At no load   | 12 Vin models: 30 mA typ.<br>24 Vin models: 20 mA typ.<br>48 Vin models: 10 mA typ.                                                                                                                                                                                                                                                                                                                                                                                        |
|                           | - At full load | 12 Vin models: 905 mA typ. (5.1 Vout model)<br>1'040 mA typ. (12 Vout model)<br>1'040 mA typ. (12 / -12 Vout model)<br>1'040 mA typ. (15 / -15 Vout model)<br>24 Vin models: 560 mA typ. (5.1 Vout model)<br>515 mA typ. (12 Vout model)<br>515 mA typ. (12 / -12 Vout model)<br>515 mA typ. (15 / -15 Vout model)<br>48 Vin models: 280 mA typ. (5.1 Vout model)<br>255 mA typ. (12 Vout model)<br>255 mA typ. (12 / -12 Vout model)<br>255 mA typ. (15 / -15 Vout model) |
| Surge Voltage             |                | 12 Vin models: 25 VDC max. (1 s max.)<br>24 Vin models: 50 VDC max. (1 s max.)<br>48 Vin models: 100 VDC max. (1 s max.)                                                                                                                                                                                                                                                                                                                                                   |
| Start-up Voltage          |                | 12 Vin models: 7 VDC min. / 8 VDC typ. / 9 VDC max.<br>24 Vin models: 13 VDC min. / 15 VDC typ. / 18 VDC max.<br>48 Vin models: 30 VDC min. / 33 VDC typ. / 36 VDC max.                                                                                                                                                                                                                                                                                                    |
| Under Voltage Lockout     |                | 12 Vin models: 8.5 VDC max.<br>24 Vin models: 16 VDC max.<br>48 Vin models: 34 VDC max.                                                                                                                                                                                                                                                                                                                                                                                    |
| Reflected Ripple Current  |                | 12 Vin models: 100 mA typ.<br>24 Vin models: 50 mA typ.<br>48 Vin models: 25 mA typ.                                                                                                                                                                                                                                                                                                                                                                                       |
| Recommended Input Fuse    |                | 12 Vin models: 3'000 mA (slow blow)<br>24 Vin models: 1'500 mA (slow blow)<br>48 Vin models: 750 mA (slow blow)<br>(The need of an external fuse has to be assessed in the final application.)                                                                                                                                                                                                                                                                             |
| Input Filter              |                | Internal Pi-Type                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Short Circuit Input Power |                | 3 W max.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## Output Specifications

|                                        |                                 |                                                                                               |
|----------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------|
| Voltage Set Accuracy                   |                                 | ±1% max.                                                                                      |
| Regulation                             | - Input Variation (Vmin - Vmax) | single output models: 0.5% max.<br>dual output models: 0.5% max.                              |
|                                        | - Load Variation (15 - 100%)    | single output models: 1% max.<br>dual output models: 1% max. (Output 1)<br>1% max. (Output 2) |
| Ripple and Noise<br>(20 MHz Bandwidth) | - single output                 | 5.1 Vout models: 100 mVp-p max.<br>12 Vout models: 150 mVp-p max.                             |
|                                        | - dual output                   | 12 / -12 Vout models: 150 / 150 mVp-p max.<br>15 / -15 Vout models: 150 / 150 mVp-p max.      |
| Capacitive Load                        | - single output                 | 5.1 Vout models: 1'000 µF max.<br>12 Vout models: 470 µF max.                                 |
|                                        | - dual output                   | 12 / -12 Vout models: 220 / 220 µF max.<br>15 / -15 Vout models: 220 / 220 µF max.            |
| Minimum Load                           |                                 | Not required                                                                                  |
| Temperature Coefficient                |                                 | ±0.05 %/K max.                                                                                |
| Short Circuit Protection               |                                 | Continuous, Automatic recovery                                                                |
| Output Current Limitation              |                                 | 120% min. of Iout max.<br>150% typ. of Iout max.                                              |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

|                    |                      |                                                   |
|--------------------|----------------------|---------------------------------------------------|
| Transient Response | - Response Deviation | 3% typ. / 5% max. (75% to 100% Load Step)         |
|                    | - Response Time      | 300 µs typ. / 600 µs max. (75% to 100% Load Step) |

## Safety Specifications

|                       |                             |                                                                                                                                                             |
|-----------------------|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety Standards      | - IT / Multimedia Equipment | CSA-C22.2, No. 60950-1<br>EN 60950-1<br>EN 62368-1<br>IEC 60950-1<br>IEC 62368-1<br>UL 60950-1<br>UL 62368-1                                                |
|                       | - Medical Equipment         | EN 60601-1<br>IEC 60601-1<br>ANSI/AAMI ES 60601-1<br>CSA-C22.2, No 60601-1<br>2 x MOOP (Means Of Operator Protection)<br>MOPP (Means Of Patient Protection) |
|                       | - Certification Documents   | <a href="http://www.tracopower.com/overview/thb10">www.tracopower.com/overview/thb10</a>                                                                    |
|                       | Pollution Degree            | PD 3                                                                                                                                                        |
| Over Voltage Category |                             | Not mains connected                                                                                                                                         |

## EMC Specifications

|               |                                                    |                                                                                                                                                               |
|---------------|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMI Emissions | - Conducted Emissions                              | EN 60601-1-2 edition 4 (Medical Devices)<br>EN 55011 class A (with external filter)                                                                           |
|               | - Radiated Emissions                               | EN 55011 class A (with external filter)<br>External filter proposal: <a href="http://www.tracopower.com/overview/thb10">www.tracopower.com/overview/thb10</a> |
| EMS Immunity  | - Electrostatic Discharge                          | EN 60601-1-2 edition 4 (Medical Devices)<br>Air: EN 61000-4-2, ±15 kV, perf. criteria A<br>Contact: EN 61000-4-2, ±8 kV, perf. criteria A                     |
|               | - RF Electromagnetic Field                         | EN 61000-4-3, 10 V/m, perf. criteria A                                                                                                                        |
|               | - EFT (Burst) / Surge                              | EN 61000-4-4, ±2 kV, perf. criteria A<br>EN 61000-4-5, ±1 kV, perf. criteria A                                                                                |
|               | - Conducted RF Disturbances<br>- PF Magnetic Field | Ext. input component: 330 µF / 35 V (12 Vin models)<br>330 µF / 50 V (24 Vin models)<br>330 µF / 100 V (48 Vin models)                                        |
|               |                                                    | EN 61000-4-6, 10 Vrms, perf. criteria A                                                                                                                       |
|               |                                                    | Continuous: EN 61000-4-8, 30 A/m, perf. criteria A                                                                                                            |

## General Specifications

|                           |                                 |                                            |
|---------------------------|---------------------------------|--------------------------------------------|
| Relative Humidity         |                                 | 95% max. (non condensing)                  |
| Temperature Ranges        | - Operating Temperature         | -40°C to +75°C                             |
|                           | - Case Temperature              | +95°C max.                                 |
|                           | - Storage Temperature           | -50°C to +125°C                            |
| Power Derating            | - High Temperature              | 2.85 %/K above 60°C                        |
| Cooling System            |                                 | Natural convection (20 LFM)                |
| Altitude During Operation |                                 | 5'000 m max.                               |
| Switching Frequency       |                                 | 120 - 180 kHz (PWM)                        |
|                           |                                 | 150 kHz typ. (PWM)                         |
| Insulation System         |                                 | Reinforced Insulation                      |
| Working Voltage (rated)   |                                 | 300 VAC (acc. to IEC/EN 60601-1)           |
|                           |                                 | 1000 VAC (acc. to IEC/EN 62368-1, 60950-1) |
| Isolation Test Voltage    | - Input to Output, 60 s         | 4'200 VAC                                  |
| Isolation Resistance      | - Input to Output, 500 VDC      | 10'000 MΩ min.                             |
| Isolation Capacitance     | - Input to Output, 100 kHz, 1 V | 60 pF typ.                                 |
|                           |                                 | 80 pF max.                                 |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.


|                          |                         |                                                                                                                                                                                                                                                                                                         |
|--------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Leakage Current          | - Earth Leakage Current | 10 $\mu$ A max.                                                                                                                                                                                                                                                                                         |
| Reliability              | - Calculated MTBF       | 1'000'000 h (MIL-HDBK-217F, ground benign)                                                                                                                                                                                                                                                              |
| Washing Process          | See Cleaning Guideline: | Allowed (hermetical product)                                                                                                                                                                                                                                                                            |
|                          |                         | <a href="http://www.tracopower.com/info/cleaning.pdf">www.tracopower.com/info/cleaning.pdf</a>                                                                                                                                                                                                          |
| Housing Material         |                         | Non-conductive Plastic (UL 94 V-0 rated)                                                                                                                                                                                                                                                                |
| Potting Material         |                         | Silicone (UL 94 V-0 rated)                                                                                                                                                                                                                                                                              |
| Pin Material             |                         | Copper Alloy (C6801)                                                                                                                                                                                                                                                                                    |
| Pin Foundation Plating   |                         | Nickel (2.5 $\mu$ m min.)                                                                                                                                                                                                                                                                               |
| Pin Surface Plating      |                         | Gold (75 - 125 nm), glossy                                                                                                                                                                                                                                                                              |
| Housing Type             |                         | Plastic Case                                                                                                                                                                                                                                                                                            |
| Mounting Type            |                         | PCB Mount                                                                                                                                                                                                                                                                                               |
| Connection Type          |                         | THD (Through-Hole Device)                                                                                                                                                                                                                                                                               |
| Footprint Type           |                         | 2" x 1"                                                                                                                                                                                                                                                                                                 |
| Soldering Profile        |                         | Wave Soldering<br>260°C / 10 s max.                                                                                                                                                                                                                                                                     |
| Weight                   |                         | 24.5 g                                                                                                                                                                                                                                                                                                  |
| Environmental Compliance | - REACH Declaration     | <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a><br>REACH SVHC list compliant<br>REACH Annex XVII compliant                                                                                                                             |
|                          | - RoHS Declaration      | <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a><br>Exemptions: 7a<br>(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).<br>The SCIP number is provided on request.) |

### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/thb10](http://www.tracopower.com/overview/thb10)

### Outline Dimensions

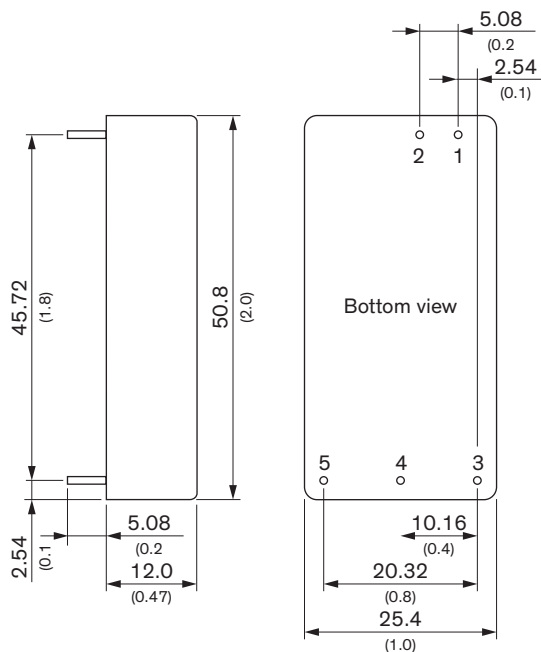

| Pinout |            |            |
|--------|------------|------------|
| Pin    | Single     | Dual       |
| 1      | +Vin (Vcc) | +Vin (Vcc) |
| 2      | -Vin (GND) | -Vin (GND) |
| 3      | +Vout      | +Vout      |
| 4      | No pin     | Common     |
| 5      | -Vout      | -Vout      |