

Sealing insert

WJ-DM xx/ASI/z

Sealing insert

TPE TPS

Properties

Temperature range


- for especially moulded AS-i (Actuator-Sensor-Interface) Bus-cable

-30 °C

+100 °C

Comment

assembled in PERFECT series: 50.6xx M/ASI/z, 50.6xx PAzzzzASlz

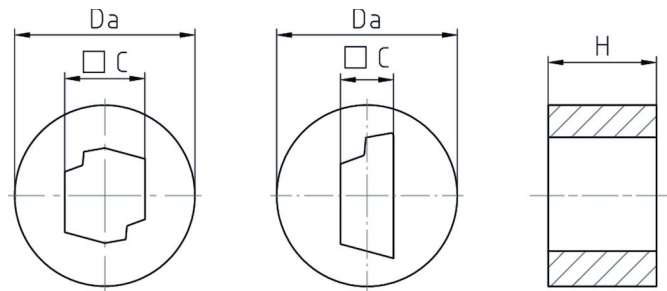

Features

1xAS-i Bus-cable cable cross section left

Size	ØC	H	Da	 VPE	Part No.
M20	1x AS-i Bus-Leitung	9	15	50	WJ-DM 20/ASI/1
M25	1x AS-i Bus-Leitung	9,3	19,8	50	WJ-DM 25/ASI/1

2x AS-i Bus cable cable cross section twofold

Size	ØC	H	Da	 VPE	Part No.
M20	2x AS-i Bus-Leitung	9	15	50	WJ-DM 20/ASI/2*
M25	2x AS-i Bus-Leitung	9,3	19,8	50	WJ-DM 25/ASI/2

*Sealing insert Ethylene-Propylene rubber EPDM