

RoHS Compliant Pb - Lead Free	Ltr	Revisions	Date	Appr

### Electrical Specifications:

Frequency Range		6.000 to 133.000	MHz
Mode of Oscillation	Fundamental	6.000 to 50.000	MHz
	Third Overtone	40.000 to 133.000	
Frequency Tolerance at 25°C	Standard	±30	PPM Max
	Optional	±25	
		±20	
		±15	
		±10	
Frequency Stability over Temperature Range	Standard	±50	PPM Max
	Optional	±30	
		±25	
		±20	
		±15	
		±10*	
Operating Temperature Range	Standard	-20 to +70	° C
	Extended	-40 to +85	
Storage Temperature Range		-55 to +125	
Aging		±3	PPM Max/Year
Load Capacitance		10 to 32 and Series Resonance	pF
Shunt Capacitance		7.0	
Equivalent Series Resistance (ESR)		See ESR Table	Ohms
Drive Level		100	uW Typ
Insulation Resistance		500 at 100 Vdc ± 15 Vdc	M Ohms

### Frequency Range and ESR Values:

Frequency Range in MHz	ESR Ohm Max	Mode of Operation	Frequency Range in MHz	ESR Ohm Max	Mode of Operation
6.000 to 7.999	70	Fundamental	40.000 to 79.999	70	3rd Overtone
8.000 to 9.999	40	Fundamental	80.000 to 133.000	60	3rd Overtone
10.000 to 14.999	35	Fundamental			
15.000 to 39.999	30	Fundamental			
40.000 to 50.000	20	Fundamental			



11-3 Chien-Kuo Rd T.E.P.Z. 4027 Taiwan, ROC

All dimensions are millimeters.

CAD: TCR

Review: EG

Appr: JL


Page: 1/4 Date: Dec 1, 2018

### Specification Title:

**Microprocessor Crystal Unit  
Low Profile  
7.0 x 5.0 millimeter Surface Mount - 4 Pad  
General Product Specification**


Part Number: **C7S Series**

**Mechanical Outline:**

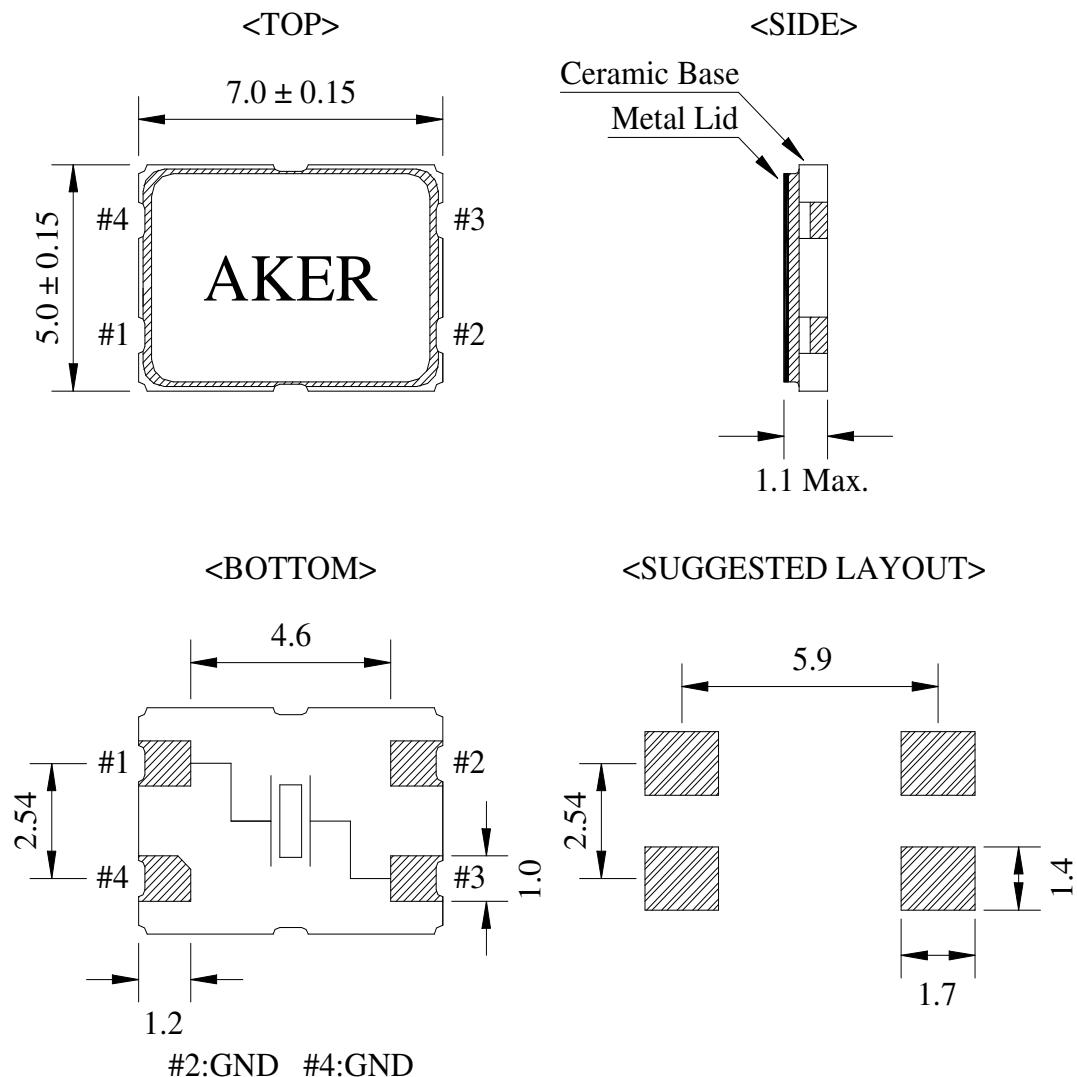


**Package is Seam Sealed Ceramic-Metal.  
Dimensions are millimeters.**

### Carrier Tape Dimensions:

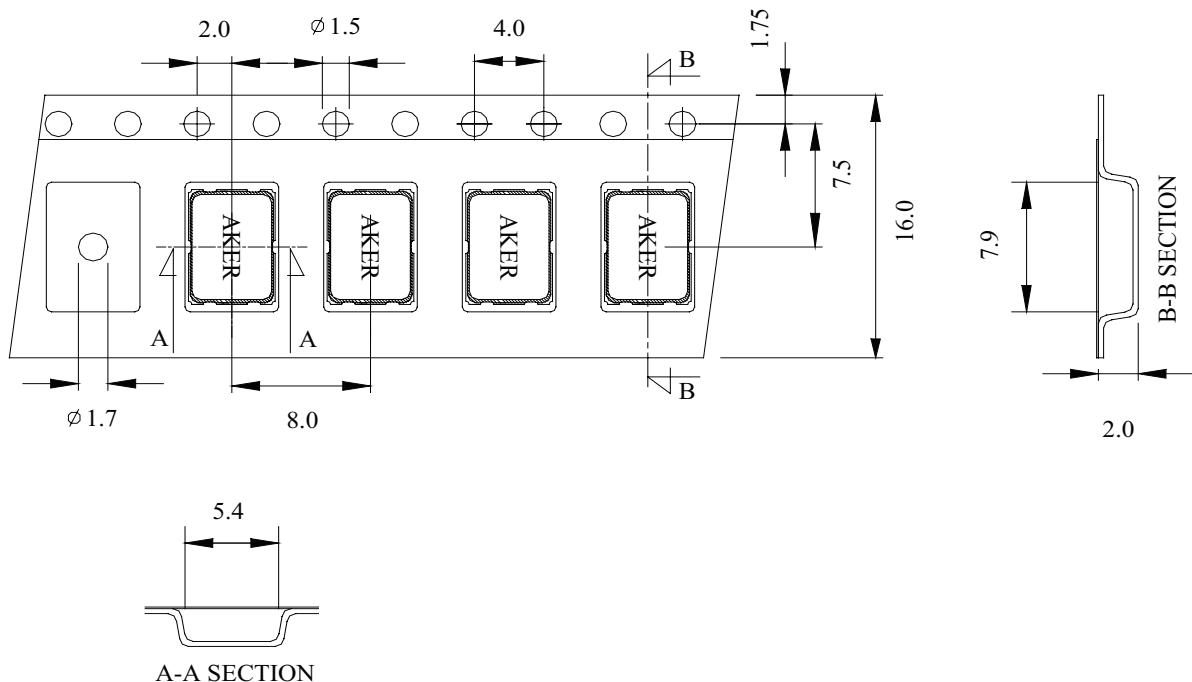

Dimensions are millimeters.

### Solder Reflow Characteristics:

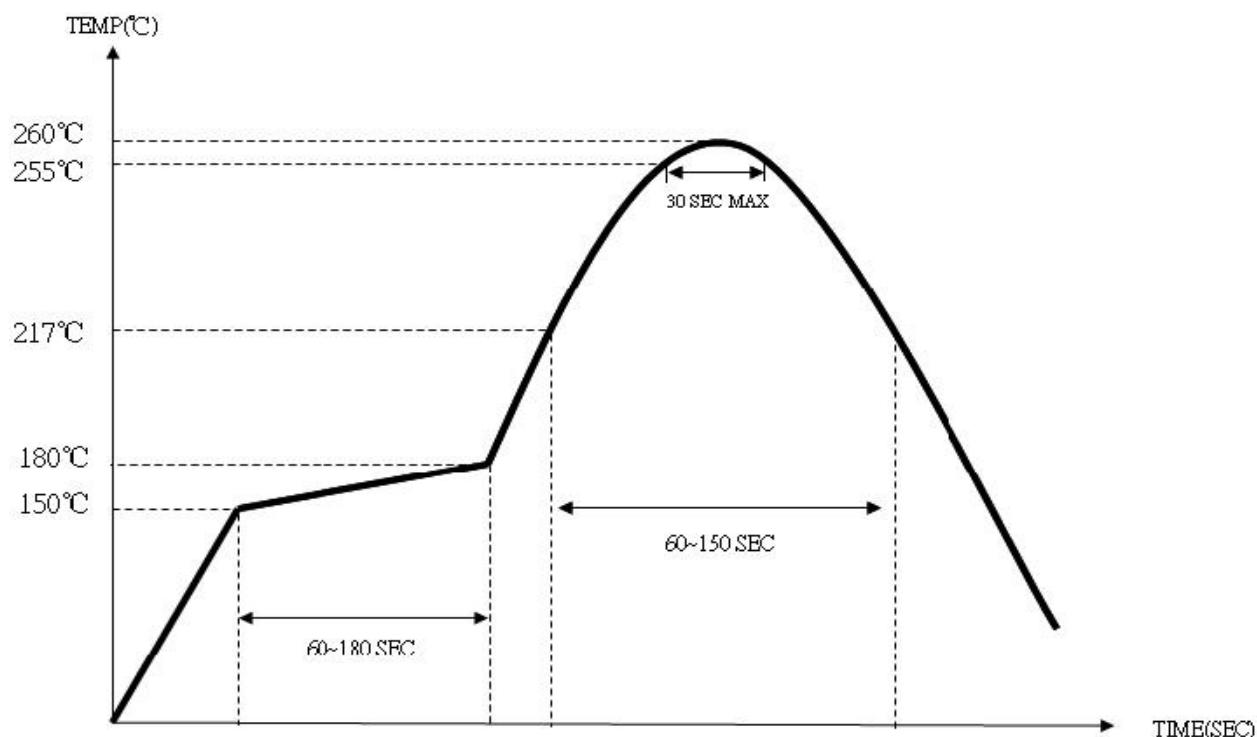

## How to build a Part Number:

Series		C	Parameter
Package		7S	5.0 x 7.0 mm 4 Pad
		-	
Frequency		6.000 to 133.000	MHz
		-	
Load Capacitance	10	10 pF	
	12	12 pF	
	16	16 pF	
	18	18 pF	
	20	20 pF	
	32	32 pF	
	S	Series	
	-	-	
Frequency Tolerance	Standard	30	±30 PPM
	Option	25	±25 PPM
		20	±20 PPM
		15	±15 PPM
		10	±10 PPM
Frequency Stability	Standard	50	±50 PPM
	Option	30	±30 PPM
		25	±25 PPM
		20	±20 PPM
		15	±15 PPM
		10	±10 PPM*
	-	-	
Mode of Oscillation	See Notes		Fundamental
	3		Third Overtone
	-	-	
Temperature Range	Standard	See Notes	-20 to +70 °C
	Option	X	-40 to +85 °C
	-	-	
Packaging	M	250pcs Reel	
	R	1000pcs Reel	

### Part Number Example:

C7S-64.000-18-3050-3-R

C7S- 5 x 7 mm SMD Seam Seal Package - 4 pad

64.000 MHz Nominal Frequency

18 pF Load Capacitance

3050: ±30 PPM Frequency Tolerance and ±50 PPM Frequency Stability

Third Overtone Mode

-10 to +70° C Temperature Range

R: Tape and Reel Packaging - 1000pcs Reel

### Notes:

1- Fundamental mode does not need to be included in Part Number description.

\* ±10 PPM Temperature Stability is only available from -30 to +85° C.

2- Standard Temperature Range does not need to be included in Part Number description.

3- Product is shipped in Tape and Reel configuration

4- Quantities less than 250pcs are shipped in tape only.