


REVISIONS


REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	11/10/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPX4LLK-SAF3GT-6IN (6 INCHES)
CB1.37-IPX4LLK-SAF3GT-10IN (10 INCHES)

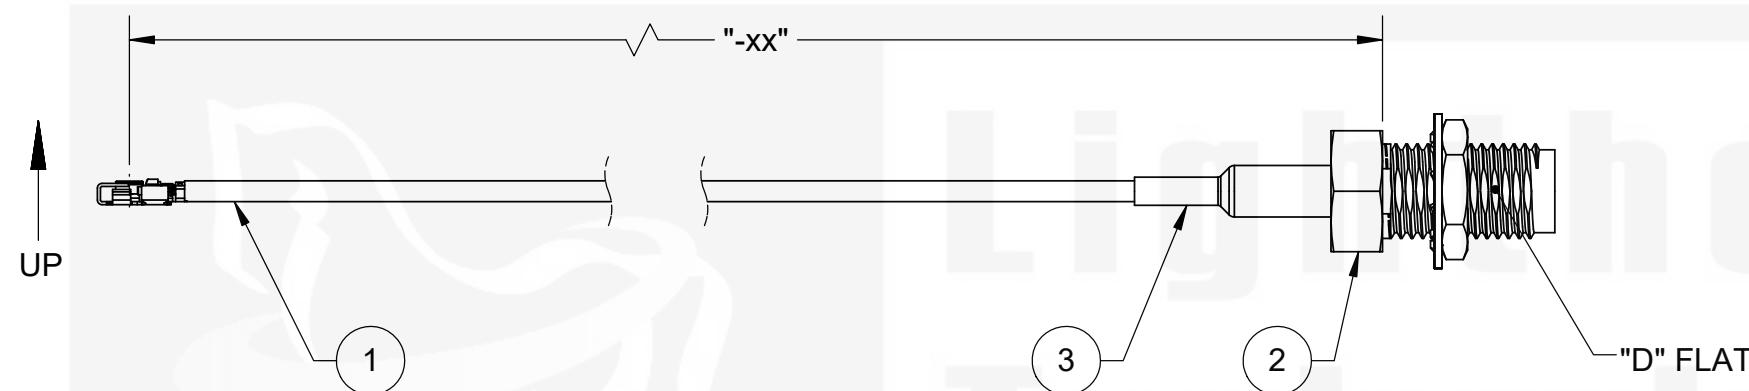

ITEM	PART NUMBER	DESCRIPTION	QTY
1	IPX4LLK-137	IPX4L (MHF4L), LOCKING, 1.13MM COAX	1
2	SASF13RGT-316	SMA, JACK, BLKHD, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

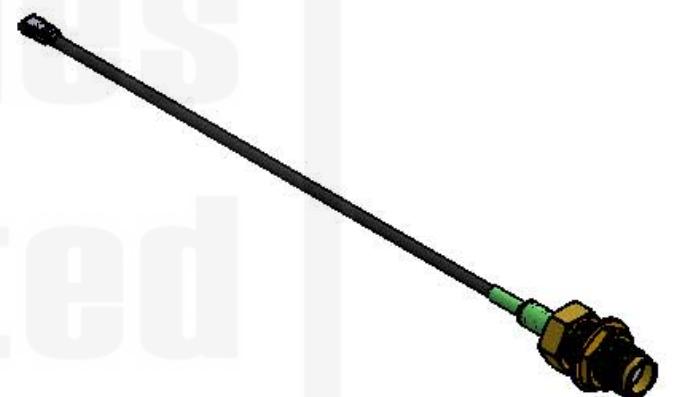

SCALE: NONE

IPX® AND MHF® ARE REGISTRED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
DIMENSIONS ARE IN MILLIMETERS	
X	= ±0.5
X.X	= ±0.25
X.XX	= ±0.13
ANGLE	= ±30°
THIRD ANGLE PROJECTION	
CUSTOMER APPROVAL	
SIGN / DATE:	
ENG APPR.	
CHECKED	
DRAWN	P. BURDGE
	11-10-2020
NAME	DATE

Lighthorse Technologies

San Diego, CA
WWW.RFCOMMOTOR.COM

TITLE: CABLE ASSEMBLY, I-PEX LOCKING,
(MHF4L) R/A JACK, CRIMP TO SMA, JACK,
REAR BULKHEAD MNT, 1.37MM COAX

SIZE	PART/DWG. NO:	REV
B	CB1.37-IPX4LLK-SAF3GT-xxIN	1
SCALE: 2:1	FILE NAME	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHHOUSE TECHNOLOGIES INFORMATION, REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHHOUSE TECHNOLOGIES. LIGHHOUSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHHOUSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

