

MODEL 702 – INCREMENTAL SHAFT ENCODER



Ø2.0"

FEATURES

Standard Size 20 Package (2x2)

Flange and Servo Mounting

Up to 30,000 CPR

80 lb Maximum Axial and Radial Shaft Loading

IP67 Sealing Available

The Model 702 Size 20 Accu-Coder™ is a heavy duty, extremely rugged, reliable, yet compact industry standard 2" diameter encoder, designed for harsh factory and plant floor environments. The double shielded ball bearings are rated at 80 lb maximum axial and radial shaft loading to ensure a long operating life. Made to withstand the harsh effects of the real world, both the flange and servo models are rated IP67 with the optional heavy duty shaft seal. With a variety of mounting options in both the flange and servo models, the Model 702 is ideal for both new applications and replacements. If you need an encoder that won't let you down, the Model 702 is it.

COMMON APPLICATIONS

Motion Control Feedback, Conveyors, Elevator Controls, Machine Control, Food Processing, Process Control, Robotics, Material Handling, Textile Machines

MODEL 702 ORDERING GUIDE

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

702	20	S	1000	R	HV	1	F	1	E	X	N	CE	
MODEL	OPERATING TEMPERATURE			OUTPUT TYPE			SEALING		CONNECTOR LOCATION		MATING CONNECTOR		CERTIFICATION
702 Size 20 (2.0")	S 0° to 70° C L -40° to 70° C ³ H 0° to 100° C ⁴			5 - 28V In/Out ⁶ OC Open Collector PU Pull-Up Resistor PP Push-Pull HV Line Driver ⁷ 8 - 28V In/5V Out ^{8,9} H5 Line Driver ⁷ P5 Push-Pull			N No Seal 1 IP66 2 IP64 5 IP67		E End S Side		N No Y Yes		N None CE CE Marked ¹³
SHAFT SIZE ¹		CYCLES PER REVOLUTION		MAXIMUM FREQUENCY			MOUNTING		CONNECTOR TYPE ¹¹				
07 1/4", 0.250" 20 3/8", 0.375" 21 10 mm 30 3/8", 0.375" ² 24 1/4", 0.250" No Flat		1-30,000 See CPR Options below for available resolutions. Price adder for CPR >1270					Flange Mounts F 1.181" Female Pilot L 0.687" Male Pilot G 1.250" Male Pilot K Size 25 w/30 Shaft Servo Mounts S w/1.181" Female Pilot U S w/0.687" Male Pilot T S w/1.250" Male Pilot C w/1.181" Female Pilot E C w/0.687" Male Pilot D C w/1.250" Male Pilot P w/1.181" Female Pilot Q P w/0.687" Male Pilot R P w/1.250" Male Pilot J Size 25 w/30 Shaft		W 6-pin MS ⁷ Y 7-pin MS ⁷ X 10-pin MS 9D 9-pin D-subminiature J 5-pin M12 (12 mm) ⁷ K 8-pin M12 (12 mm) Standard Wiring Z 8-pin M12 (12 mm) Optional Wiring G Gland, 24" Cable ¹² H 10-pin Bayonet				
		NUMBER OF CHANNELS ⁵											
		A Channel A Channel A Leads B Q Quadrature A & B R Quadrature A & B with Index Channel B Leads A K Reverse Quadrature A & B D Reverse Quadrature A & B with Index											

MODEL 702 CPR OPTIONS

0001*	0002*	0004*	0005*	0006*	0007*	0008*	0010*	0011*
0012*	0014*	0020	0021*	0024*	0025*	0028*	0030*	0032*
0033*	0034*	0035*	0038*	0040*	0042*	0045*	0050*	0060
0064*	0100	0120	0125	0128*	0144*	0150*	0160*	0192*
0200	0240*	0250	0254*	0256*	0300	0333*	0336	0360
0400	0500	0512	0600	0625*	0635	0665*	0720	0768*
0800	0889	1000	1024	1200	1204*a	1250 ^a	1270 ^a	1440
1500	1800	2000	2048	2400 ^a	2500	2540 ^a	2880 ^a	3000 ^a
3600 ^a	4000 ^a	4096 ^a	5000 ^a	6000 ^a	7200 ^a	7500 ^a	9000 ^a	10,000 ^a
10,240 ^a	12,000 ^a	12,500 ^a	14,400 ^a	15,000 ^a	18,000 ^a	20,000 ^a	20,480 ^a	
25,000 ^a	30,000 ^a							

*Contact Customer Service for High Temperature Option.

^aHigh Temperature Option (H) limited to 85° C maximum for these CPR options.


New CPR values are periodically added to those listed. Contact Customer Service to determine all currently available CPR values. Special disk resolutions are available upon request. A one-time NRE fee may apply.

NOTES:


- 1 Contact Customer Service for additional options.
- 2 Shaft with Size 25 Mounting Adapter, J or K mounting only.
- 3 Low temperature option not available with resolutions of 3000 CPR or higher.
- 4 0° to 85° C for certain resolutions, see CPR Options.
- 5 Contact Customer Service for non-standard index gating options.
- 6 24 VDC max for high temperature option.
- 7 Line Driver not available with 5-pin M12 or 6-pin MS connector. Available with 7-pin MS connector only without Index Z.
- 8 Standard temperature, 60 to 3000 CPR only. Not available with 2540 CPR.
- 9 H5 and P5 outputs are not available with CE option, or any End Mount MS Connector.
- 10 Standard cable lengths only. For details, please refer to Technical Bulletin [TB116: Noise and Signal Distortion Considerations](#) at encoder.com.
- 11 For mating connectors, cables, and cordsets see [Accessories](#) at encoder.com. For Connector Pin Configuration Diagrams, see Technical Information or see [Connector Pin Configuration Diagrams](#) at encoder.com.
- 12 For non-standard cable lengths, add a forward slash (/) plus cable length expressed in feet. Example: G/6 = 6 feet of cable.
- 13 Please refer to Technical Bulletin [TB100: When to Choose the CE Mark](#) at encoder.com.

MODEL 702 – INCREMENTAL SHAFT ENCODER


MODEL 702 2.0" FLANGE MOUNT (F)

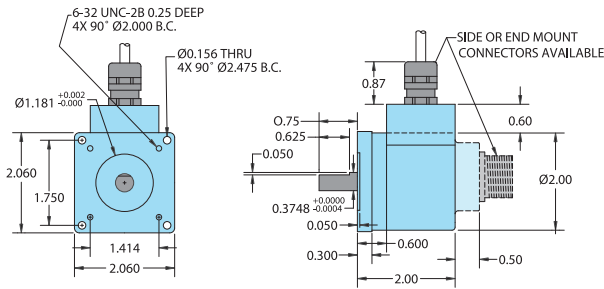

MODEL 702 WITH 2.5" FLANGE MOUNT (K)

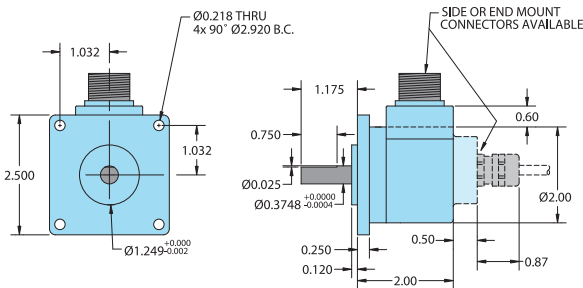

MODEL 702 WITH 2.5" SERVO MOUNT (J)

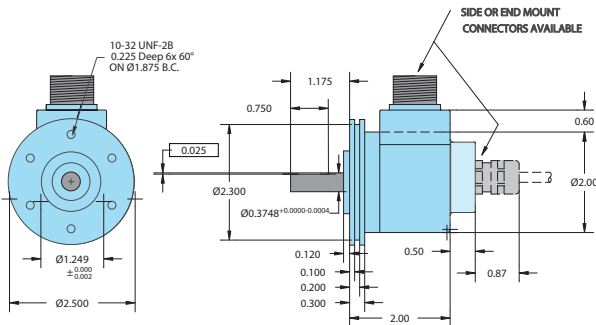

All dimensions are in inches with a tolerance of ± 0.005 " or ± 0.01 " unless otherwise specified.

WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable.

Trim back and insulate unused wires.

Function	Gland Cable† Wire Color	5-pin M12**	8-pin M12** Standard Wiring	8-pin M12** Optional Wiring	10-Pin MS	7-pin MS HV,H5	7-pin MS PU,PP, OC,P5	6-pin MS PU,PP OC,P5	9-pin D-sub	10-pin Bayonet
Com	Black	3	7	1	F	F	F	A,F	9	F
+VDC	Red	1	2	2	D	D	D	B	1	D
A	White	4	1	3	A	A	A	D	2	A
A'	Brown	—	3	4	H	C	—	—	3	H
B	Blue	2	4	5	B	B	B	E	4	B
B'	Violet	—	5	6	I	E	—	—	5	J
Z	Orange	5	6	7	C	—	C	C	6	C
Z'	Yellow	—	8	8	J	—	—	—	7	K
Case	Green	—	—	—	G	G	G	—	8	G
Shield	Bare*	—	—	—	—	—	—	—	—	—


*CE Option: Cable shield (bare wire) is connected to internal case.

†Standard cable is 24 AWG conductors with foil and braid shield.

**CE option: Use cable cordset with shield connected to M12 connector coupling nut.

WAVEFORM DIAGRAMS


Line Driver and Push-Pull

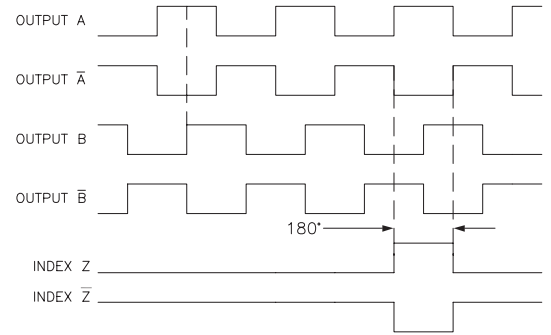

CLOCKWISE ROTATION AS VIEWED FROM THE MOUNTING FACE

NOTE: ALL DEGREE REFERENCES ARE ELECTRICAL DEGREES. WAVEFORM SHOWN WITH OPTIONAL COMPLEMENTARY SIGNALS A, B, Z FOR HV AND H5 OUTPUTS ONLY.

Open Collector and Pull-Up

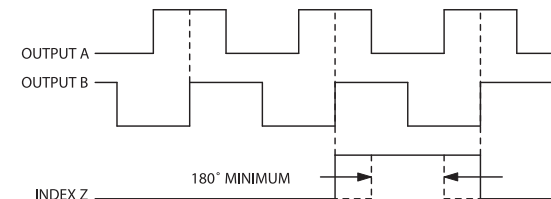

CLOCKWISE ROTATION AS VIEWED FROM THE MOUNTING FACE

NOTE: ALL DEGREE REFERENCES ARE ELECTRICAL DEGREES. INDEX IS POSITIVE GOING.