

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI26P-16T40-C-1X

 Rev. 0-2020
 RoHS3 & REACH
 IP67 Front Face
 Piezoelectric Indicators


Operating Characteristics


ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	8 to 16 VDC
Max Current at Vmax	60 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	400 ± 100 Hz
Min SPL at Vrated	95 dB
Test Conditions	10 cm

Typical Output Sound Level ± 4 dB(A), with Type 2 Meter

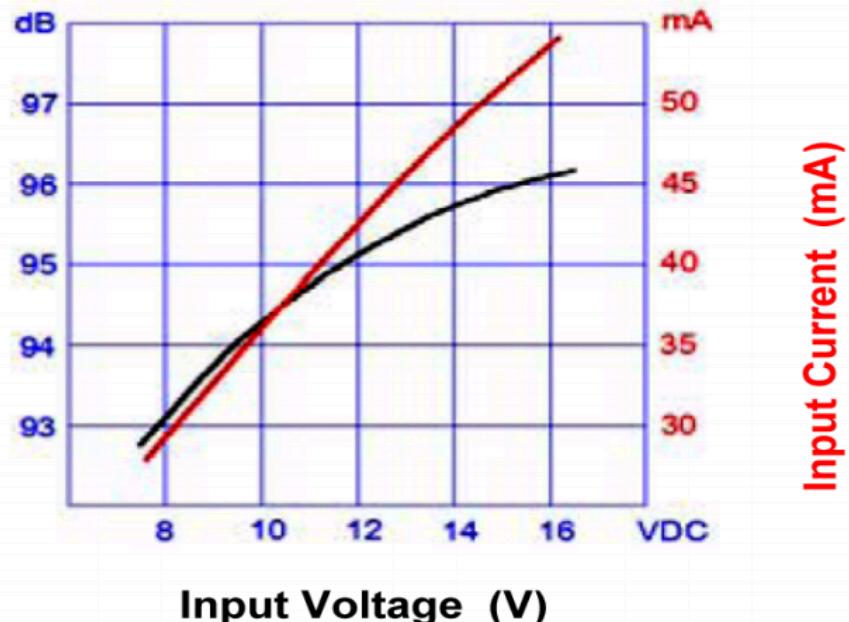

Physical Characteristics


MATERIALS

Housing	Black Noryl
Diaphragm	Nickel Alloy
PC Pin	Tin Plated Brass

TEMPERATURE RANGES

Operating	-40 to +105 °C
Storage	-40 to +105 °C

Weight	7.5 g
--------	-------

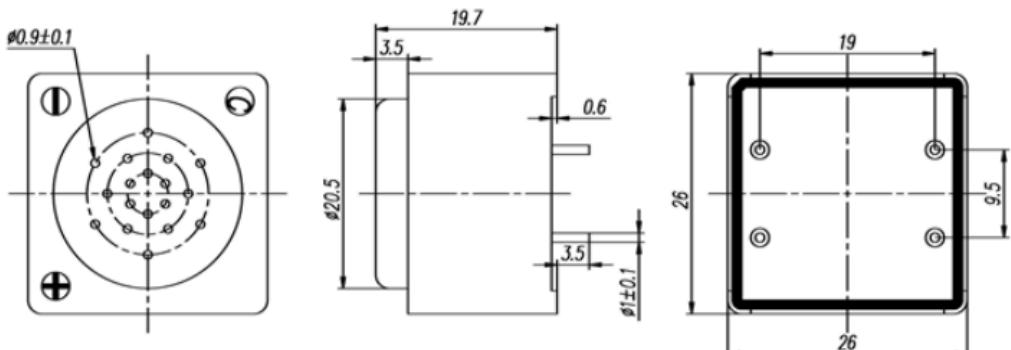

Units in mm. Unless specified, tolerance +/- 0.5mm

Revision	Description	By	Date
0-2020	Original Specification	SP	2020-06-16

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
 ©2020 Challenge Electronics, Inc. Pub. 20200625162029