


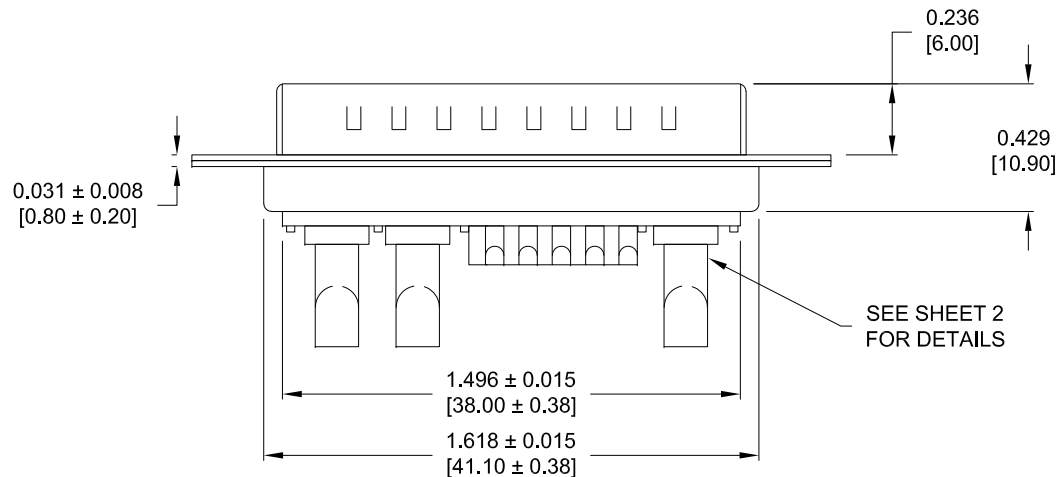

680M13W3103L YY1

1 = GOLD FLASH _____
*CONTACT NORCOMP FOR MORE OPTIONS

DO NOT SCALE FROM DRAWING

NorComp


REV
3

680M13W3103LYY1


HARDWARE OPTIONS

CLINCH NUTS HAVE #4-40 INTERNAL THREADS THRU


0 NO HARDWARE




1 0.098" SOLDER SIDE

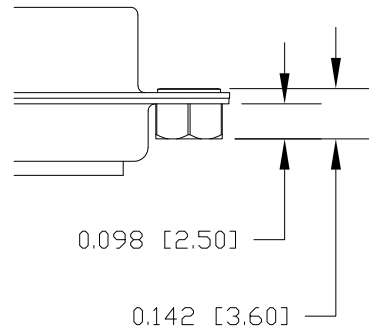


2 0.236" SOLDER SIDE

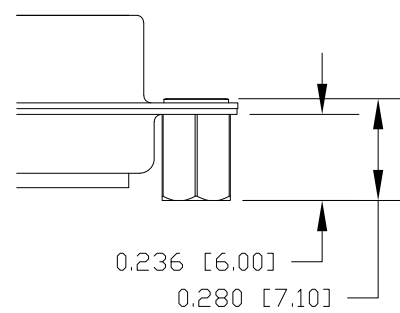


3 0.236" MATING SIDE

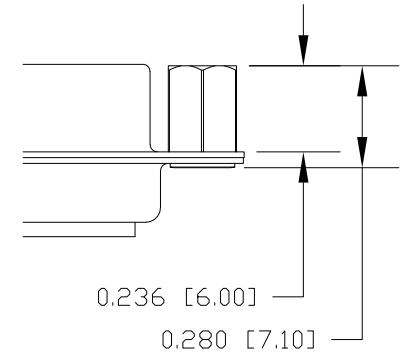


NOTE:
SIGNAL AND POWER CONTACTS
COME PRE-LOADED INTO INSULATORS

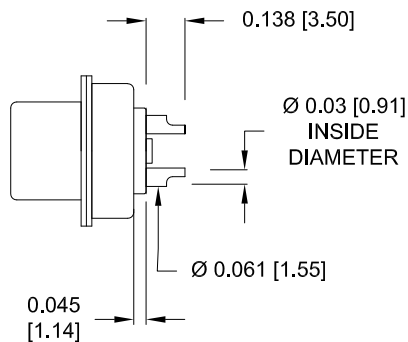

SIGNAL CONTACTS
ACCEPTS UP TO 20 AWG WIRE

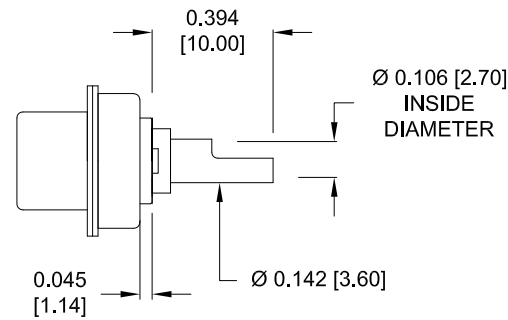

20 AMP POWER CONTACTS
ACCEPTS UP TO 12 AWG WIRE

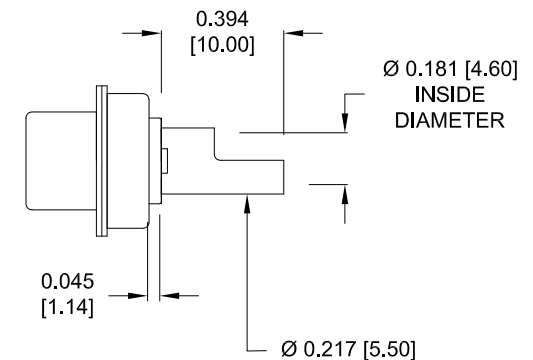

40 AMP POWER CONTACTS
ACCEPTS UP TO 8 AWG WIRE

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
P. JENKINS

DATE:
08/22/2011

NorComp

SCALE:
NTS

DWG NO.

SHEET 2 OF 2

REV 3

680M13W3103LYY1