

**pui**  
**audio**™ inc  
a projects unlimited company

## SMT-0825-S-2-R 8.5 x 8.5mm Transducer




3541 Stop Eight Road • Dayton, Ohio 45414

### Product Overview


- Side-firing electromechanical transducer designed for 2.5 to 4.5 Vp-p
- Small 8.5 x 8.5mm footprint and 4mm height for thin, modern devices
- 87 dBA minimum output (3.6Vp-p @ 10 cm) and 2.5kHz resonant frequency
- Designed for reflow soldering using a lead-free profile

Frequency Response (3.6 Vp-p @ 0.1 meters)

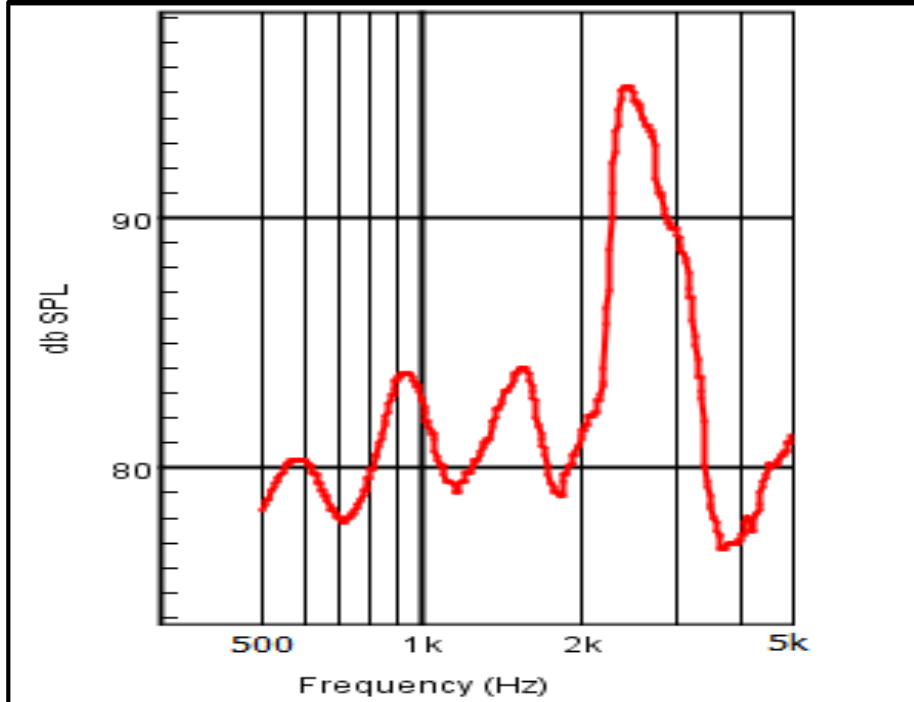

RoHS Compliant



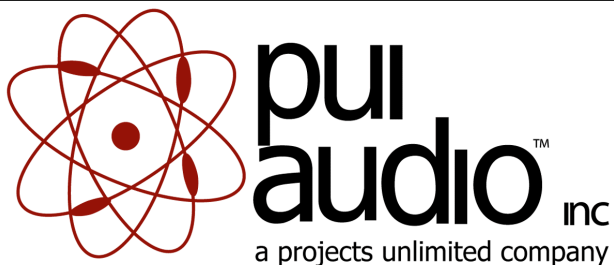

# SMT-0825-S-2-R

## 8.5 x 8.5mm


### Transducer

#### Mechanical and Environment Testing


Test Description	Test Condition
High Temperature	85°C (±2°C) with random humidity for 96 hours
Low Temperature	-40°C (±2°C) with random humidity for 96 hours
Humidity	25°C to 60°C with 90% to 95% relative humidity for 12 hours, 10 cycles
Vibration	1.53 mm movement modulated at 10-55 Hz in 3 directions for 6 hours
Drop Test	120 cm free fall in six directions, 3 cycles
Temperature Cycle Test	-30°C to 70°C, five 90 minute cycles

After testing, part shall rest for two hours and then be tested for a clean, pure tone.

#### Recommended Reflow Profile

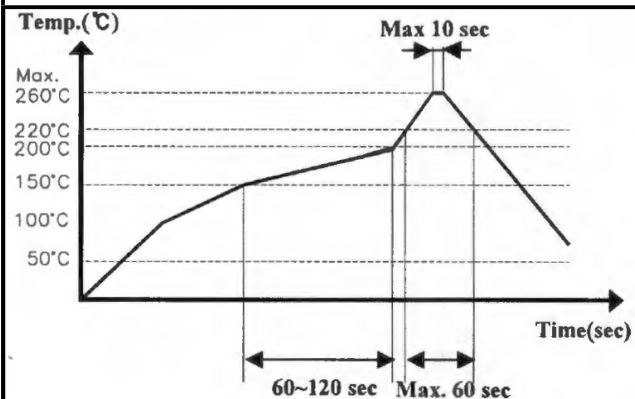

#### Tape Dimensions

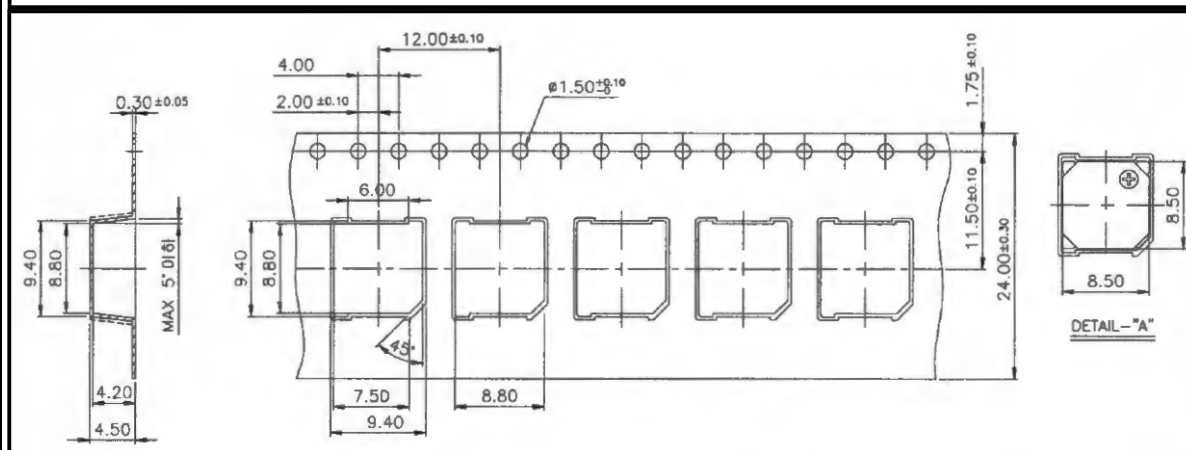

#### Recommended Land Pattern

