


AI-1223-TWT-5V-R 12mm Indicator

3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview

- 12mm diameter, 3-7 VDC self-drive indicator
- 85 dBA minimum output (5 VDC @ 10 cm) and 2,300 Hz continuous tone
- PBT housing withstands Wave soldering temperatures
- Removable wash tag preserves performance

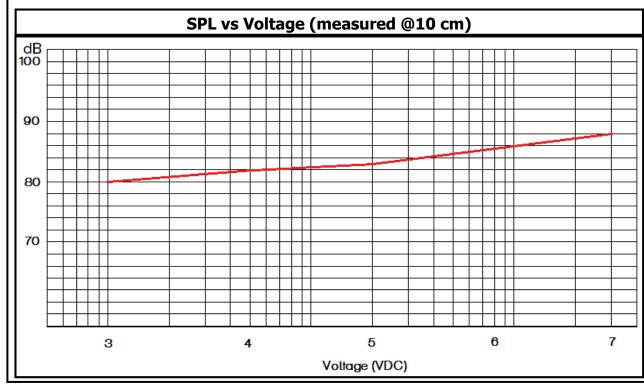














AI-1223-TWT-5V-R 12mm Indicator

Mechanical and Environment Testing			
Test Description	Test Condition		
High Temperature	85°C (±2°C) with random humidity for 96 hours		
Low Temperature	-25°C (±2°C) with random humidity for 96 hours		
Humidity	40°C (±2°C) with 90% to 95% relative humidity for 96 hours		
Vibration	0.75 mm movement modulated at 10-55 Hz for 3 hours		
Drop Test	100 cm free fall onto wood board, 10 cycles		
Temperature Cycle Test	-30°C to 80°C, 100 cycles		



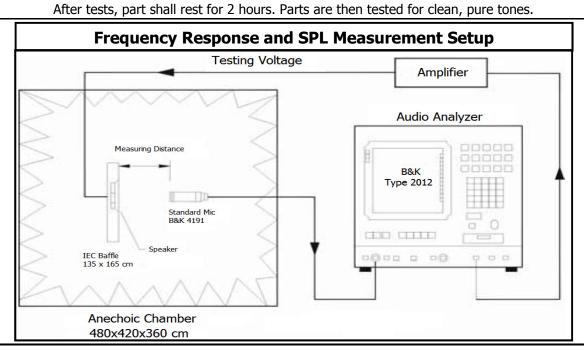





SPECIFICATIONS					
PARAMETERS	VALUES	UNITS			
RATED VOLTAGE	5	Vdc			
OPERATING VOLTAGE RANGE	3~7	Vdc			
RATED CURRENT (MAX)	30	mA			
MINIMUM SPL @ 10 CM	85	dBA			
RESONANT FREQUENCY	2,300 ± 300	Hz			
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec			
OPERATING TEMPERATURE	-40 ~ +85	°C			
STORAGE TEMPERATURE	-40 ~ +85	°C			
HOUSING MATERIAL	PBT	-			
TERMINAL MATERIAL	Sn PLATED	-			
	RED COPPER				
WEIGHT	2	grams			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003,	Projects	Unlimited	Inc.

REVISION HISTORY					
LTR	DESCRIPTION	DATE	APPROVED		
-	RELEASED FROM ENGINEERING	6/10/2004			
Α	REMOVED LEAD FREE ADDED RoHS NOTE	8/11/2005	B.R.		
В	REVISED DIMENSION SIZE AND STYLE	11/28/2005	B.R.		
С	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	10/8/2007	B.R.		
D	REVISED OPERATING AND STORAGE TEMPERATURES	12/1/2011	B.R.		
Е	REVISED HOUSING MATERIAL	9/25/2012	B.R.		

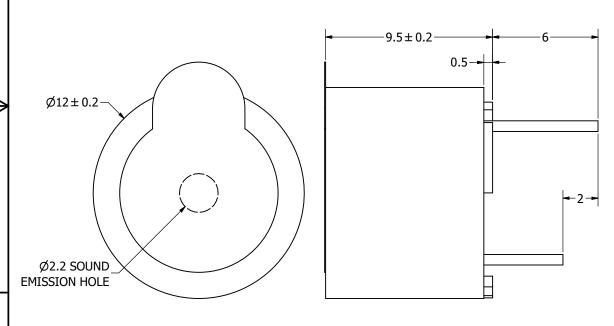

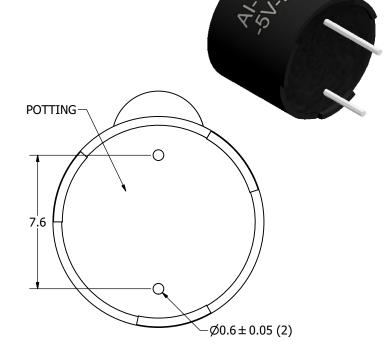

Drawn Date 10/8/2007

1/1

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE		Designed by	Date	Checked by	Date	Approved by	Date	Dr	awr
SPECIFIED: DIMENSIONS ARE IN	SIZE	R.A.C.	6/9/2004			R.W.	6/9/2004	10	/8/
MILLIMETERS, TOLERANCES ARE ±0.5 AND	Α3	pul.			AI-1223-TWT-5V-R				
ANGLES ARE ±3°.	, (שלו ולוכ	TM .	T., al:		Edit	ion	
AI-1223-TWT-5V-R.idw		TX T	addic	inc	Inaid	cator	-	.	1