

#### PRODUCT FEATURES

- Variable shield heights of 0.25" (6.35mm), 0.50" (12.7mm) or 0.75" (19.05mm)
- Quick & easy shielding solution; Shields are ready to order; no tooling needed
- Brass material with tin plating offer excellent shielding and solderability characteristics
- No pre-set through-pins to interfere with custom boards
- Easy form-by-hand bend lines assist creating formed shield --No tooling required!

#### MATERIAL SPECS

- 0.015" (0.381mm) brass CDA 26000 ½ hard
- Finish: Bright tin plate (per Mil-T-10727, Type I Bright)
- Dimensions are outside (formed) dimensions
- Fotofab standard shields are RoHS compliant
- Made in the USA with materials produced in the USA

#### PRODUCT NOTES

- Parts are designed to be formed by hand without the use of tools.
- To create a wall height of 0.50" or 0.25" simply break away each 0.25" section by bending wall back and forth at the bend line
- Create 90° bend by forming shield wall into the lid so that bend line remains on the inside of shield



Information furnished by Fotofab is believed to be accurate and reliable. However, no responsibility is assumed by Fotofab for its use, nor any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice.

Fotofab  
3758 Belmont Ave  
Chicago, IL 60618

p. 773-463-6211  
f. 773-463-33787  
[www.fotofab.com](http://www.fotofab.com)

© 2006 Fotofab / All rights reserved.




### Prototype Kit: Standard Size Shields

Prototype Kit, Standard					
Dimensions: in (mm)					
Quantity per kit	A		B		C
2	0.500	(12.70)	0.500	(12.70)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.500	(12.70)	0.750	(19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.500	(12.70)	1.000	(25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.750	(19.05)	0.750	(19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.750	(19.05)	1.125	(28.58)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.750	(19.05)	1.500	(38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.000	(25.40)	1.000	(25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.000	(25.40)	1.500	(38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.000	(25.40)	2.000	(50.80)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	1.500	(38.10)	1.500	(38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	1.500	(38.10)	2.250	(57.15)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	1.500	(38.10)	3.000	(76.20)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	2.000	(50.80)	2.000	(50.80)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	2.000	(50.80)	3.000	(76.20)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	2.000	(50.80)	4.000	(101.60)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	2.500	(63.50)	2.500	(63.50)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	2.500	(63.50)	3.750	(95.25)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
1	2.500	(63.50)	5.000	(127.00)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)

Kit includes 29 shields total

For more information, visit [www.fotofab.com](http://www.fotofab.com)

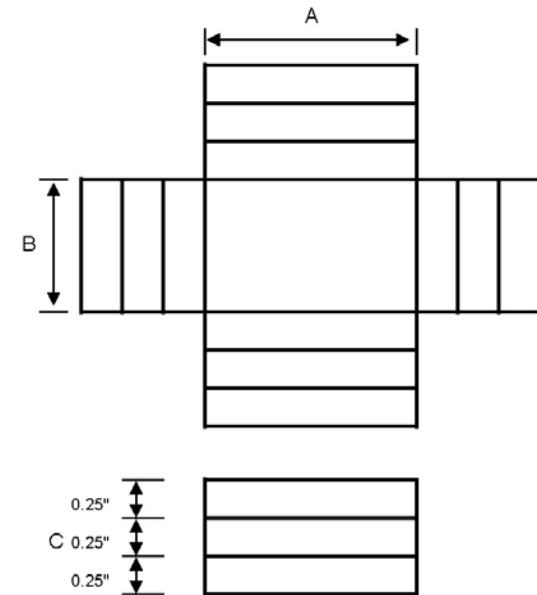

Each 0.025" section can be easily broken away to create shield heights of 0.25", 0.50" or 0.75"

Information furnished by Fotofab is believed to be accurate and reliable. However, no responsibility is assumed by Fotofab for its use, nor any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice.


Fotofab p. 773-463-6211  
 3758 Belmont Ave f. 773-463-33787  
 Chicago, IL 60618 [www.fotofab.com](http://www.fotofab.com)

© 2006 Fotofab / All rights reserved.



### Prototype Kit: Small Size Shields

Prototype Kit, Small			
Dimensions: in (mm)			
Quantity per kit	A	B	C
3	0.500 (12.70)	0.500 (12.70)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
3	0.500 (12.70)	0.750 (19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
3	0.500 (12.70)	1.000 (25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.750 (19.05)	0.750 (19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
3	0.750 (19.05)	1.125 (28.58)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.750 (19.05)	1.500 (38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.000 (25.40)	1.000 (25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.000 (25.40)	1.500 (38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.500 (38.10)	3.000 (76.20)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	1.000 (25.40)	1.333 (33.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.600 (15.24)	0.900 (22.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.400 (10.16)	0.400 (10.16)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.600 (15.24)	0.600 (15.24)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.500 (12.70)	1.333 (33.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.750 (19.05)	1.333 (33.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)

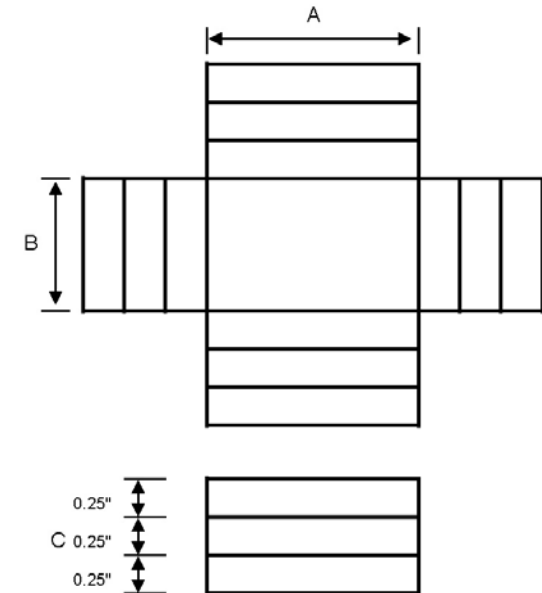

Each 0.025" section can be easily broken away to create shield heights of 0.25", 0.50" or 0.75"

Kit includes 46 shields total  
 For more information, visit [www.fotofab.com](http://www.fotofab.com)

Information furnished by Fotofab is believed to be accurate and reliable. However, no responsibility is assumed by Fotofab for its use, nor any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice.

Fotofab p. 773-463-6211  
 3758 Belmont Ave f. 773-463-33787  
 Chicago, IL 60618 [www.fotofab.com](http://www.fotofab.com)

© 2006 Fotofab / All rights reserved.

