

## STRADELLA-IP-28-T3

IESNA Type III (medium) beam for roads that are equal to or wider than mounting height. Variant made from PMMA.

### TECHNICAL SPECIFICATIONS:

Dimensions	100.0 x 100.0 mm
Height	9.2 mm
Fastening	pin, screw
Ingress protection classes	IP67
ROHS compliant	yes ⓘ




### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADELLA-IP-28-T3	Multi-lens	PMMA	clear	
STRADELLA-28-SEAL	Seal	Silicone	white	

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CS16102_STRADELLA-IP-28-T3 » Box size: 476 x 273 x 247 mm	156	78	78	6.3

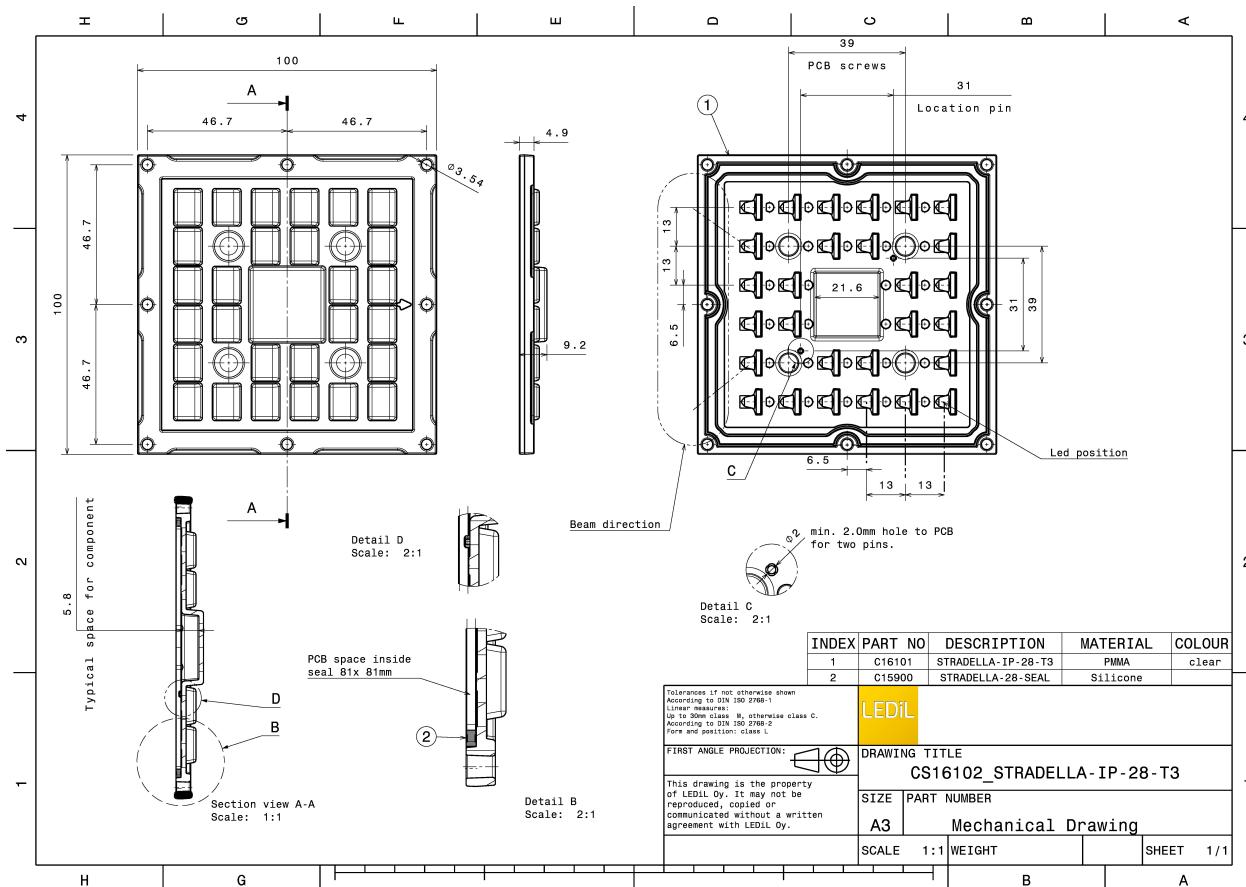


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


### PHOTOMETRIC DATA (MEASURED):




**LED** HiQLED STR28 CR JE2835 4x7 xxx  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.9 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

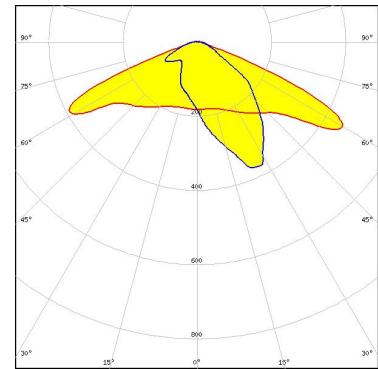


**LED** HiQLED STR28 CR JDš3030 4x7 xxx  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 1 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

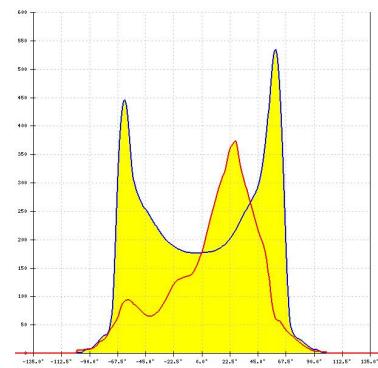

**LED** QUICK FLUX STR28 XD2x14 xxx G8  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.7 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

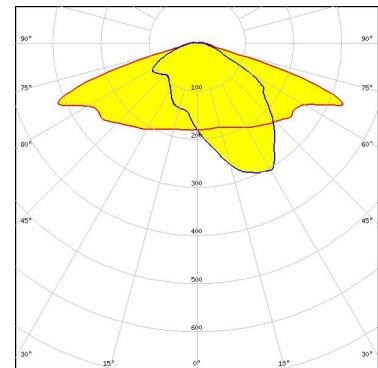

**LED** QUICK FLUX STR28 XP2x14 xxx G7  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

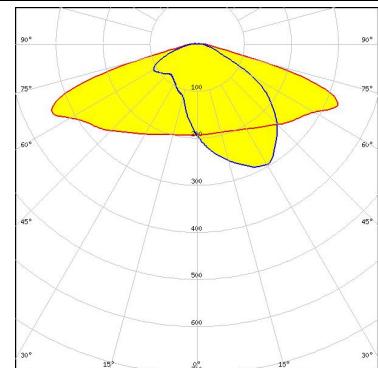

### PHOTOMETRIC DATA (MEASURED):



LED QUICK FLUX STR28 XT2x14 xxx G5

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

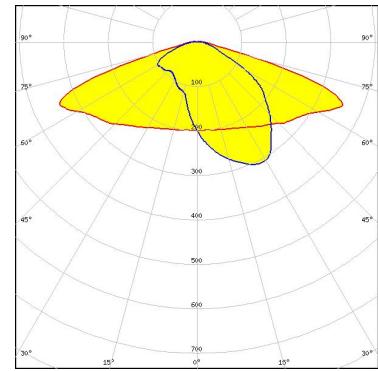

LED J Series 2835

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.9 cd/lm

LEDs/each optic 1

Light colour White

Required components:

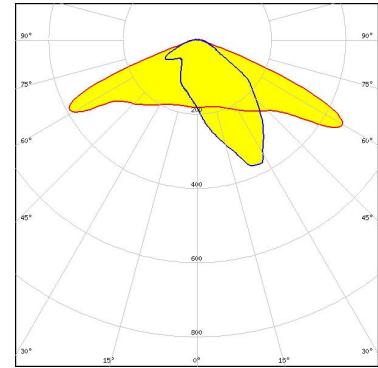

LED J Series 3030

FWHM / FWTM Asymmetric


Efficiency 96 %

Peak intensity 0.7 cd/lm

LEDs/each optic 1

Light colour White

Required components:

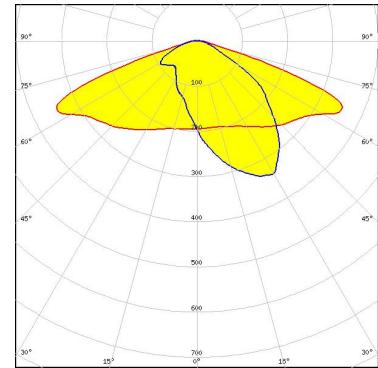

LED J Series 3030

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 1 cd/lm

LEDs/each optic 1

Light colour White


Required components:

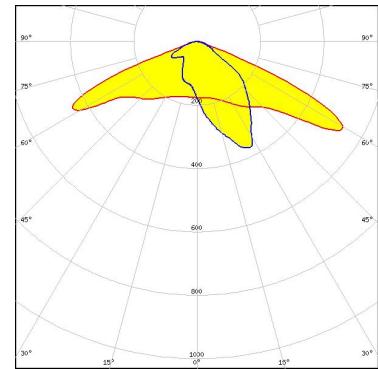


### PHOTOMETRIC DATA (MEASURED):




**LED** XD16  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.7 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

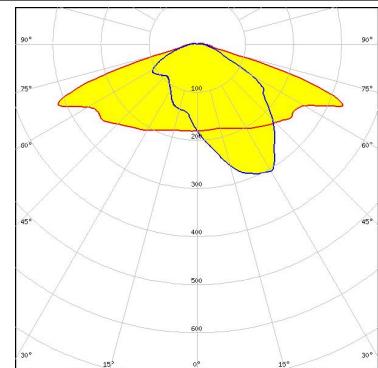


**LED** XP-G3  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

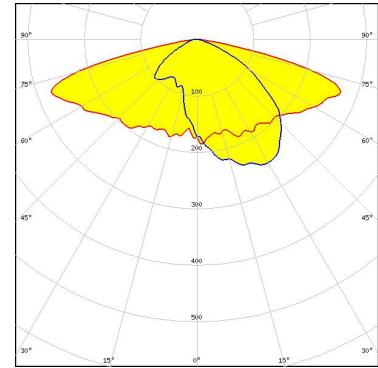

**LED** XT-E  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

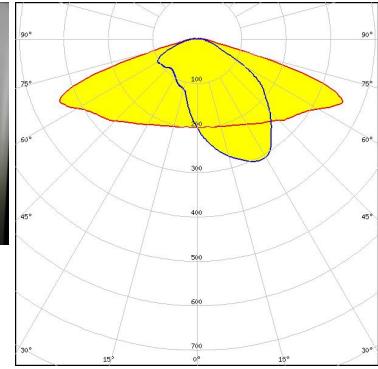


**LED** LUXEON 3030 2D (Round LES)  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.8 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

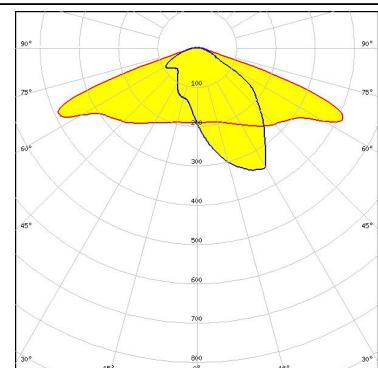


### PHOTOMETRIC DATA (MEASURED):




**LED** NF2W585AR  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

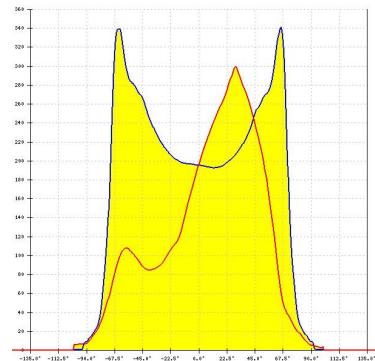


**LED** NF2W585AR  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

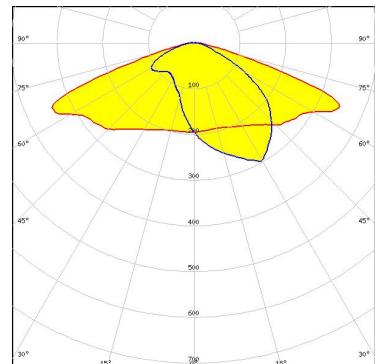

**LED** NF2x757G  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

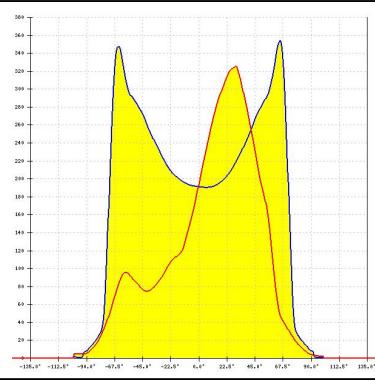

**LED** NVSW219F  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

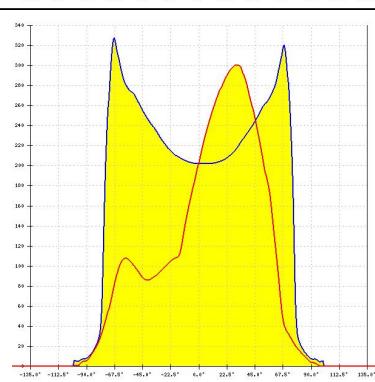

### PHOTOMETRIC DATA (MEASURED):


#### OSRAM

Opto Semiconductors

LED Duris S5 (2 chip)  
FWHM / FWTM Asymmetric

Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White

Required components:

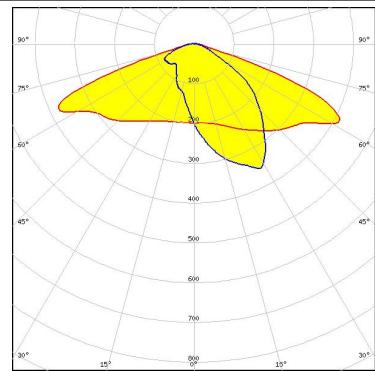


#### OSRAM

Opto Semiconductors

LED OSCONIQ S 3030  
FWHM / FWTM Asymmetric

Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White

Required components:

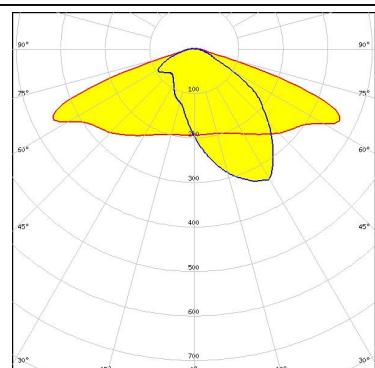


#### OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric

Efficiency 95 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White

Required components:

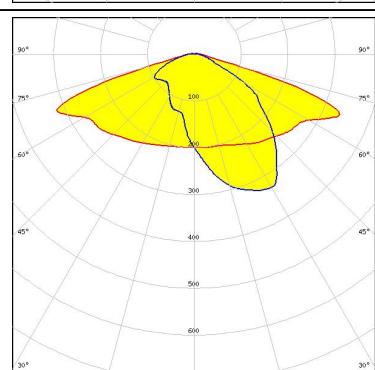


#### SAMSUNG

LED HiLOM SC28 (LH181B)  
FWHM / FWTM Asymmetric

Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White

Required components:

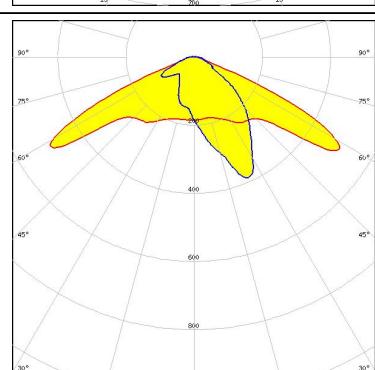

### PHOTOMETRIC DATA (MEASURED):

#### SAMSUNG

LED HiLOM SM28 (LM301B)

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.9 cd/lm

LEDs/each optic 1

Light colour White

Required components:

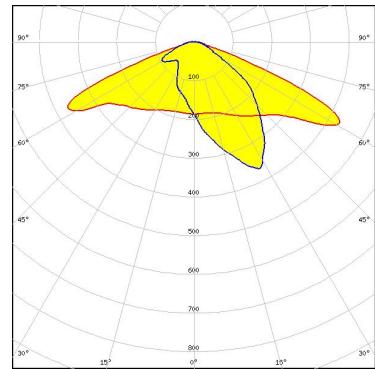

#### SEOUL SEMICONDUCTOR

LED Z5M3

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White


Required components:

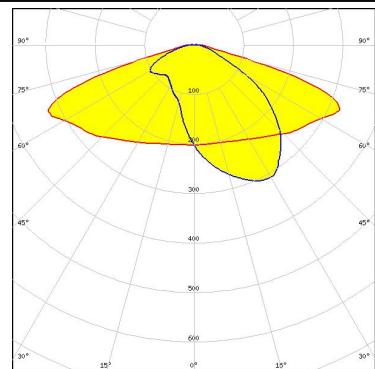


### PHOTOMETRIC DATA (SIMULATED):




LED	XP-E2
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

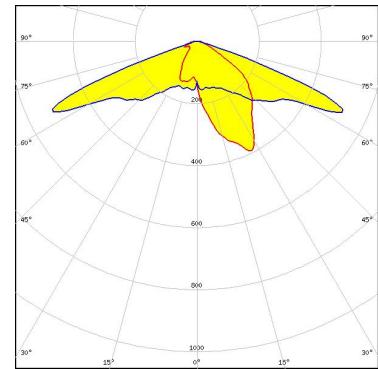


LED	XP-G
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

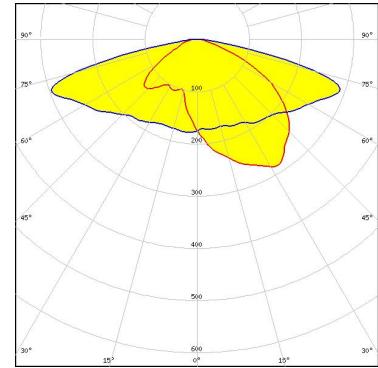

LED	XP-G2
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

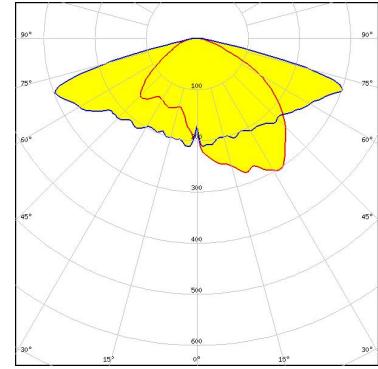

LED	LUXEON TX
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

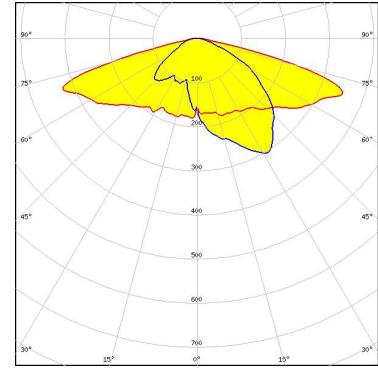


### PHOTOMETRIC DATA (SIMULATED):

#### LUMILEDS

LED	LUXEON V2
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

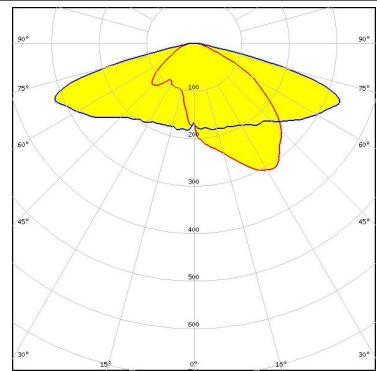

#### NICHIA

LED	NVSxE21A
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

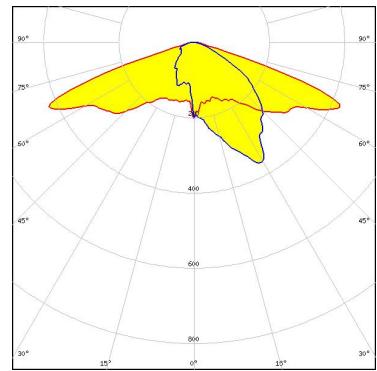

#### OSRAM

LED	OSCONIQ C 2424
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

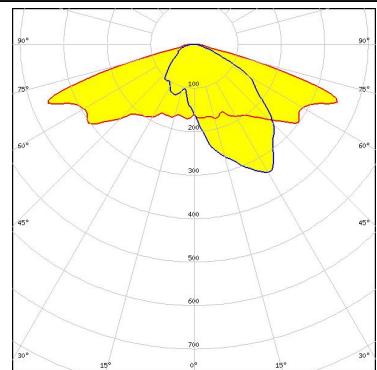

#### OSRAM

LED	OSLON SSL 150
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

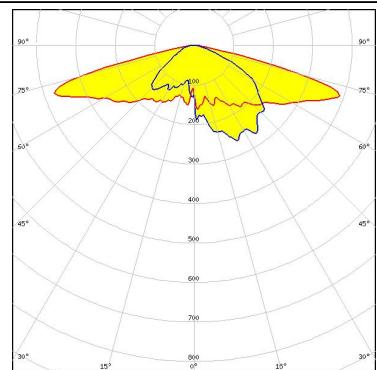

### PHOTOMETRIC DATA (SIMULATED):


#### SAMSUNG

LED LH231B  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

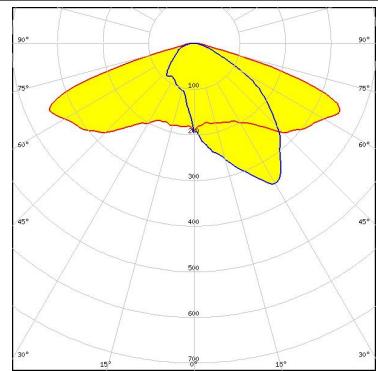


#### SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

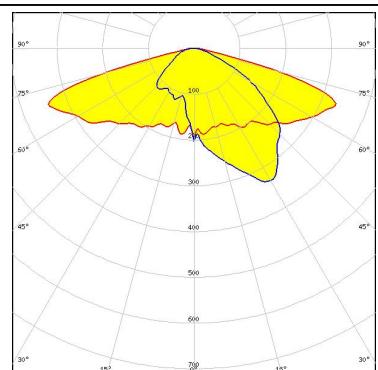


#### SEOUL SEMICONDUCTOR

LED Z8Y22  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

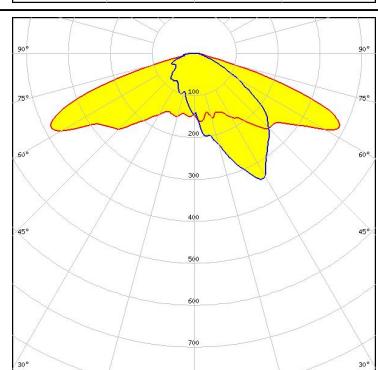

#### SEOUL SEMICONDUCTOR

LED Z8Y22P  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

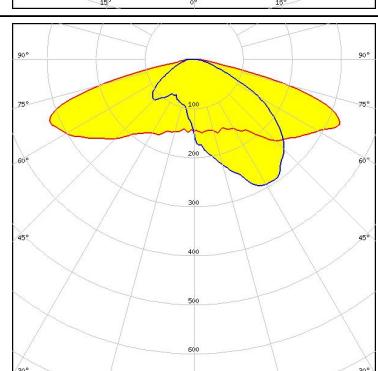

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

**LEDiL Oy**  
Joensuunkatu 13  
FI-24240 SALO  
Finland

**LEDiL Inc.**  
228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

**Ledil Optics Technology  
(Shenzhen) Co., Ltd.**  
# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

**Local sales and technical  
support**  
[www.ledil.com/](http://www.ledil.com/)  
where\_to\_buy

**Shipping locations**  
Salo, Finland  
Hong Kong, China

**Distribution Partners**  
[www.ledil.com/](http://www.ledil.com/)  
where\_to\_buy