



# 3M™ Disconnection Plug SOR FC

The 3M™ Disconnection Plug SOR FC is designed to plug into disconnection cross-connect modules to disconnect circuits (isolate cable side from jumper side) on the following block styles:


3M™ High Density Cross-Connect Module STG2000 C2 Series

3M™ Integrated Splitter Blocks BRCP-SP

## Specifications

### Dimensions

Length: 43.3 mm / 1.70 in.  
 Height: 10 mm / 0.39 in.  
 Width: 8.4 mm / 0.33 in.



### Materials

Test plug body: UL 94 V-0 polycarbonate

## Ordering Information


Model Number	Description	3M ID	Minimum Order
C222909A	Disconnection Plug SOR FC - Red - Bag/100PCS	FQ100004156	10 Bags



3M™ Disconnection Plug SOR FC



3M™ Disconnection Plug SOR FC on the 3M™ Integrated Splitter Block BRCP-SP

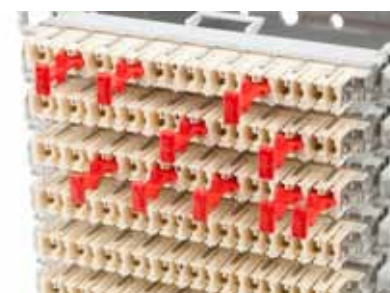

3M™ Disconnection Plug SOR FC on the 3M™ High Density Cross-Connect Module STG2000

### **Compliant with EU RoHS Directive (2005/95/EC)**

"RoHS Compliant 2005/95/EC" means that the product or part ("Product") does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under RoHS. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

3M is a trademark of 3M Company.

### **Important Notice**

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

#### **Warranty; Limited Remedy; Limited Liability.**

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



#### **Communication Markets Division**

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/426 8688  
Fax 800/626 0329  
[www.3M.com/Telecom](http://www.3M.com/Telecom)

Please recycle. Printed in USA.  
© 3M 2011. All rights reserved.  
80-6113-8611-3