
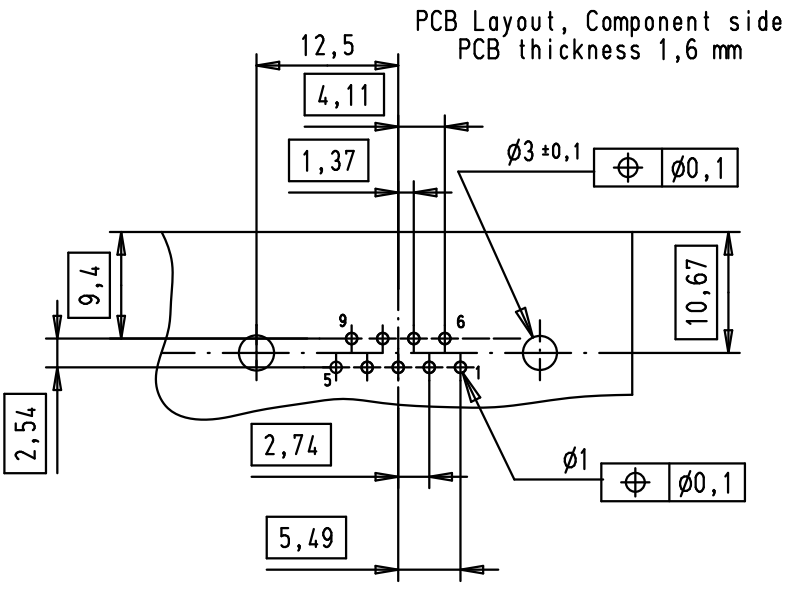
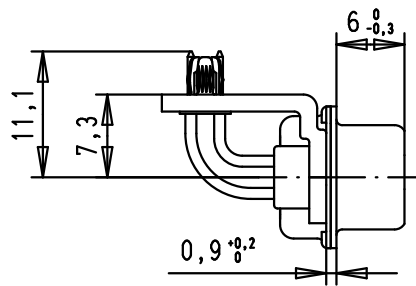
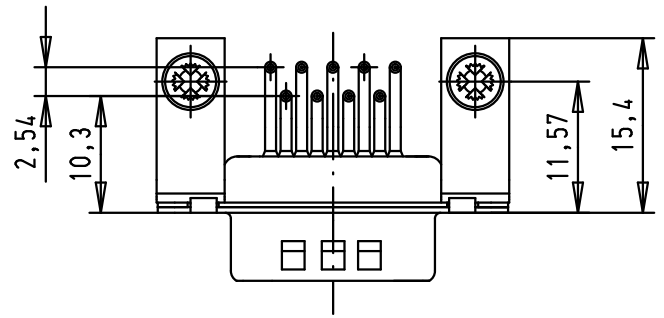


D
C
B
A

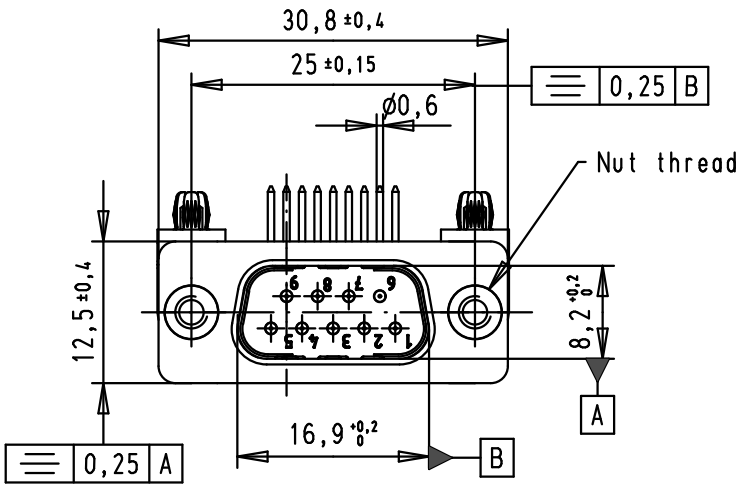

SPECIFICATION


Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100v
Current rating	7,5A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	--
10	--
50	--
100	--
500	30dB
1000	35dB

09641247213	M3
09641247212	4-40UNC-2B
Part number	Nut thread

Mod.	Dot.	Name	Detail.	Dot.	Name
			8-JUL-02	CV	
36283	12/01/12	SD	Insp.	12/01/12	JB
32522	07/02/05	AF	Stand.		
31576	08/12/03	AF			
31058	8-JUL-02	CV			
			HARTING EURL F-95972 Paris		



All Dim. in mm
Orig. Size DIN A 4



D-Sub, male, angled,
9 Poles, with turned solder
pin, metal bracket with nut
and board lock

TB 0964124721x

Sub.

Mo?Mstab/
Scale

1.5:1

Blatt/ Page

1 / 4