


SMPM TO 65 GHz

SMPM Ganged Block: GPPB

Mates With: PRFIA



GPPB	GENDER	NO. OF ROWS	NO. OF POSITIONS	PLATING	ST	SM	1N
------	--------	-------------	------------------	---------	----	----	----

-PF
= Plug
Full Detent


-PS
= Plug
Smooth Bore

-1

-08
(Per Row)

-EG
= 50 μ " (1.27 μ m)
heavy Gold
center contact,
10 μ " (0.25 μ m)
Gold outer body

PRELIMINARY

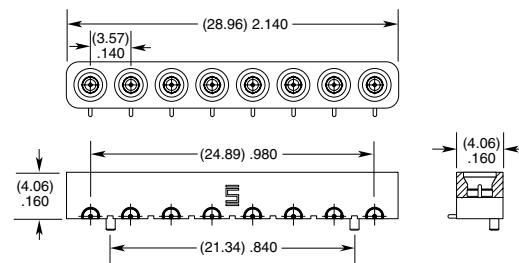

-PF-1-08-EG-ST-SM-1N SHOWN

IN DEVELOPMENT

2, 4, 6, 10 Positions Counts
(8.33 mm) .328" Pitch
(5.08 mm) .200" Pitch
Edge Mount termination
Contact RFGroup@samtec.com

SMPM Bullet Adaptor: PRFIA

Mates With: SMPM, GPPB



PRFIA	SMPM	GENDER	GENDER	ORIENTATION	OPTION
-------	------	--------	--------	-------------	--------

-J
= Jack

-J
= Jack


-S
= Straight

-1
= (5.33) .210


-2
= (8.31) .327

-3
= (12.70) .500


-4
= (4.22) .166




OPTION 1



OPTION 2



OPTION 3



OPTION 4