

## Han Megabit insert female 1 Entry, (GND)

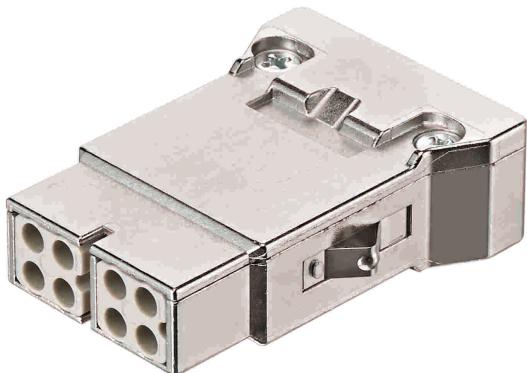


Image is for illustration purposes only. Please refer to product description.

### Identification

|               |   |
|---------------|---|
| Category      | Inserts   |
| Specification | Han® Megabit insert<br>2x 4 contacts<br>One entry |

### Version

|                    |   |
|--------------------|---|
| Termination method | Crimp termination   |
| Gender             | Female  |
| Number of contacts | 8   |
| further contacts   | + shielding   |
| Details            | With additional shield connection to the hinged frame<br>Please order crimp contacts separately.<br>Please order adapter module separately. |
| Details            | Not suitable for hoods/housings low construction as well as Han-Modular® Eco, Han-Modular® Compact and Han-Modular® Twin.                   |

### Technical characteristics

|                              |                              |
|------------------------------|------------------------------|
| Conductor cross-section      | 0.14 ... 2.5 mm <sup>2</sup> |
| Rated current                | 10 A                         |
| Rated voltage                | 50 V                         |
| Rated impulse voltage        | 0.8 kV                       |
| Pollution degree             | 3                            |
| Transmission characteristics | Cat. 5 Class D up to 100 MHz |

## Technical characteristics

|                               |   |
|-------------------------------|---|
| Data rate                     | 10 Mbit/s<br>100 Mbit/s<br>1 Gbit/s<br>2.5 Gbit/s |
| Contact resistance, shielding | ≤100 mΩ   |
| Limiting temperature          | -40 ... +85 °C                                    |
| Mating cycles                 | ≥500  |

## Material properties

|   |                              |
|---|------------------------------|
| Material (insert)                         | Polycarbonate (PC)           |
| Colour (insert)                           | RAL 7032 (pebble grey)       |
| Material (shielding)                      | Zinc die-cast, nickel-plated |
| Material flammability class acc. to UL 94 | V-0                          |
| RoHS                                      | compliant                    |
| ELV status                                | compliant                    |
| China RoHS                                | e                            |
| REACH Annex XVII substances               | Not contained                |
| REACH ANNEX XIV substances                | Not contained                |
| REACH SVHC substances                     | Not contained                |
| California Proposition 65 substances      | Not contained                |

## Specifications and approvals

|                |  |
|----------------|--|
| Specifications | EN 60664-1<br>IEC 61984                                    |
| Approvals      | DNV GL   |
| UL / CSA       | UL 1977 ECBT2.E235076<br>CSA-C22.2 No. 182.3 ECBT8.E235076 |

## Commercial data

|                                |  |
|--------------------------------|--|
| Packaging size                 | 1  |
| Net weight                     | 45.7 g   |
| Country of origin              | Germany  |
| European customs tariff number | 85366990   |
| eCl@ss                         | 27440218 Module for industrial connectors (data) |