

W-EYK, Insert Pt Temperature Sensor with Stainless-Steel Housing according to DIN EN 60751

Temperature range -40 °C to +500 °C

- Platinum sensor encapsulated in protective stainless steel housing
- Hi-temperature fiberglass insulated connection wires
- High maximum operating temperature +500 °C
- Housing resistant to oils, organic and inorganic bases and alkalis (medium concentration)

The dimensionally stable stainless steel protective tube allows easy mounting in corresponding mating holes. Applications include temperature measurement in gas, including HVAC equipment at elevated temperatures. Measurement accuracy is optimized for temperatures between 0 °C and 100 °C.

Nominal Resistance R_0 [Ω]	Tolerance Class	Order Number
Pt100	F 0.10 / Class 1/3 B	30500109
Pt1000	F 0.10 / Class 1/3 B	31500989

Temperature and Tolerance Range

Tolerance Class F 0.10 / 1/3 B 0 °C to +100 °C

Temperature Coefficient

TCR = 3850 ppm/K

Connection Wire

Fiberglass insulated twisted pair Ni wire
2 x 0.5 mm (24 AWG), 300 mm long

Internal Conductor Resistance

0.04 Ω/ft.(0.48 Ω/m) for each conductor

Housing

Closed end tube, stainless steel 1.4571 (316 Ti)

Applications

- HVAC
- Data Logging
- Laboratory instrumentation
- Oven temperature
- Hi-temp temperature sensing



Image for illustration purposes only

W-EYK, Insert Pt Temperature Sensor with Stainless-Steel Housing according to DIN EN 60751

Temperature range -40 °C to +500 °C

Features

- Corrosion resistant stainless steel protective housing
- High- temperature fiberglass-insulated connection wires
- Widely used for a variety of temperature sensing applications
- Available in Pt100 or Pt 1000 resistance values
- +500 °C maximum operating temperature

Options

- Wire length
- Resistance Value
- Connectors

Resistance vs Temperature Table

Reference table @ www.heraeus.com/technical-information

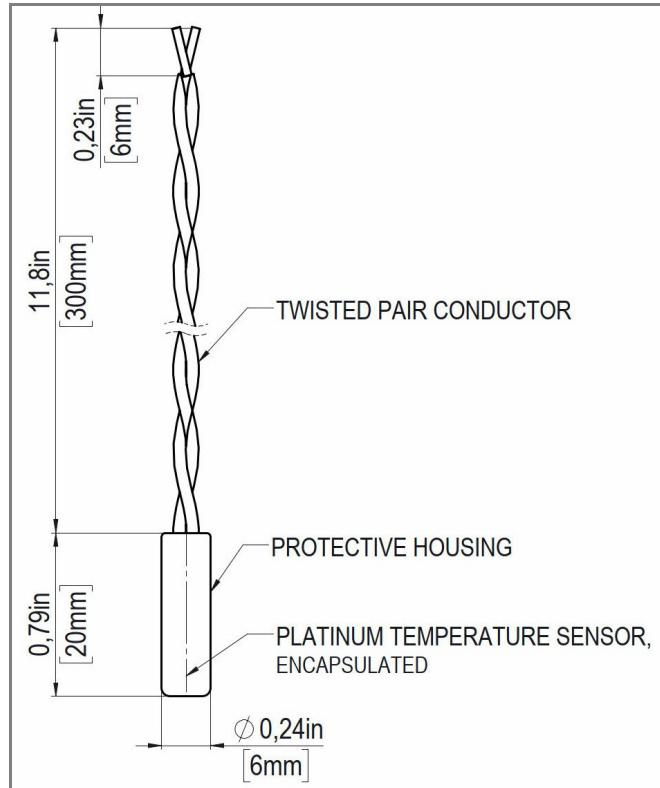


Image for illustration purposes only



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantees whatsoever. Furthermore, the information provided in this data sheet does not constitute a warranty, implied or express, whatsoever, including but not limited to warranties of merchantability, fitness for a particular purpose, or use. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use.

The customer is solely responsible to determine whether the product is suited for customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products of Heraeus is exclusively subject to the Terms and Conditions of Sale of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos USA, a division of Heraeus Epurio LLC, 770 Township Line Road, Suite 300, Yardley, Pennsylvania, USA 19067