

## SPECIFICATIONS:

## ELECTRICAL:

INSULATOR RESISTANCE: 5 G OHMS Min.  
 DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.  
 OPERATING TEMPERATURE: -55° C ~ +125° C  
 POWER CONTACT RESISTANCE: 1.0 mOHMS Max.  
 SIGNAL CONTACT RESISTANCE: 2.7 mOHMS Max.  
 POWER PINS: SEE PART NUMBER BELOW  
 SIGNAL PINS: 5 AMPS

## MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.  
 CONTACT SEPARATOR FORCE: 0.3Kg Min.

## MATERIALS:

CONTACTS: COPPER ALLOY  
 INSULATOR: PBT UL94V-0 RATED, BLK  
 230°C PROCESS TEMP.  
 SHELL: STEEL

## FINISH:

SHELL: NICKEL  
 CONTACTS: FULL GOLD FLASH

680M9W4103LYY1

2 = 20 AMP  
 4 = 40 AMP  
 0 = NO HARDWARE  
 1 = 0.098" CN SOLDER SIDE  
 2 = 0.236" CN SOLDER SIDE  
 3 = 0.236" CN MATING SIDE  
 1 = GOLD FLASH  
 2 = 30u" GOLD  
 \*CONTACT NORCOMP FOR MORE OPTIONS

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE  
 THE PROPERTY OF NorComp AND SHALL NOT  
 BE REPRODUCED, COPIED OR USED AS THE  
 BASIS FOR THE MANUFACTURE OR SALE OF  
 APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
 M. SIGMON  
 DATE:  
 07/22/2013

UNITS = inch [mm]


DO NOT SCALE FROM DRAWING

NorComp


SCALE: NTS	SHEET 1	OF 2	REV 4
DWG NO. 680M9W4103LYY1			

**HARDWARE OPTIONS**  
**CLINCH NUTS HAVE #4-40 INTERNAL THREADS THRU**


0 ..... NO HARDWARE




1 ..... 0.098" SOLDER SIDE

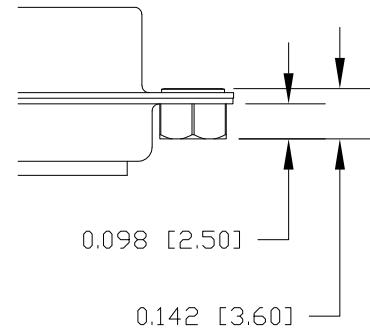


2 ..... 0.236" SOLDER SIDE

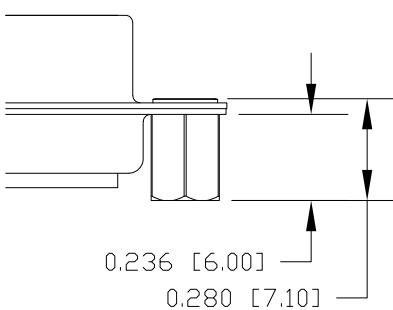


3 ..... 0.236" MATING SIDE

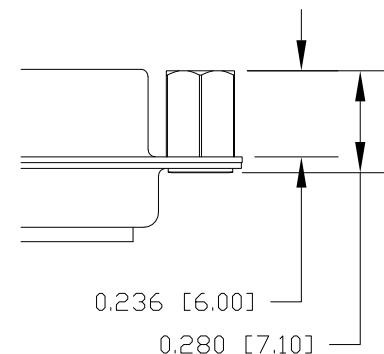


**NOTE:**  
**SIGNAL AND POWER CONTACTS**  
**COME PRE-LOADED INTO INSULATORS**

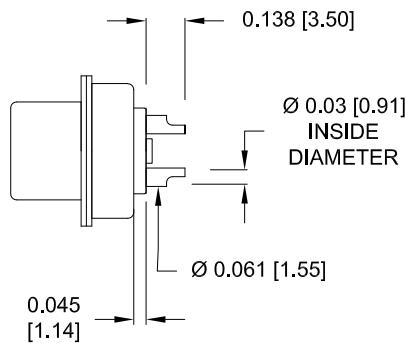

**SIGNAL CONTACTS**  
 ACCEPTS UP TO 20 AWG WIRE

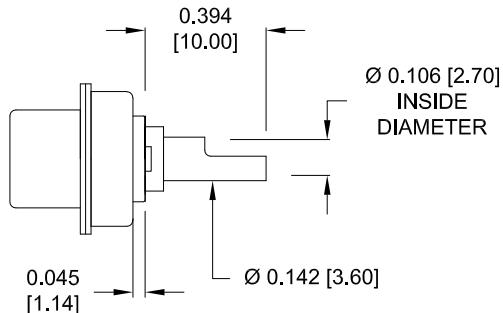

**20 AMP POWER CONTACTS**  
 ACCEPTS UP TO 12 AWG WIRE

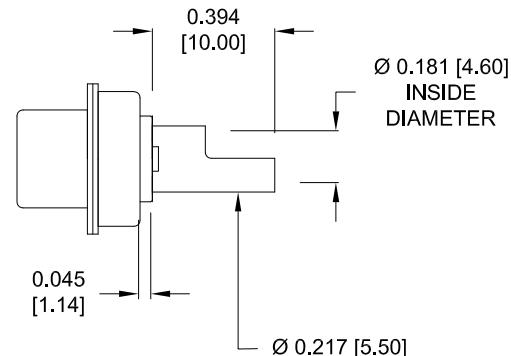

**40 AMP POWER CONTACTS**  
 ACCEPTS UP TO 8 AWG WIRE

**RoHS COMPLIANT**

THESE DRAWINGS AND SPECIFICATIONS ARE  
 THE PROPERTY OF NorComp AND SHALL NOT  
 BE REPRODUCED, COPIED OR USED AS THE  
 BASIS FOR THE MANUFACTURE OR SALE OF  
 APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	M. SIGMON
DATE:	07/22/2013

UNITS = inch [mm]

**NorComp**

SCALE: NTS	SHEET 2 OF 2	REV 4
DWG NO. 680M9W4103LYY1		