


Model 50

STA[®] Pull DC Tubular Solenoid

Size: 1/2" OD X 1/2" L

ALL PRODUCTS ARE RoHS COMPLIANT

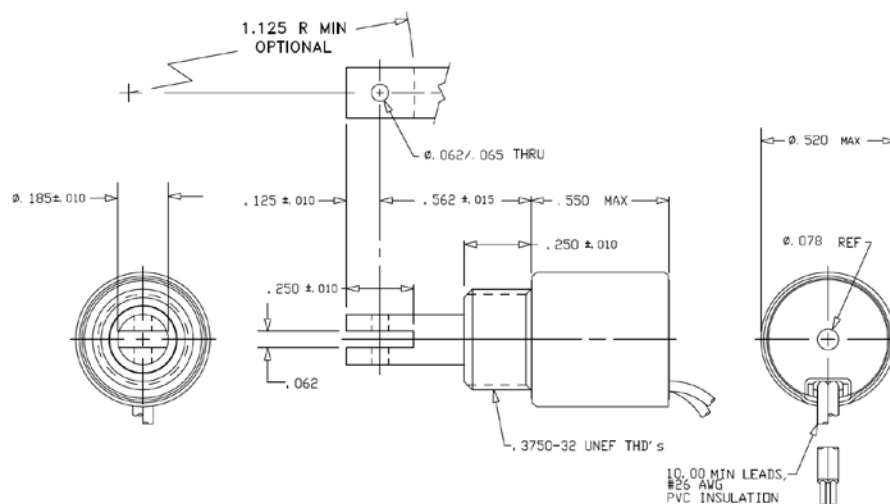

Solenoid shown energized with
Supplied with hex nut shipped I
Spring kits available (consult factory)

Part No.	Duty Cycle	Voltage	Resistance (Ω) ± 5%	Max On Time	Power (W)	Current (A)
195200-234	Intermittent	12 VDC	13.10	5 Secs	11.0	0.92
195200-236	Continuous	10 VDC	29.05	∞	3.0	0.34
195200-237	Continuous	12 VDC	45.70	∞	3.0	0.26
195200-237	Intermittent	24 VDC	45.70	5 Secs	12.0	0.53
195200-240	Continuous	24 VDC	185.0	∞	3.1	0.13

Continuous Duty = 100% "On" Time
Intermittent Duty = 25% "On" Time
When ordering please refer to Part No. as listed above
Please consult factory for custom configurations and other pole face angles

Stroke (in.)	Typical Pull Force (oz.)								Holding Force (oz.)
	0.010	0.020	0.030	0.040	0.050	0.060	0.080	0.100	
Continuous Duty	16.5	10.4	6.2	4.2	3.1	2.2	1.5	1.0	---
Intermittent Duty	22.0	17.0	14.7	11.9	9.4	7.5	5.1	3.6	---

Additional Specifications:

Dielectric Strength: 500 VRMS
Recommended Heat Sink: Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C with solenoid mounted on the equivalent of an aluminum plate measuring 2" square X 1/8" thick.
Total Unit Weight: 0.51 oz. / 14.5 g
Plunger Weight: 0.088 oz. / 2.5 g