

STELLA-G2-T2

IESNA Type II (medium) beam, applicable for European P-class standard pedestrian lighting and M-class roads. Compatible with up to 30 mm LES size COBs. Variant with black frame.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 90.0 mm
Height	27 mm
Fastening	socket
Ingress protection classes	IP67
ROHS compliant	yes ⓘ





MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STELLA-G2-T2	Single lens	Silicone	clear	
STELLA-FRAME	Holder	PA66	black	

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
FN16356_STELLA-G2-T2 » Box size: 480 x 280 x 300 mm	Single lens	135	15	7.9

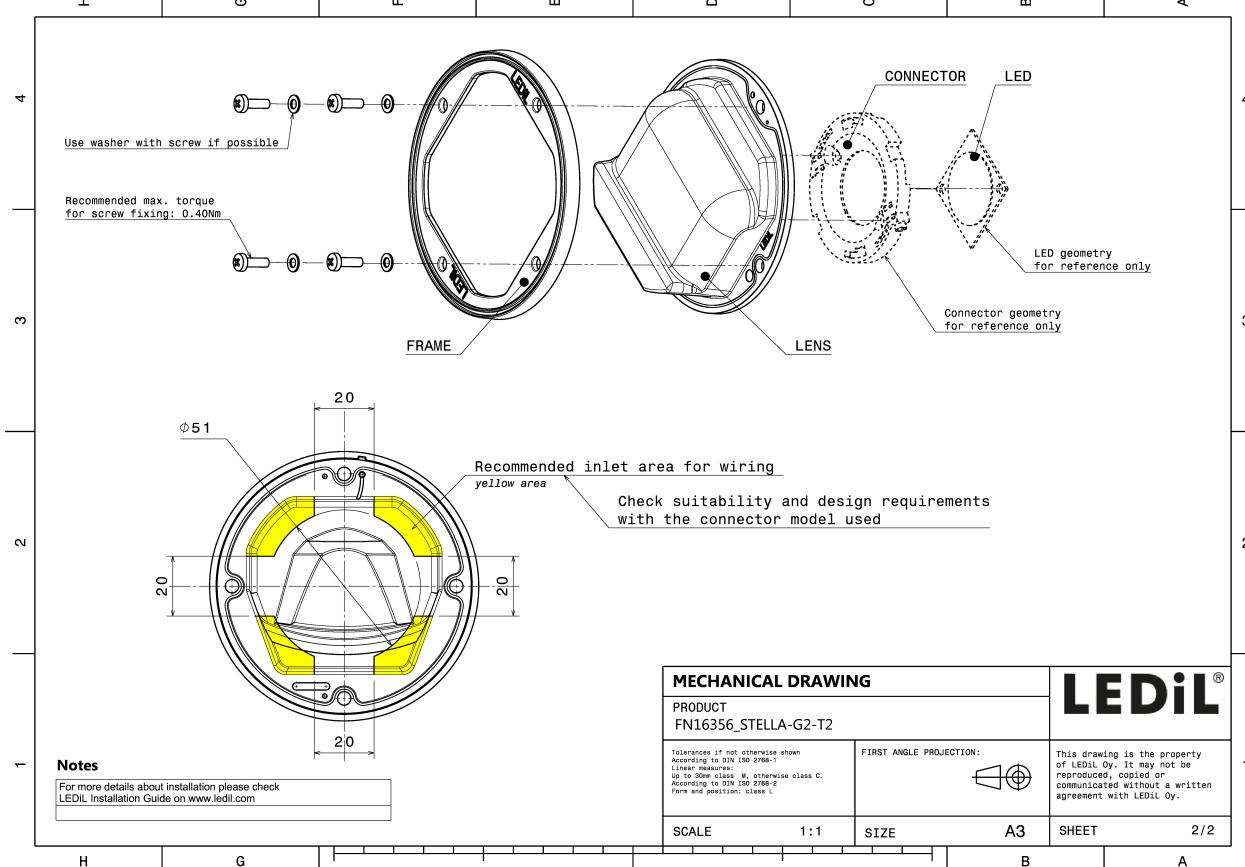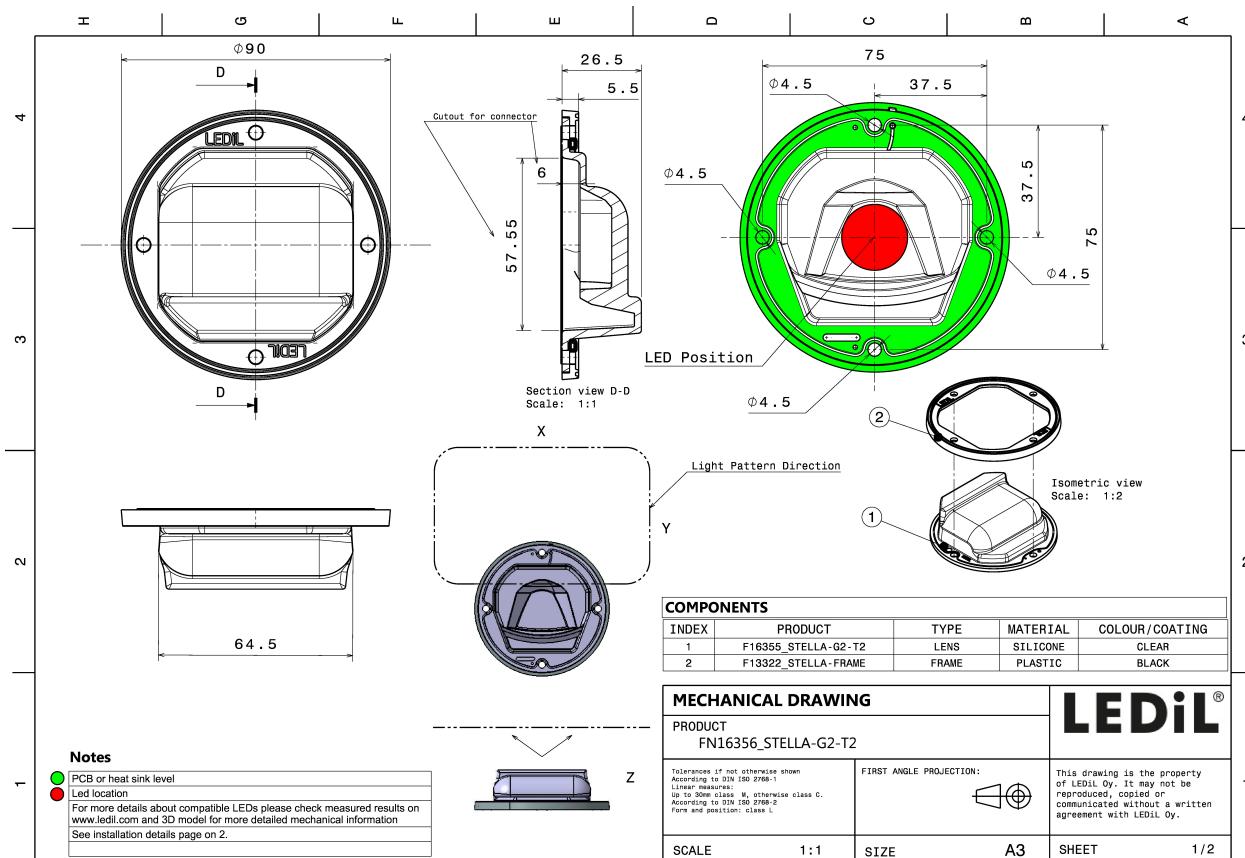


See also our general installation guide: www.ledil.com/installation_guide


PHOTOMETRIC DATA (MEASURED):




LED V22 Gen7
FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 TE Connectivity: 2213480-1

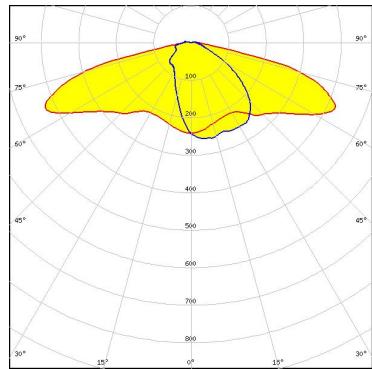


LED V22 Gen7
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 Bender Wirth: 431 Typ Z1

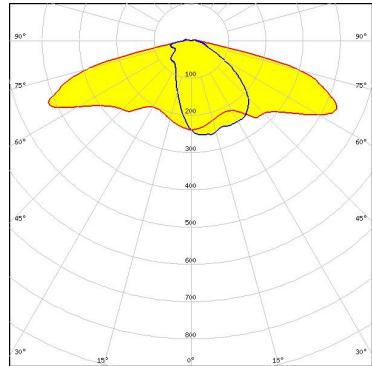

LED V22 Gen7
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

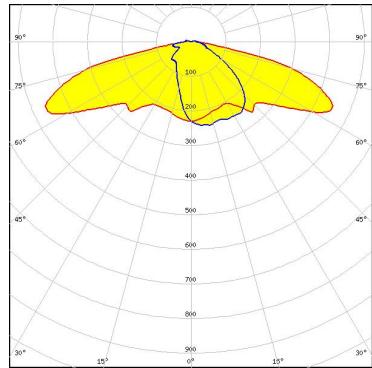

LED CXA/B 25xx
FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

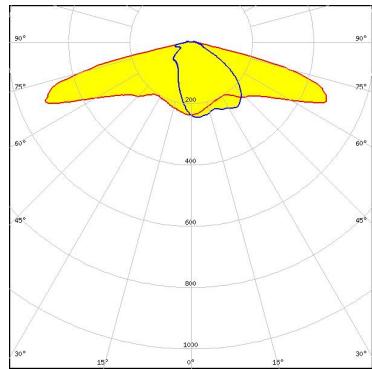

PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LED LC040D / LC060D / LC080D

FWHM / FWTM Asymmetric


Efficiency 86 %

Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour White

Required components:

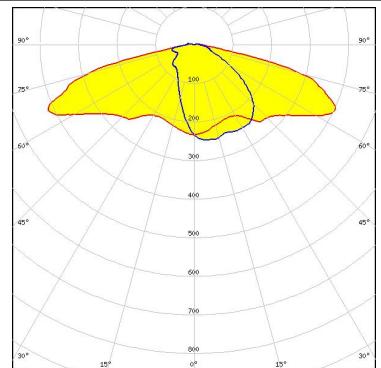

SAMSUNG

LED LC040D / LC060D / LC080D

FWHM / FWTM Asymmetric


Efficiency 86 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

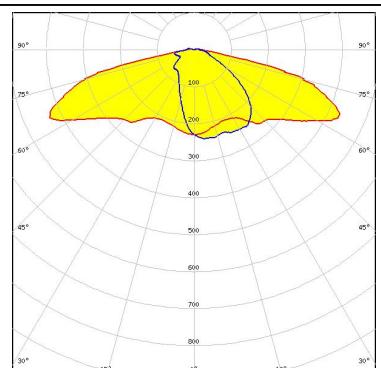


PHOTOMETRIC DATA (SIMULATED):




LED	V18 Gen 8
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 462 Typ Z1

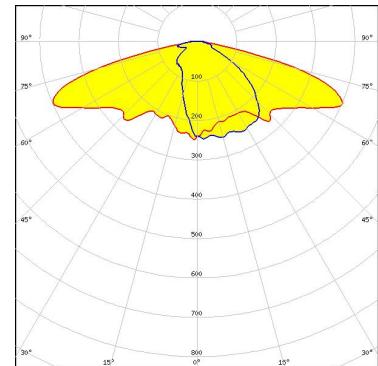

LED	VERO29
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

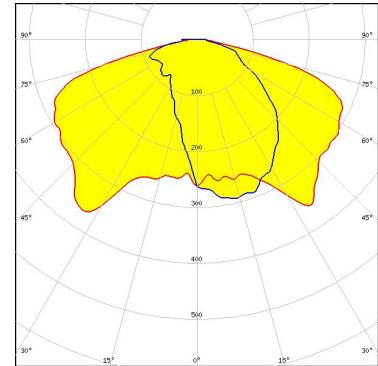

CITIZEN

LED	CLL03x/CLU03x
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

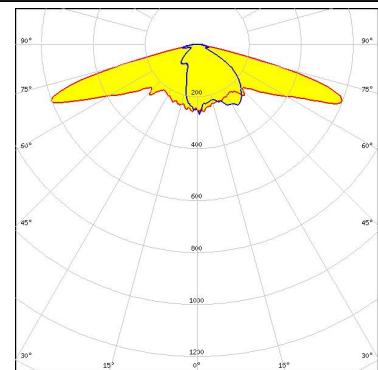

CITIZEN

LED	CLL04x/CLU04x
FWHM / FWTM	Asymmetric
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

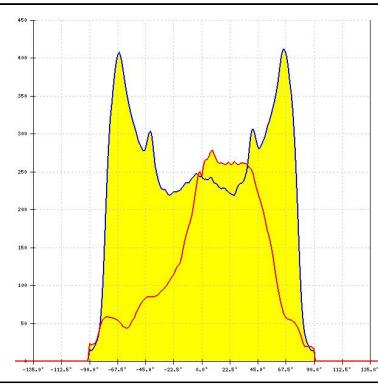

PHOTOMETRIC DATA (SIMULATED):




LED CMT19xx
 FWHM / FWTM Asymmetric
 Efficiency 87 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:




LED CMT28xx
 FWHM / FWTM Asymmetric
 Efficiency 87 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



LED CMT28xx
 FWHM / FWTM Asymmetric
 Efficiency 82 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

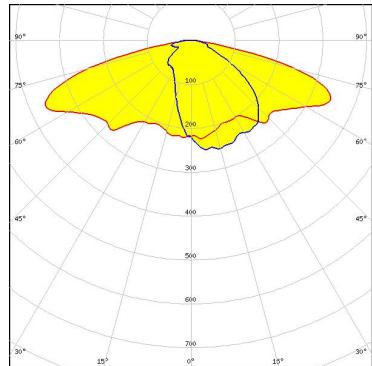

LED CXA/B 30xx
 FWHM / FWTM Asymmetric
 Efficiency 86 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

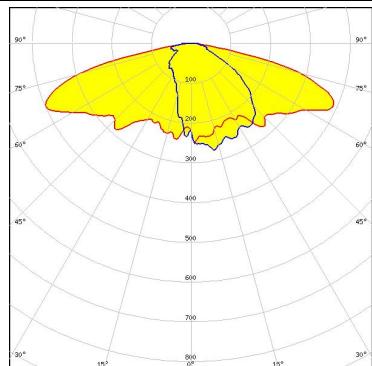


PHOTOMETRIC DATA (SIMULATED):

LUMILEDS

LED	LUXEON CoB 1321
FWHM / FWTM	Asymmetric
Efficiency	90 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

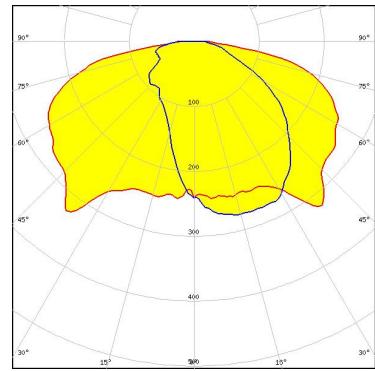


OSRAM

Opto Semiconductors

LED	Duris S8
FWHM / FWTM	Asymmetric
Efficiency	88 %
Peak intensity	0.4 cd/lm
LEDs/each optic	16
Light colour	White

Required components:

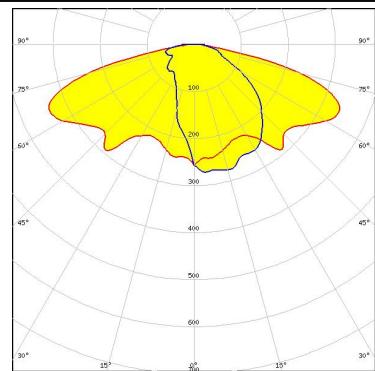

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

**Ledil Optics Technology
(Shenzhen) Co., Ltd.**
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

**Local sales and technical
support**
www.ledil.com/
where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy