

## LILIAN-ON

~10° + 80° beam for wall grazing

### TECHNICAL SPECIFICATIONS:

Dimensions	286.4 x 27.0 mm
Height	14.8 mm
ROHS compliant	yes ⓘ






### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
LILIAN-ON	Linear lens	PMMA	clear	

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16507_LILIAN-ON » Box size: 400 x 300 x 160 mm	84	84	14	4.3

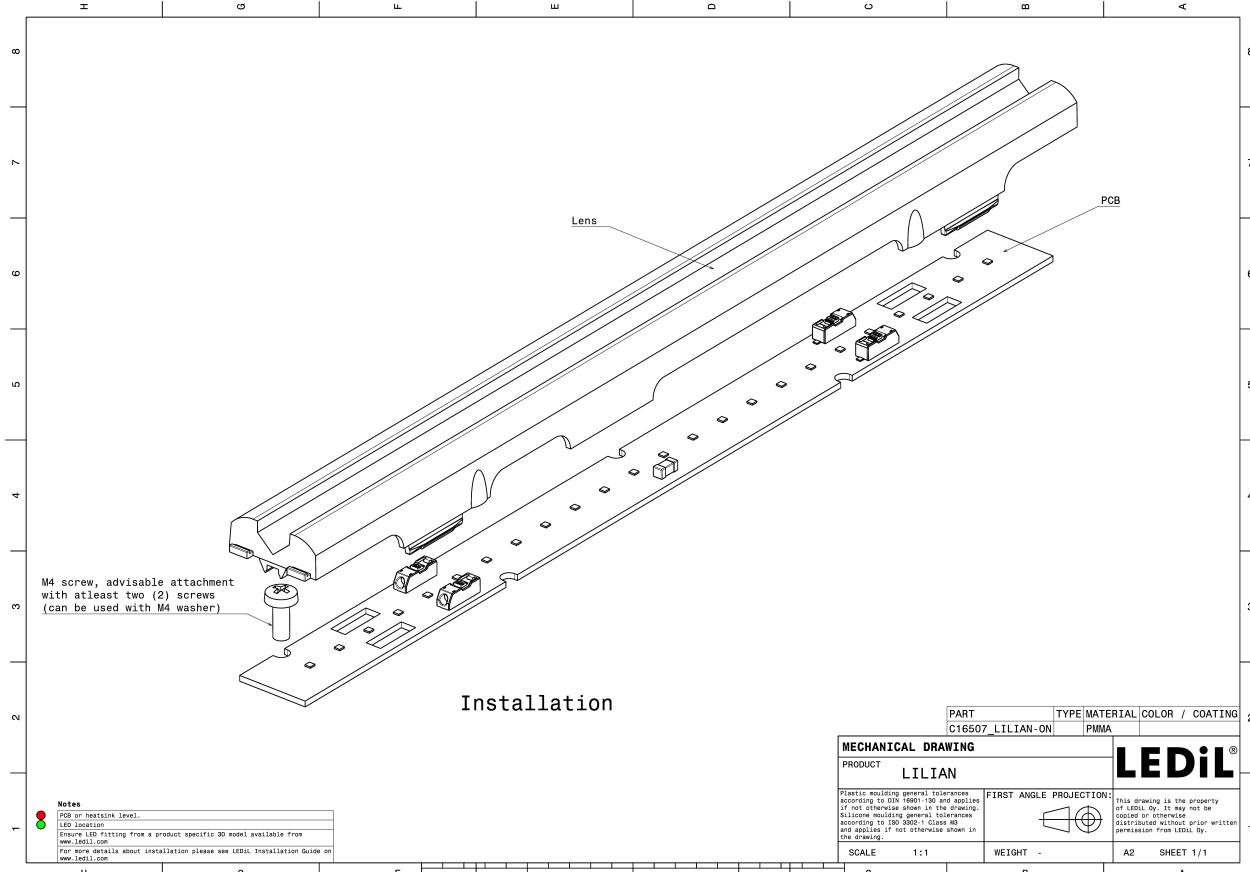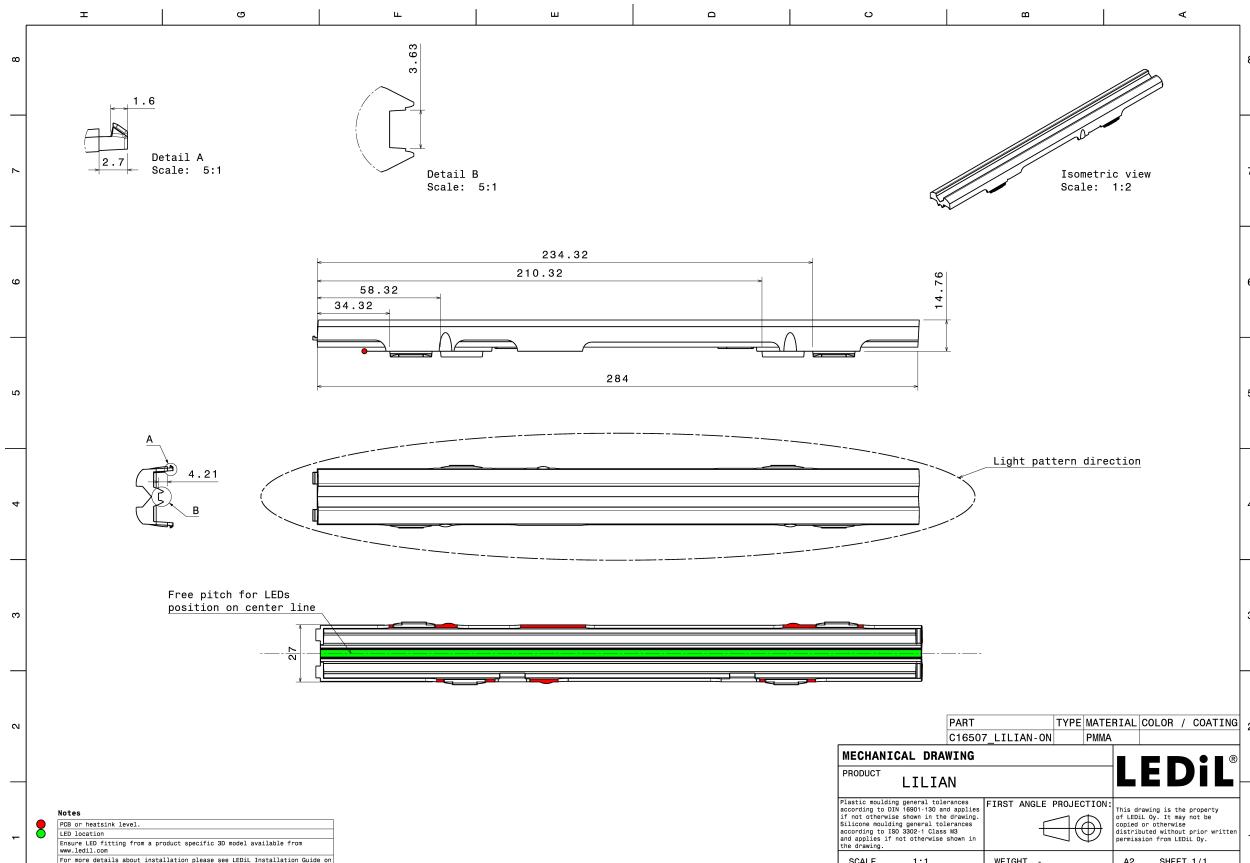

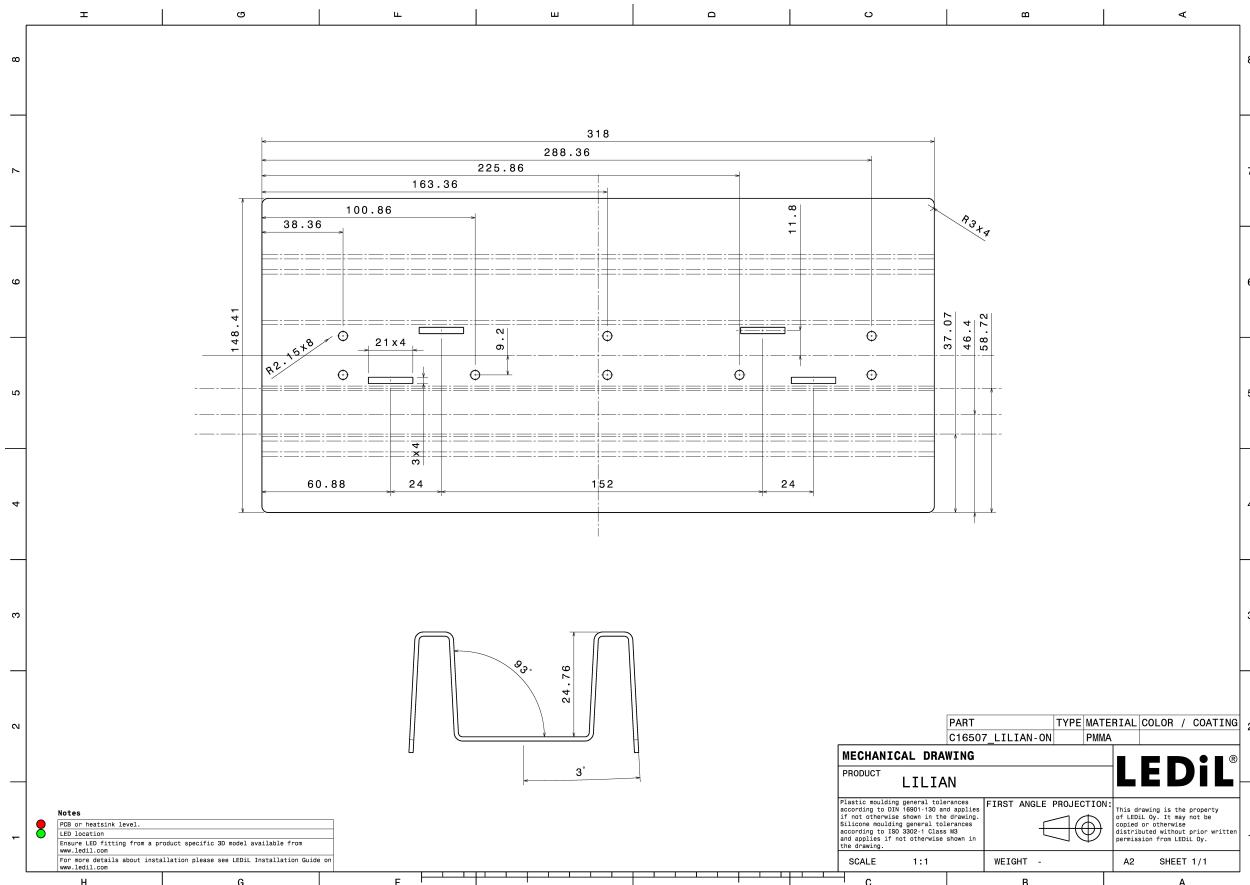





PART	TYPE	MATERIAL	COLOR / COATING
C16507_LILIAN-ON		PMMA	
<b>MECHANICAL DRAWING</b>			
<b>PRODUCT</b> LILIAN			<b>LEDiL®</b>
Plastic moulding general tolerances apply. If not otherwise shown in the drawing. Silicone moulding general tolerances apply. If not otherwise shown in the drawing. and applies if not otherwise shown in the drawing.			<b>FIRST ANGLE PROJECTION:</b> This drawing is the property of LEDiL Oy. It may not be copied or otherwise reproduced in whole or in part without prior written permission from LEDiL Oy.
SCALE 1:1		WEIGHT -	A2 SHEET 1/1

See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

## PHOTOMETRIC DATA (MEASURED):



## PHOTOMETRIC DATA (SIMULATED):

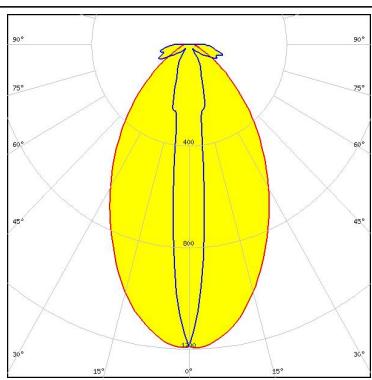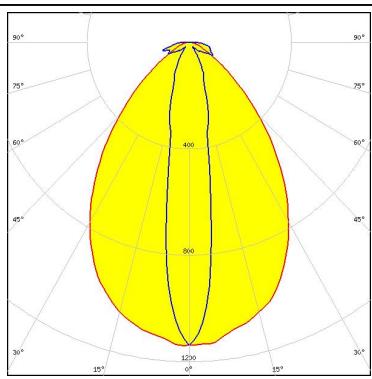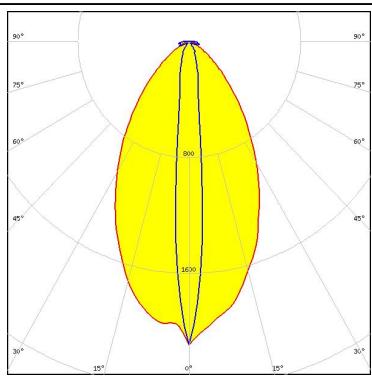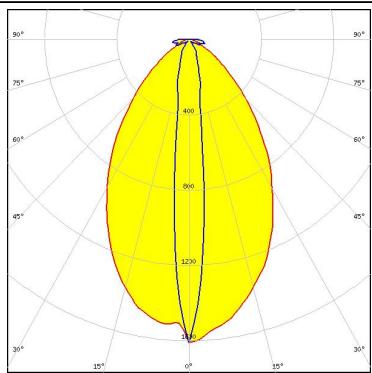
<p><b>CREE → LED</b></p> <p>LED XD16</p> <p>FWHM / FWTM <math>64.0 + 12.0^\circ / 117.0 + 46.0^\circ</math></p> <p>Efficiency 87 %</p> <p>Peak intensity 1.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>CREE → LED</b></p> <p>LED XM-L</p> <p>FWHM / FWTM <math>76.0 + 18.0^\circ / 118.0 + 54.0^\circ</math></p> <p>Efficiency 86 %</p> <p>Peak intensity 1.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour RGBW</p> <p>Required components:</p>	
<p><b>CREE → LED</b></p> <p>LED XP-E</p> <p>FWHM / FWTM <math>57.0 + 11.0^\circ / 106.0 + 34.0^\circ</math></p> <p>Efficiency 88 %</p> <p>Peak intensity 2.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>CREE → LED</b></p> <p>LED XP-G</p> <p>FWHM / FWTM <math>66.0 + 11.0^\circ / 112.0 + 36.0^\circ</math></p> <p>Efficiency 87 %</p> <p>Peak intensity 1.6 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	

## PHOTOMETRIC DATA (SIMULATED):




LED	XP-G2
FWHM / FWTM	70.0 + 12.0° / 115.0 + 40.0°
Efficiency	88 %
Peak intensity	1.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

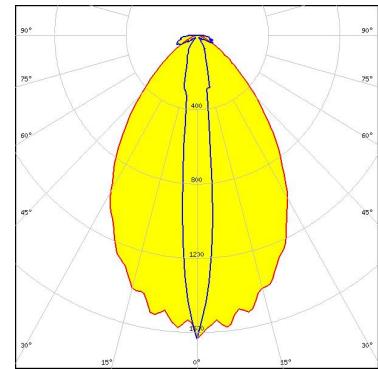


LED	LUXEON 2835 Line
FWHM / FWTM	72.0 + 12.0° / 118.0 + 32.0°
Efficiency	90 %
Peak intensity	2 cd/lm
LEDs/each optic	1
Light colour	RGBW

Required components:

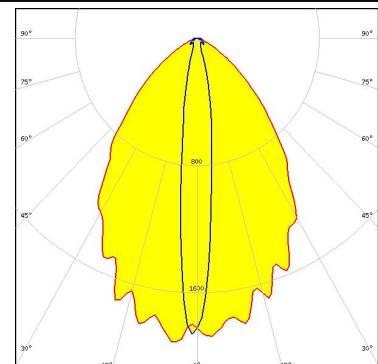


LED	LUXEON 3030 2D (Square LES)
FWHM / FWTM	72.0 + 18.0° / 118.0 + 58.0°
Efficiency	87 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

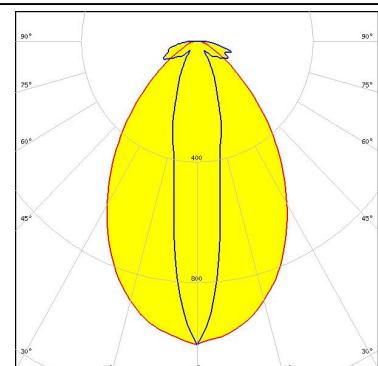

LED	LUXEON 5050 Round LES
FWHM / FWTM	70.0 + 18.0° / 118.0 + 58.0°
Efficiency	87 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

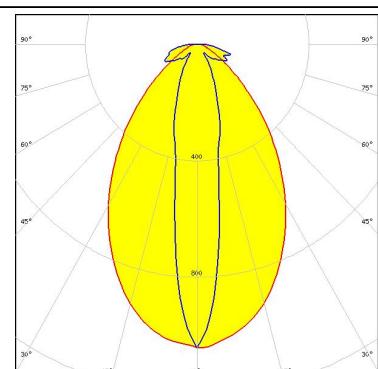


## PHOTOMETRIC DATA (SIMULATED):

### LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	72.0 + 9.0° / 118.0 + 31.0°
Efficiency	91 %
Peak intensity	2.4 cd/lm
LEDs/each optic	1
Light colour	RGBW


Required components:

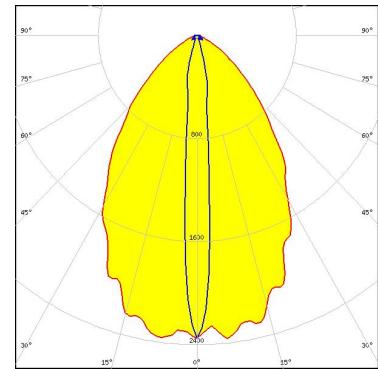

### NICHIA

LED	NF2x757G
FWHM / FWTM	76.0 + 16.0° / 118.0 + 32.0°
Efficiency	87 %
Peak intensity	1.7 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

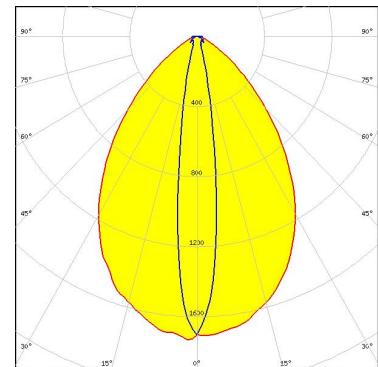

### OSRAM

LED	Duris S5 (Single chip)
FWHM / FWTM	66.0 + 12.0° / 114.0 + 47.0°
Efficiency	87 %
Peak intensity	1.4 cd/lm
LEDs/each optic	1
Light colour	White


Required components:

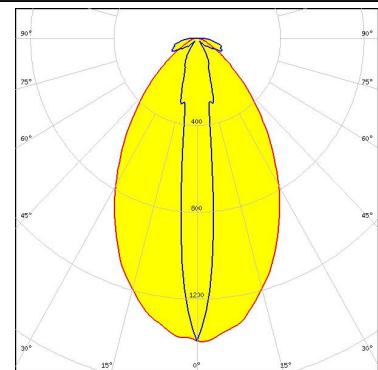

### SAMSUNG

LED	LM28xB Series
FWHM / FWTM	74.0 + 14.0° / 116.0 + 32.0°
Efficiency	88 %
Peak intensity	1.9 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

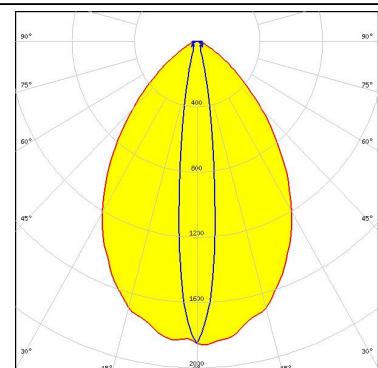

## GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

## MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

## PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

**LEDiL Oy**  
Joensuunkatu 13  
FI-24240 SALO  
Finland

**LEDiL Inc.**  
228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

**Ledil Optics Technology  
(Shenzhen) Co., Ltd.**  
# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

**Local sales and technical  
support**  
[www.ledil.com/](http://www.ledil.com/)  
where\_to\_buy

**Shipping locations**  
Salo, Finland  
Hong Kong, China

**Distribution Partners**  
[www.ledil.com/](http://www.ledil.com/)  
where\_to\_buy