



REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	11/10/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPX4LLK-SARF3OGTX9-6IN (6 INCHES)
CB1.37-IPX4LLK-SARF3OGTX9-8IN (8 INCHES)

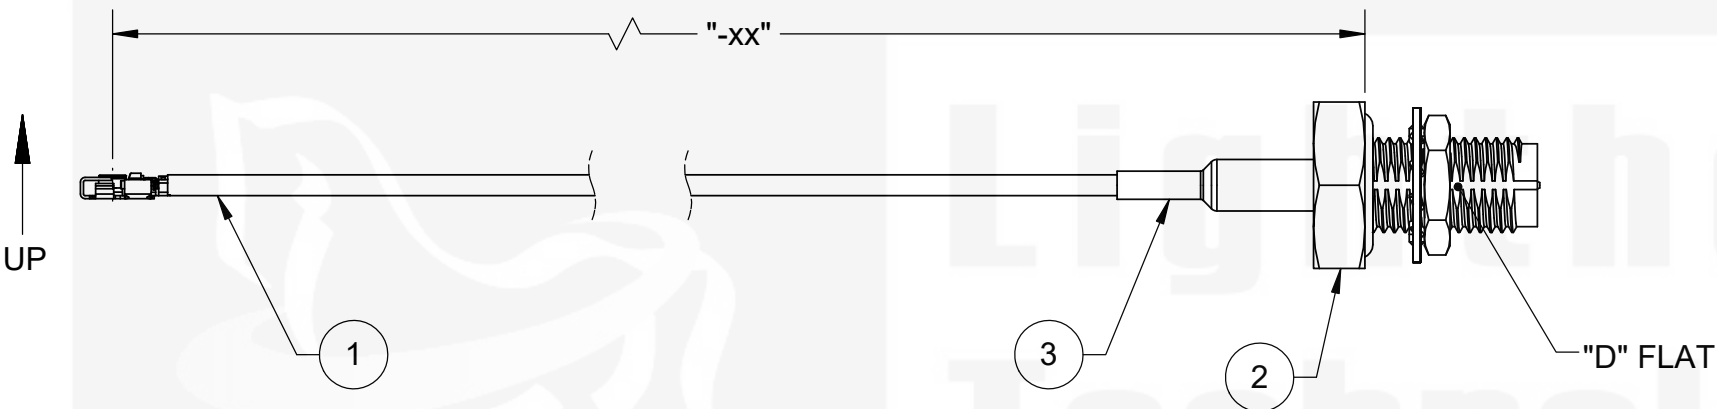


ITEM	PART NUMBER	DESCRIPTION	QTY
1	IPX4LLK-137	IPX4L (MHF4L), LOCKING, 1.37MM COAX	1
2	SASRF13ROGT-113-X9	SMA, REV POL JACK, BLKHD, O-RING, IP-67, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

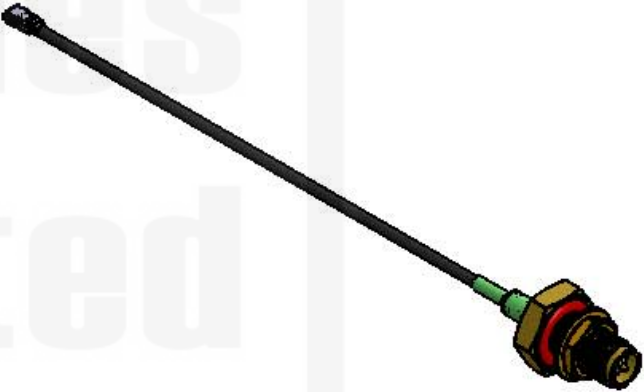

SCALE: NONE

IPX® AND MHF® ARE REGISTAERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING			 Lighthorse Technologies San Diego, CA WWW.RFCONNECTOR.COM	
TOLERANCES UNLESS OTHERWISE SPECIFIED				
DIMENSIONS ARE IN MILLIMETERS			TITLE: CABLE ASSEMBLY, I-PEX LOCKING, (MHF4L) R/A JACK, CRIMP TO SMA, RP JACK, REAR BULKHEAD, O-RING, IP-67, 1.37MM COAX	
X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30°  THIRD ANGLE PROJECTION				
CUSTOMER APPROVAL				
SIGN / DATE:			SIZE	
ENG APPR.			PART/DWG. NO:	
CHECKED			REV	
DRAWN			B	
P. BURDGE			CB1.37-IPX4LLK-SARF3OGTX9-xxIN	
11-10-2020			1	
NAME			SCALE: 2:1	
DATE			FILE NAME	
			SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

