

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

2162731044

Status:


Active

Overview:

SL Modular Connectors

Description:

SL Male-to-Pigtail Off-the-Shelf (OTS) Cable Assembly, Positive Lock, Single Row, 600.00mm Length, Tin (Sn) Plating, 4 Circuits, Black

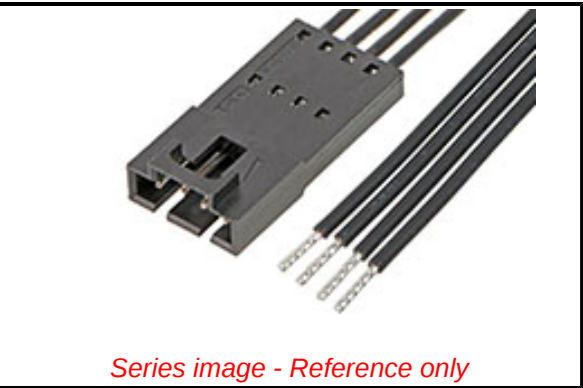

Documents:

3D Model

3D Model (PDF)

Drawing (PDF)

Datasheet (PDF)

RoHS Certificate of Compliance (PDF)

|                                |                        |
|--------------------------------|------------------------|
| General                        |                        |
| Product Family                 | Cable Assemblies       |
| Series                         | 216273                 |
| Application                    | Signal, Wire-to-Wire   |
| Assembly Configuration         | Single Ended Connector |
| Connector to Connector         | SL-to-Pigtail          |
| Overmolded                     | No                     |
| Overview                       | SL Modular Connectors  |
| Product Name                   | SL                     |
| Type                           | Discrete Wire Assembly |
| UPC                            | 193264731589           |
| Physical                       |                        |
| Cable Length                   | 600.00mm               |
| Circuits (Loaded)              | 4                      |
| Color - Resin                  | Black                  |
| Gender                         | Male-Pigtail           |
| Lock to Mating Part            | Yes                    |
| Material - Metal               | Phosphor Bronze        |
| Material - Plating Mating      | Tin                    |
| Material - Plating Termination | Tin                    |
| Material - Resin               | Polyester Alloy        |
| Net Weight                     | 12.290/g               |
| Number of Rows                 | 1                      |
| Packaging Type                 | Bag                    |
| Pitch - Mating Interface       | 2.54mm                 |
| Single Ended                   | Yes                    |
| Termination Interface: Style   | Crimp or Compression   |
| Wire Insulation Diameter       | 1.63mm max.            |
| Wire Size AWG                  | 22                     |
| Wire/Cable Type                | UL 11028               |
| Electrical                     |                        |
| Current - Maximum per Contact  | 3.0A                   |
| Voltage - Maximum              | 600V AC/DC             |
| Material Info                  |                        |
| Reference - Drawing Numbers    |                        |
| Sales Drawing                  | 2162731040-000         |

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

Green Image

REACH SVHC

Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free

Not Low-Halogen

Status

For more information, please visit Contact US

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

216273 Series

Mates With

SL Crimp Housing Versions A, G and D Only 70066 . SL Insulation Displacement Connector Assembly, Version G Housing 70400 . SL Single Row Receptacle, Version G 70430

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION