



Position switch Plastic enclosure 40 mm Twist lever, according to EN 50041 Device connection 1 x (M20 x 1.5) 1 NO/1 NC quick action contacts Rotary actuator right/left adjustable, Metal lever 27 mm long and plastic roller 19 mm

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Mechanical position switches
<b>product type designation</b>	3SE5
<b>manufacturer's article number</b>	
• of the supplied basic switch	3SE5132-0CA00
• of the supplied actuator head for position switches	3SE5000-0AH00
• of the supplied operating lever	3SE5000-0AA01
• of the supplied switching contacts	3SE5000-0CA00
• of the supplied empty enclosure with cover	3SE5132-0AA00
suitability for use safety switch	Yes
<b>General technical data</b>	
product function positive opening	Yes
insulation voltage rated value	400 V
<b>degree of pollution</b>	class 3
<b>surge voltage resistance rated value</b>	6 kV
<b>protection class IP</b>	IP66/IP67
<b>shock resistance</b>	
• acc. to IEC 60068-2-27	30g / 11 ms
vibration resistance acc. to IEC 60068-2-6	0.35 mm/5g
mechanical service life (switching cycles) typical	15 000 000
electrical endurance (switching cycles) at AC-15 at 230 V typical	100 000
<b>electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical</b>	10 000 000
<b>Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026</b>	6 000
<b>thermal current</b>	10 A
<b>material of the enclosure of the switch head</b>	plastic
<b>reference code acc. to IEC 81346-2</b>	B
<b>continuous current of the C characteristic MCB</b>	1 A; for a short-circuit current smaller than 400 A
<b>continuous current of the quick DIAZED fuse link</b>	10 A; for a short-circuit current smaller than 400 A
<b>continuous current of the DIAZED fuse link gG</b>	6 A
<b>active principle</b>	mechanical
<b>repeat accuracy</b>	0.05 mm
<b>minimum actuating torque in directions of actuation</b>	0.25 N·m
<b>length of the sensor</b>	127.5 mm
<b>width of the sensor</b>	40 mm

design of the switching contact	mechanical	
operating frequency rated value	50 ... 60 Hz	
number of NC contacts for auxiliary contacts	1	
number of NO contacts for auxiliary contacts	1	
<b>operational current at AC-15</b>		
• at 24 V rated value	6 A	
• at 125 V rated value	6 A	
• at 240 V rated value	6 A	
• at 400 V rated value	4 A	
<b>operational current at DC-13</b>		
• at 24 V rated value	3 A	
• at 125 V rated value	0.55 A	
• at 250 V rated value	0.27 A	
• at 400 V rated value	0.12 A	
design of the interface for safety-related communication	without	
<b>Enclosure</b>		
design of the housing	block, narrow	
material of the enclosure	plastic	
coating of the enclosure	Other types	
design of the housing acc. to standard	Yes	
<b>Drive Head</b>		
design of the actuating element	Twist lever, metal lever, 27 mm long, step 9 mm, plastic roller 19 mm	
standard-compliant actuator head	EN 50041, design A	
shape of the switch head	roller	
design of the switching function	positive opening	
circuit principle	snap-action contacts	
number of switching contacts safety-related	1	
<b>Connections/ Terminals</b>		
type of electrical connection	screw-type terminals	
type of connectable conductor cross-sections		
• solid	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 0.75 mm <sup>2</sup> )	
• finely stranded with core end processing	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 0.75 mm <sup>2</sup> )	
• at AWG cables solid	1x (20 ... 16), 2x (20 ... 18)	
• at AWG cables stranded	1x (20 ... 16), 2x (20 ... 18)	
cable entry type	1x (M20 x 1.5)	
<b>Communication/ Protocol</b>		
design of the interface	without	
<b>Ambient conditions</b>		
explosion protection category for dust	none	
<b>Installation/ mounting/ dimensions</b>		
mounting position	any	
fastening method	screw fixing	
<b>Certificates/ approvals</b>		
General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity



[Type Examination Certificate](#)



EG-Konf.

Declaration of Conformity

other

[Miscellaneous](#)

[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3SE5132-0CJ01>

Cax online generator


<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mfb=3SE5132-0CJ01>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5132-0CJ01>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3SE5132-0CJ01&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SE5132-0CJ01&lang=en)

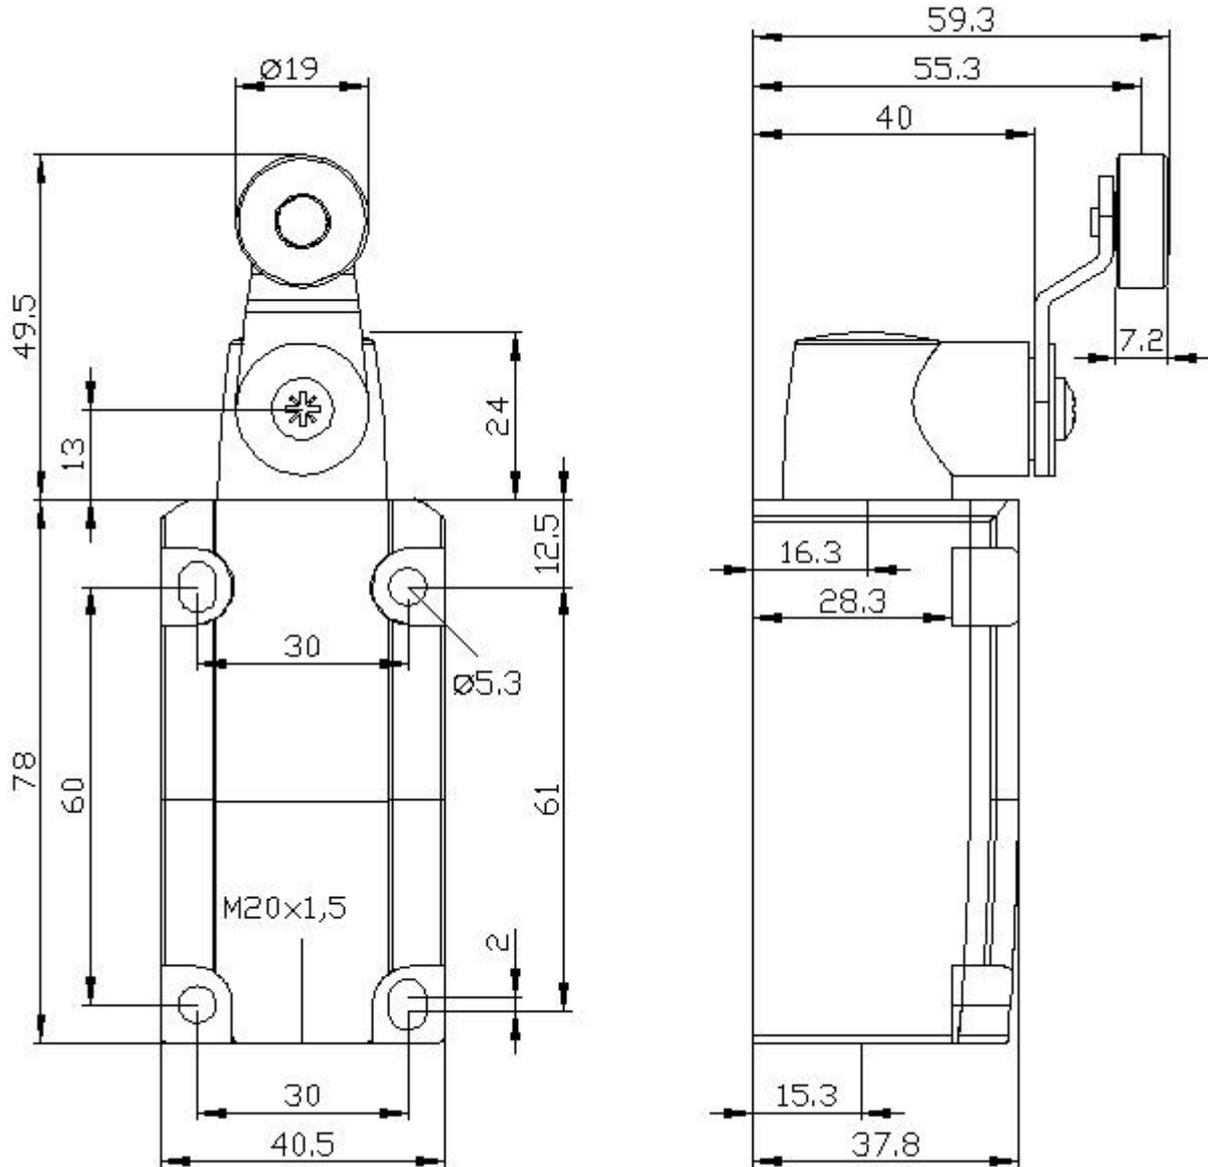



1	BN = Brown	→	21
2	WH = White	→	22
3	BU = Blue	→	13
4	BK = Black	→	14

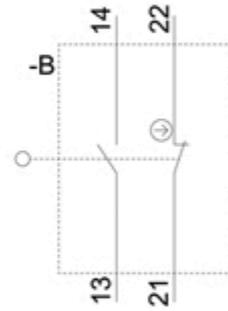

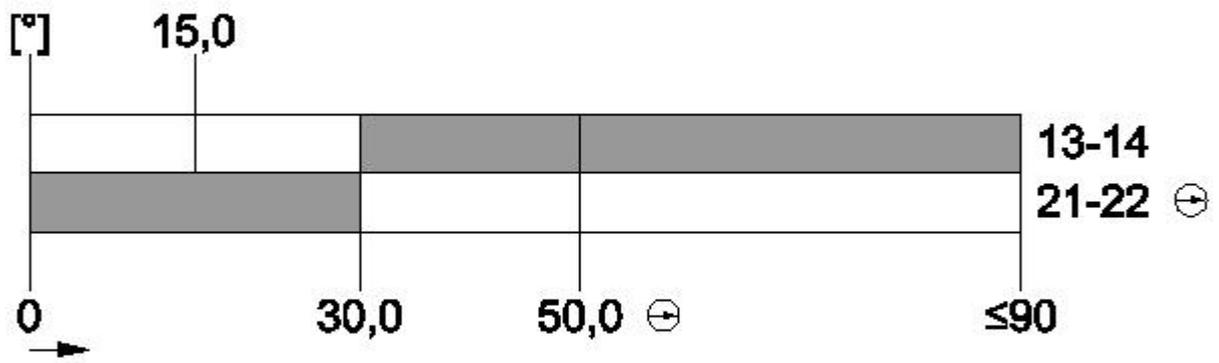

last modified:

8/31/2020 