



IN40-D0303K

IN4000 Standard

NON-CONTACT SAFETY SWITCHES

SICK
Sensor Intelligence.



Ordering information

Type	Part no.
IN40-D0303K	6027391

The devices conform to Category 3 as well as $\text{PFH}_D 1.0 \times 10^{-8}$. Please check whether the device meets the safety requirements of your application as a result. If you have any questions, please consult your sales organization.

Other models and accessories → www.sick.com/IN4000_Standard



Detailed technical data

Features

Sensor principle	Inductive
Number of safe outputs	1
Switching delay from state change	$T_2 + 20 \text{ ms}^{1)}$
Housing diameter	M18
Enable zone	3 mm ... 6 mm ²⁾
Safe switch off distance S_{ar}	15 mm ²⁾
Actuation directions	5
Active sensor surfaces	1
Monitoring time minimum dwell time	$\geq 0.2 \text{ s}$

¹⁾ During this time the output is switched off (Logical "0"), see response range.

²⁾ Dependent on material. The indicated values refer to steel ST37.

Safety-related parameters

Safety integrity level	SIL3 (IEC 61508) SILCL3 (EN 62061)
Category	Category 3 (EN ISO 13849)
Performance level	PL e (EN ISO 13849)
PFH_D (mean probability of a dangerous failure per hour)	1.0×10^{-8} (EN ISO 13849)
T_M (mission time)	10 years (EN ISO 13849) ¹⁾ 20 years (EN ISO 13849) ²⁾
Type	Type 3 (EN ISO 14119)
Actuator coding level	Uncoded (EN ISO 14119)

¹⁾ At -25°C ... $+70^\circ\text{C}$ and 5 % ... 95 % relative air humidity.

²⁾ At $+10^\circ\text{C}$... $+40^\circ\text{C}$ and 5 % ... 70 % relative air humidity.

**Classification in compliance with IEC/
EN 60947-5-3**

PDF-M

1) At -25 °C ... +70 °C and 5 % ... 95 % relative air humidity.

2) At +10 °C ... +40 °C and 5 % ... 70 % relative air humidity.

Functions

Safe series connection

With T-connector (without diagnostics)

Interfaces

Connection type

Plug connector, M12, 4-pin

Power indication

✓

Status display

✓

Electrical data

Protection class

III (EN 50178)

Supply voltage V_s

24 V DC (19.2 V DC ... 30 V DC)

Power consumption

15 mA

Type of output

Semiconductor, pulsed

Mechanical data

Design

Cylindrical

Housing diameter

M18

Housing length

90.5 mm

Thread length

55 mm

Weight

0.06 kg

Material

Housing

V4A (housing), PBT (cover)

Installation type

Non-flush

Ambient data

Enclosure rating

IP69K (IEC 60529)

Ambient operating temperature

-25 °C ... +70 °C

Storage temperature

-25 °C ... +70 °C

Vibration resistance

10 Hz ... 55 Hz, 1 mm (EN 60947-5-3)

Shock resistance

30 g, 11 ms (EN 60947-5-3)

Classifications

ECI@ss 5.0

27272401

ECI@ss 5.1.4

27272401

ECI@ss 6.0

27272401

ECI@ss 6.2

27272401

ECI@ss 7.0

27272401

ECI@ss 8.0

27272401

ECI@ss 8.1

27272401

ECI@ss 9.0

27272401

ECI@ss 10.0


27272401

ECI@ss 11.0


27272401

ETIM 5.0	EC001818
ETIM 6.0	EC001818
ETIM 7.0	EC001818
ETIM 8.0	EC001818
UNSPSC 16.0901	39122205

Dimensional drawing (Dimensions in mm (inch))


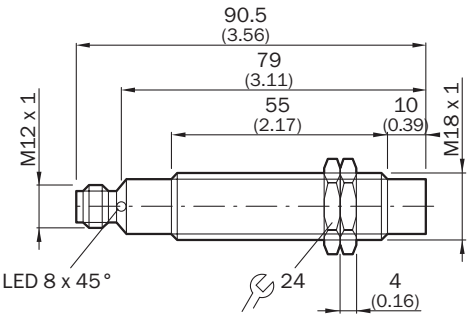


Response range

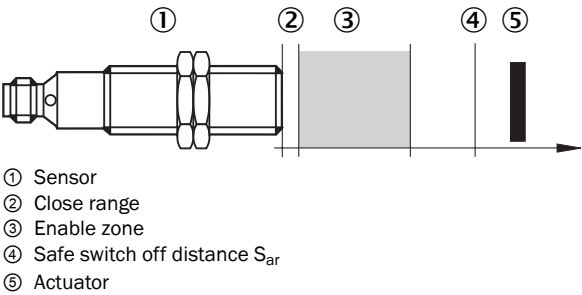

Pin assignment

Sensor connections

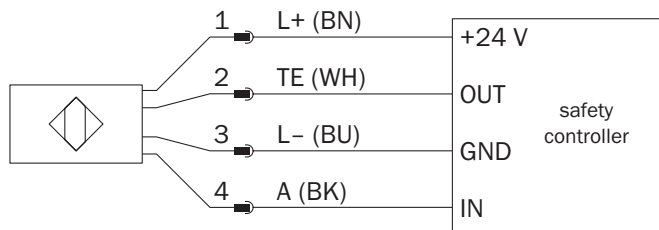

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com