

Low Noise 150 mA LDO Regulator

No. EA-258-180621

OUTLINE

The RP112x is a voltage regulator (LDO) with high output voltage accuracy, low-supply current, low On-resistance transistor, low noise output voltage and high ripple rejection. Each IC is composed of the followings: a voltage reference unit, an error amplifier, a resistor-net for output voltage setting, a current limit circuit, and a chip enable circuit.

The RP112x features ultra-low noise and its Ripple Rejection is as low as 80 dB at $f = 1$ kHz, 75 dB at $f = 10$ kHz and 65 dB at $f = 100$ kHz. The Output Noise is also as low as Typ. $10 \mu\text{V}_{\text{rms}}$. It is kept the low level at any Output Voltage. RP112x is suitable for the power source for the portable music player and RF module that demands for higher level of noise reduction. SOT-23-5 and SC-88A packages, a 1-mm square DFN(PLP)1010-4 package are available.

FEATURES

- Supply Current Typ. 75 μ A
- Standby Current..... Typ. 0.1 μ A
- Dropout Voltage Typ. 0.20 V ($I_{OUT} = 150$ mA, $V_{OUT} = 2.8$ V)
- Ripple Rejection..... Typ. 80 dB ($f = 1$ kHz)
Typ. 75 dB ($f = 10$ kHz)
Typ. 65 dB ($f = 100$ kHz)
- Output Voltage Accuracy..... $\pm 1.0\%$
- Output Voltage Temperature Coefficient..... Typ. ± 30 ppm/ $^{\circ}$ C
- Line Regulation Typ. 0.02%/V
- Packages DFN(PLP)1010-4, SC-88A, SOT-23-5
- Input Voltage Range 2.0 V to 5.25 V
- Output Voltage Range..... 1.2 V to 4.8 V (0.1 V step)
- Short Current Limit..... Typ. 40 mA
- Built-in Foldback Protection Circuit
- Output Noise Typ. 10 μ Vrms
- Ceramic capacitors are recommended to be used with this IC 1.0 μ F or more

APPLICATIONS

- Power source for portable communication equipment.
- Power source for electrical appliances such as cameras, VCRs and camcorders.
- Power source for battery-powered equipments.
- Power source for electrical home appliances.
- Power source for the portable music player
- Power source for RF module

SELECTION GUIDE

The output voltage, auto-discharge function⁽¹⁾, package for the ICs can be selected at the user's request.

Selection Guide

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
RP112Kxx1*-TR	DFN(PLP)1010-4	10,000 pcs	Yes	Yes
RP112Qxx2*-TR-FE	SC-88A	3,000 pcs	Yes	Yes
RP112Nxx1*-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes

xx: Set output voltage (V_{SET}) is selectable from 1.2 V to 4.8 V in 0.1 V step.

The second decimal point of the voltage is described as below.

1.25 V: RP112x12x*5

1.85 V: RP112x18x*5


2.85 V: RP112x28x*5

*: Selections of CE pin polarity and Auto-discharge function are as shown below:


(B) CE pin polarity: "H" active, Auto-discharge function: No

(D) CE pin polarity: "H" active, Auto-discharge function: Yes

BLOCK DIAGRAMS

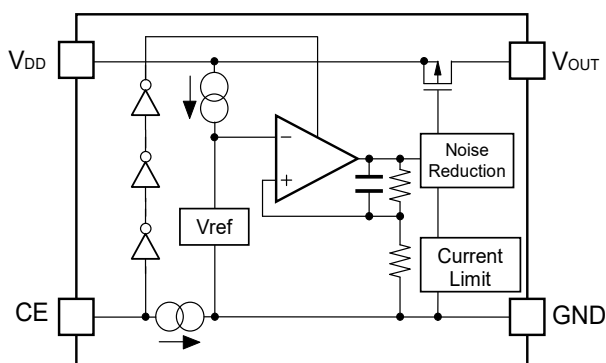


RP112xxxxB Block Diagram

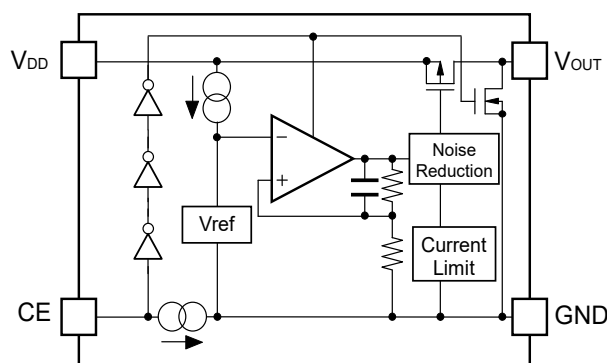



RP112xxxxD Block Diagram

⁽¹⁾ Auto-discharge function quickly lowers the output voltage to 0 V by releasing the electrical charge in the external capacitor when the chip enable signal is switched from the active mode to the standby mode.


PIN DESCRIPTIONS



DFN(PLP)1010-4 Pin Configuration



SC-88A Pin Configuration



SOT-23-5 Pin Configuration

DFN(PLP)1010-4 Pin Description

Pin No.	Symbol	Description
1	V_{OUT}	Output Pin
2	GND	Ground Pin
3	CE	Chip Enable Pin ("H" Active)
4	V_{DD}	Input Pin

SC-88A Pin Description

Pin No	Symbol	Pin Description
1	V_{DD}	Input Pin
2	GND	Ground Pin
3	CE	Chip Enable Pin ("H" Active)
4	NC	No Connection
5	V_{OUT}	Output Pin

SOT-23-5 Pin Description

Pin No	Symbol	Pin Description
1	V_{DD}	Input Pin
2	GND	Ground Pin
3	CE	Chip Enable Pin ("H" Active)
4	NC	No Connection
5	V_{OUT}	Output Pin

(1) Tab is GND level (They are connected to the reverse side of this IC). The tab is better to be connected to the GND, but leaving it open is also acceptable.

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings

Symbol	Item			Rating	Unit
V_{IN}	Input Voltage			6.0	V
V_{CE}	Input Voltage (CE Pin)			6.0	V
V_{OUT}	Output Voltage			-0.3 to $V_{IN} + 0.3$	V
I_{OUT}	Output Current			180	mA
P_D	Power Dissipation ⁽¹⁾	(DFN(PLP)1010-4)	JEDEC STD. 51-7 Test Land Pattern	800	mW
		SC-88A	Standard Test Land Pattern	380	
		SOT-23-5	JEDEC STD. 51-7 Test Land Pattern	660	
T_j	Junction Temperature Range			-40 to 125	°C
T_{stg}	Storage Temperature Range			-55 to 125	°C

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING CONDITIONS

Recommended Operating Conditions

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	2.0 to 5.25	V
T_a	Operating Temperature	-40 to 85	°C

RECOMMENDED OPERATING CONDITIONS

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

⁽¹⁾ Refer to *POWEWR DISSIPATION* for detailed information.

ELECTRICAL CHARACTERISTICS

Unless otherwise noted, $V_{IN} = 5.25\text{ V}$ ($V_{OUT} \geq 4.1\text{ V}$), $V_{IN} = \text{Set } V_{OUT} + 1.0\text{ V}$ ($1.5\text{ V} < V_{OUT} < 4.1\text{ V}$),
 $V_{IN} = 2.5\text{ V}$ ($V_{OUT} \leq 1.5\text{ V}$), $I_{OUT} = 1\text{ mA}$, $C_{IN} = C_{OUT} = 1.0\text{ }\mu\text{F}$

The specifications surrounded by are guaranteed by design engineering at $-40^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$.

RP112xxxxB/D Electrical Characteristics

($T_a = 25^{\circ}\text{C}$)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage	$T_a = 25^{\circ}\text{C}$	$V_{OUT} \geq 2.0\text{ V}$	x0.99	x1.01	V
			$V_{OUT} < 2.0\text{ V}$	-20	+20	mV
		$-40^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$	$V_{OUT} \geq 2.0\text{ V}$	x0.985	x1.015	V
			$V_{OUT} < 2.0\text{ V}$	-30	+30	mV
I_{OUT}	Output Current		150			mA
$\Delta V_{OUT}/\Delta I_{OUT}$	Load Regulation	$1\text{ mA} \leq I_{OUT} \leq 150\text{ mA}$	-14	0	14	mV
V_{DIF}	Dropout Voltage	Refer to <i>Product-specific Electrical Characteristics</i>				
I_{SS}	Supply Current	$I_{OUT} = 0\text{ mA}$	$V_{OUT} \geq 4.1\text{ V}$		80	μA
			$V_{OUT} < 4.1\text{ V}$		75	
$I_{standby}$	Standby Current	$V_{CE} = 0\text{ V}$		0.1	1.0	μA
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation	$\text{Set } V_{OUT} + 0.3\text{ V} \leq V_{IN} \leq 5.25\text{ V}$	$V_{OUT} \geq 4.1\text{ V}$	0.02	0.10	% / V
		$\text{Set } V_{OUT} + 0.5\text{ V} \leq V_{IN} \leq 5.0\text{ V}$	$1.7\text{ V} \leq V_{OUT} < 4.1\text{ V}$			
		$2.2\text{ V} \leq V_{IN} \leq 5.0\text{ V}$	$V_{OUT} < 1.7\text{ V}$			
RR	Ripple Rejection	Ripple 0.2 Vp-p, $I_{OUT} = 30\text{ mA}$, $V_{IN} = 5.25\text{ V}$ ($V_{OUT} \geq 4.1\text{ V}$), $V_{IN} = \text{Set } V_{OUT} + 1.0\text{ V}$ ($V_{OUT} < 4.1\text{ V}$)	$f = 1\text{ kHz}$		80	dB
			$f = 10\text{ kHz}$		75	
			$f = 100\text{ kHz}$		65	
V_{IN}	Input Voltage ⁽¹⁾		2.0		5.25	V
$\Delta V_{OUT}/\Delta T_a$	Output Voltage Temperature Coefficient	$-40^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$		± 30		ppm / $^{\circ}\text{C}$
I_{SC}	Short Current Limit	$V_{OUT} = 0\text{ V}$		40		mA
I_{PD}	CE Pull-down Current			0.3	0.6	μA
V_{CEH}	CE Input Voltage "H"		1.0			V
V_{CEL}	CE Input Voltage "L"				0.4	V

All test categories were tested on the products under the pulse load condition ($T_j \approx T_a = 25^{\circ}\text{C}$) except Output Noise, Ripple Rejection, and Output Voltage Temperature Coefficient.

⁽¹⁾ The maximum input voltage (Electrical Characteristics) is 5.25 V. If, for any reason the maximum input voltage exceeds 5.25 V, it has to be no more than 5.5 V with 500 hrs of the total operating time.

RP112x

No. EA-258-180621

ELECTRICAL CHARACTERISTICS (continued)Unless otherwise noted, $V_{IN} = 5.25\text{ V}$ ($V_{OUT} \geq 4.1\text{ V}$), $V_{IN} = \text{Set } V_{OUT} + 1.0\text{ V}$ ($1.5\text{ V} < V_{OUT} < 4.1\text{ V}$), $V_{IN} = 2.5\text{ V}$ ($V_{OUT} \leq 1.5\text{ V}$), $I_{OUT} = 1\text{ mA}$, $C_{IN} = C_{OUT} = 1.0\text{ }\mu\text{F}$ The specifications surrounded by are guaranteed by design engineering at $-40^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$.**RP112xxxxB/D Electrical Characteristics**

(Ta = 25°C)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
en	Output Noise	BW = 10 Hz to 100 kHz, $I_{OUT} = 30\text{ mA}$		10		μV_{rms}
R_{LOW}	Auto-discharge Nch Tr. ON Resistance (RP112xxxxD only)	$V_{IN} = 4.0\text{ V}$, $V_{CE} = 0\text{ V}$		60		Ω

All test categories were tested on the products under the pulse load condition ($T_j \approx T_a = 25^{\circ}\text{C}$) except Output Noise, Ripple Rejection, and Output Voltage Temperature Coefficient.


The specifications surrounded by are guaranteed by design engineering at $-40^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$.

Product-specific Electrical Characteristics

Product Name	V _{OUT}						V _{DIF}	
	Ta = 25°C			-40°C ≤ Ta ≤ 85°C			Ta = 25°C	
	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.	Max.
RP112x12xx	1.180	1.20	1.220	1.170	1.20	1.230	0.39	0.80
RP112x12xx5	1.230	1.25	1.270	1.220	1.25	1.280	0.39	0.80
RP112x13xx	1.280	1.30	1.320	1.270	1.30	1.330	0.37	0.70
RP112x14xx	1.380	1.40	1.420	1.370	1.40	1.430	0.34	0.60
RP112x15xx	1.480	1.50	1.520	1.470	1.50	1.530	0.32	0.50
RP112x16xx	1.580	1.60	1.620	1.570	1.60	1.630	0.32	0.50
RP112x17xx	1.680	1.70	1.720	1.670	1.70	1.730	0.29	0.41
RP112x18xx	1.780	1.80	1.820	1.770	1.80	1.830	0.29	0.41
RP112x18xx5	1.830	1.85	1.870	1.820	1.85	1.880	0.29	0.41
RP112x19xx	1.880	1.90	1.920	1.870	1.90	1.930	0.29	0.41
RP112x20xx	1.980	2.00	2.020	1.970	2.00	2.030	0.25	0.36
RP112x21xx	2.079	2.10	2.121	2.069	2.10	2.132	0.25	0.36
RP112x22xx	2.178	2.20	2.222	2.167	2.20	2.233	0.25	0.36
RP112x23xx	2.277	2.30	2.323	2.266	2.30	2.335	0.25	0.36
RP112x24xx	2.376	2.40	2.424	2.364	2.40	2.436	0.25	0.36
RP112x25xx	2.475	2.50	2.525	2.463	2.50	2.538	0.22	0.31
RP112x26xx	2.574	2.60	2.626	2.561	2.60	2.639	0.22	0.31
RP112x27xx	2.673	2.70	2.727	2.660	2.70	2.741	0.22	0.31
RP112x28xx	2.772	2.80	2.828	2.758	2.80	2.842	0.20	0.28
RP112x28xx5	2.822	2.85	2.879	2.807	2.85	2.893	0.20	0.28
RP112x29xx	2.871	2.90	2.929	2.857	2.90	2.944	0.20	0.28
RP112x29xx5	2.921	2.95	2.980	2.906	2.95	2.994	0.20	0.28
RP112x30xx	2.970	3.00	3.030	2.955	3.00	3.045	0.20	0.28
RP112x31xx	3.069	3.10	3.131	3.054	3.10	3.147	0.20	0.28
RP112x31xx5	3.119	3.15	3.182	3.103	3.15	3.197	0.20	0.28
RP112x32xx	3.168	3.20	3.232	3.152	3.20	3.248	0.20	0.28
RP112x33xx	3.267	3.30	3.333	3.251	3.30	3.350	0.20	0.28
RP112x34xx	3.366	3.40	3.434	3.349	3.40	3.451	0.20	0.28
RP112x35xx	3.465	3.50	3.535	3.448	3.50	3.553	0.20	0.28
RP112x36xx	3.564	3.60	3.636	3.546	3.60	3.654	0.20	0.28
RP112x37xx	3.663	3.70	3.737	3.645	3.70	3.756	0.20	0.28
RP112x38xx	3.762	3.80	3.838	3.743	3.80	3.857	0.20	0.28
RP112x39xx	3.861	3.90	3.939	3.842	3.90	3.959	0.20	0.28
RP112x40xx	3.960	4.00	4.040	3.940	4.00	4.060	0.20	0.28
RP112x41xx	4.059	4.10	4.141	4.039	4.10	4.162	0.20	0.28
RP112x42xx	4.158	4.20	4.242	4.137	4.20	4.263	0.20	0.28
RP112x43xx	4.257	4.30	4.343	4.236	4.30	4.365	0.20	0.28
RP112x44xx	4.356	4.40	4.444	4.334	4.40	4.466	0.20	0.28
RP112x45xx	4.455	4.50	4.545	4.433	4.50	4.568	0.20	0.28
RP112x46xx	4.554	4.60	4.646	4.531	4.60	4.669	0.20	0.28
RP112x47xx	4.653	4.70	4.747	4.630	4.70	4.771	0.20	0.28
RP112x48xx	4.752	4.80	4.848	4.728	4.80	4.872	0.20	0.28

APPLICATION INFORMATION

TYPICAL APPLICATIONS

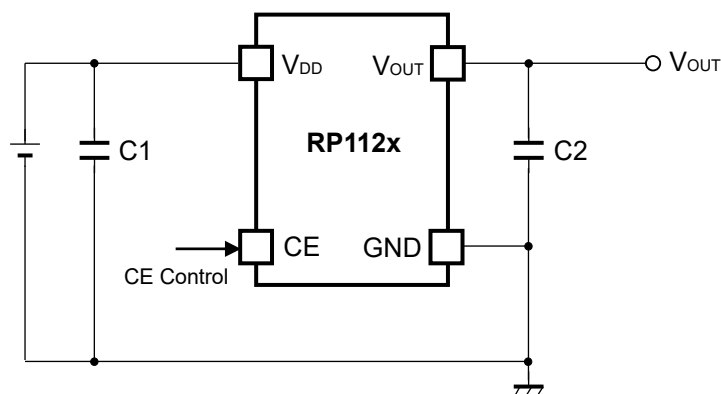

External Components

Symbol	Description
C1 (C _{IN})	1.0 μ F, Ceramic Capacitor, GRM155B31A105KE15, MURATA
C2 (C _{OUT})	1.0 μ F, Ceramic Capacitor, GRM155B31A105KE15, MURATA

TECHNICAL NOTES

Phase Compensation

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, use a 1.0 μ F or more capacitor C2.

In case of using a tantalum capacitor, the output may be unstable due to inappropriate ESR. Therefore, the full range of operating conditions for the capacitor in the application should be considered.

PCB Layout

The high impedances of V_{DD} and GND could be a reason for the noise pickup and unstable operation. Therefore, it is imperative that the impedances of V_{DD} and GND be the lowest possible. Also, place a 1.0 μ F or more capacitor (C1) between V_{DD} pin and GND pin as close as possible to each other.


As for C2 output capacitor that is used for phase compensation, place it between V_{OUT} pin and GND as close as possible to each other (Refer to *TYPICAL APPLICATIONS*).

TYPICAL CHARACTERISTICS


Typical Characteristics are intended to be used as reference data; they are not guaranteed.

1) Output Voltage vs. Output Current (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, Ta = 25°C)


RP112x12xx

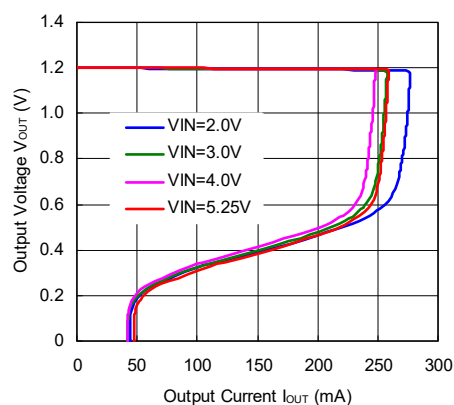


RP112x28xx

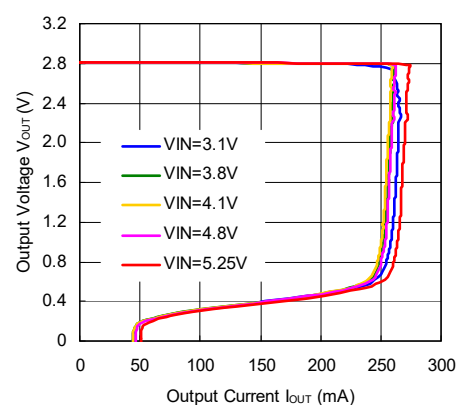

RP112x40xx

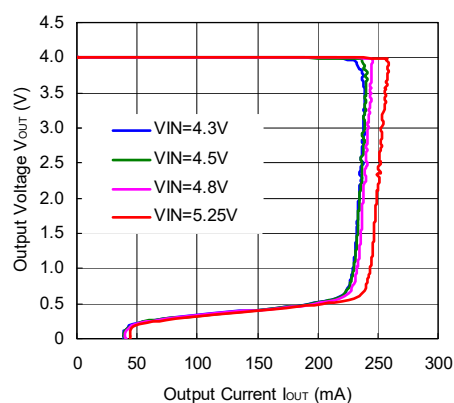


RP112x48xx

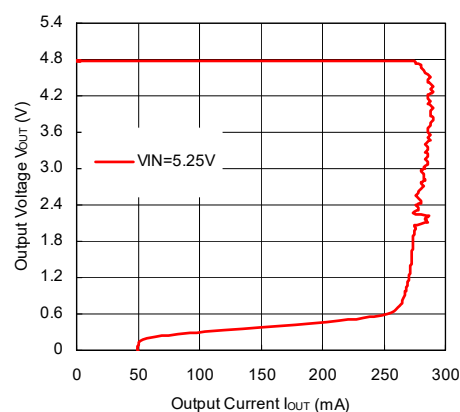


2) Output Voltage vs. Input Voltage (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, Ta = 25°C)


RP112x12xx

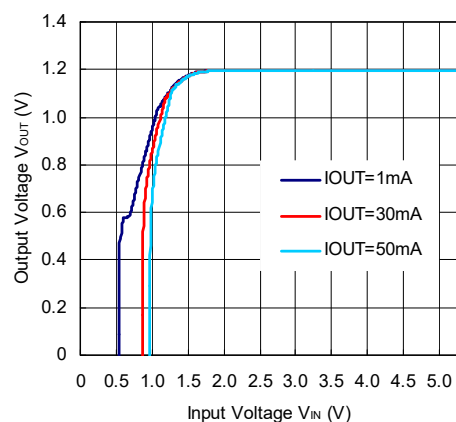


RP112x28xx

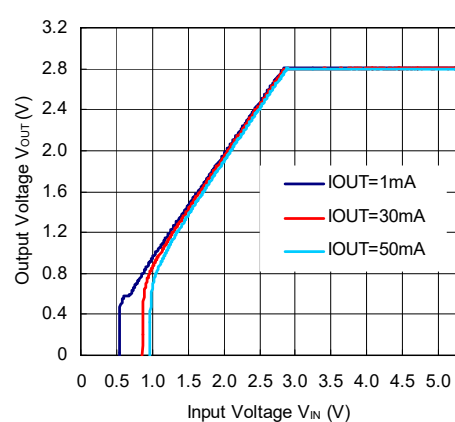

RP112x40xx

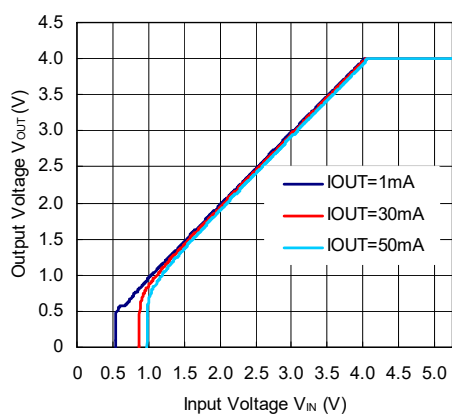


RP112x48xx

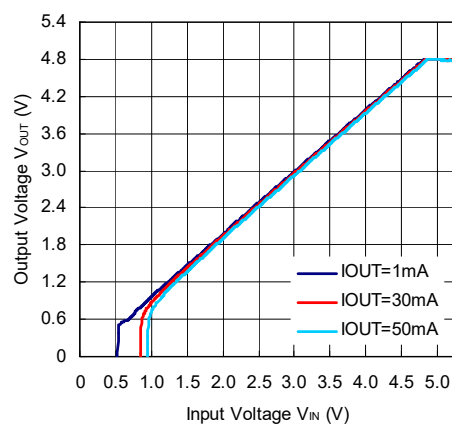


3) Supply Current vs. Input Voltage ($C1 = \text{Ceramic } 1.0 \mu\text{F}$, $C2 = \text{Ceramic } 1.0 \mu\text{F}$, $T_a = 25^\circ\text{C}$)


RP112x12xx

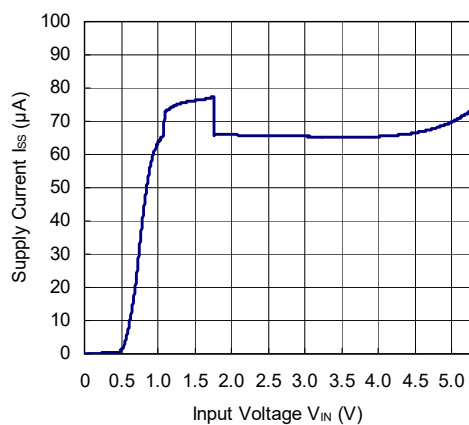


RP112x28xx

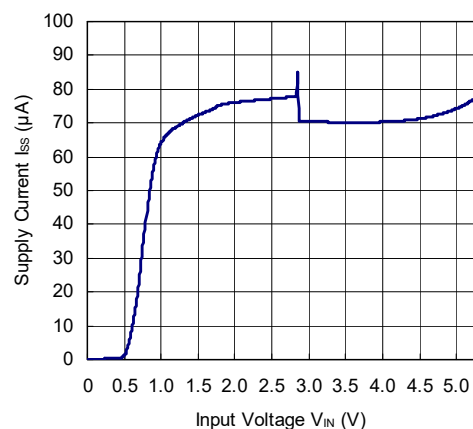

RP112x40xx

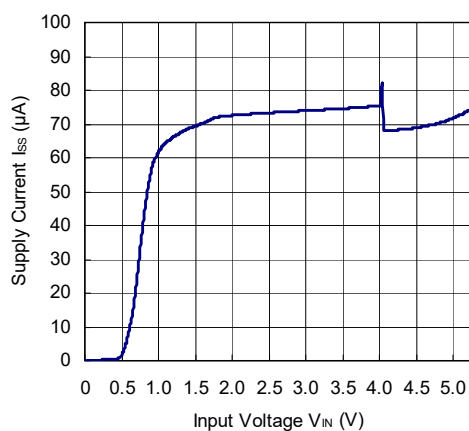


RP112x48xx

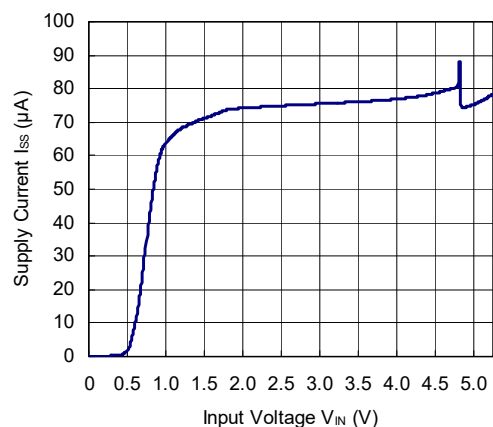


4) Output Voltage vs. Temperature (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, $I_{OUT} = 1$ mA)


RP112x12xx

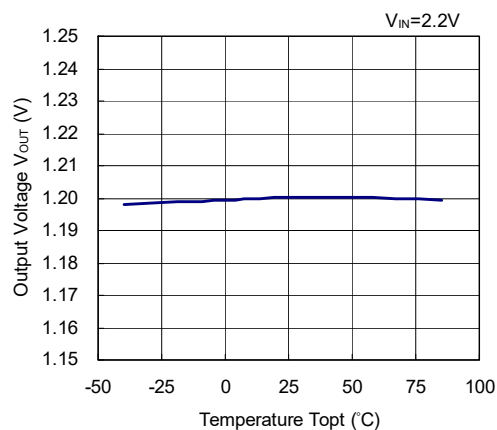


RP112x28xx

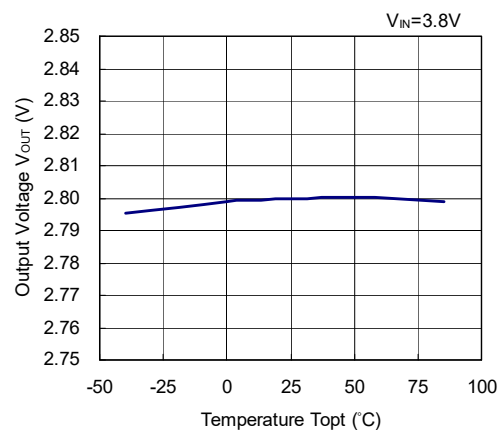

RP112x40xx

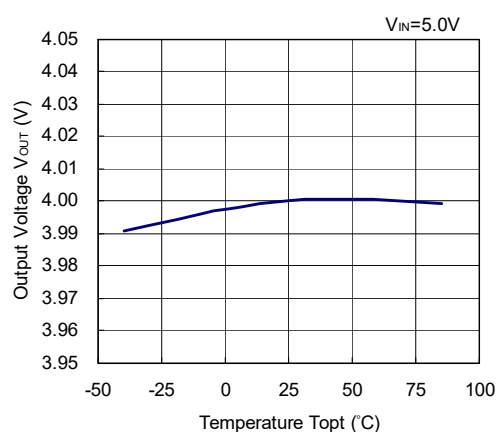


RP112x48xx

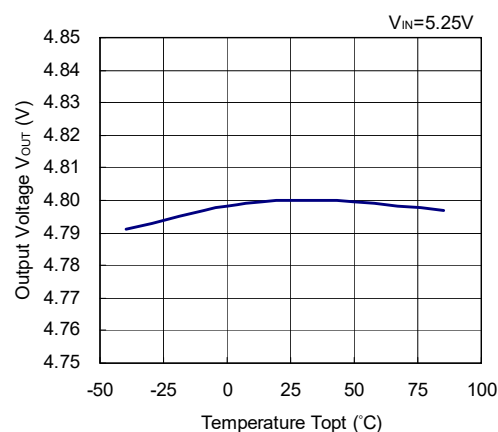








5) Supply Current vs. Temperature (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, $I_{OUT} = 0$ mA)

RP112x12xx

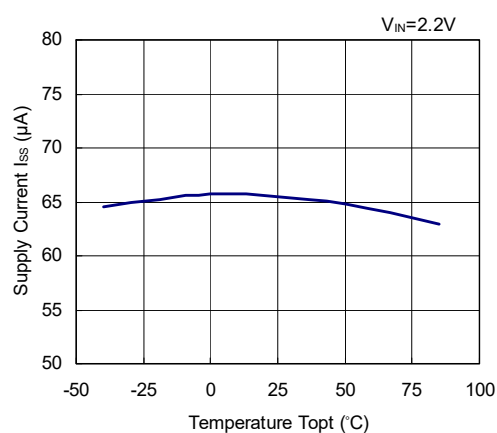


RP112x28xx

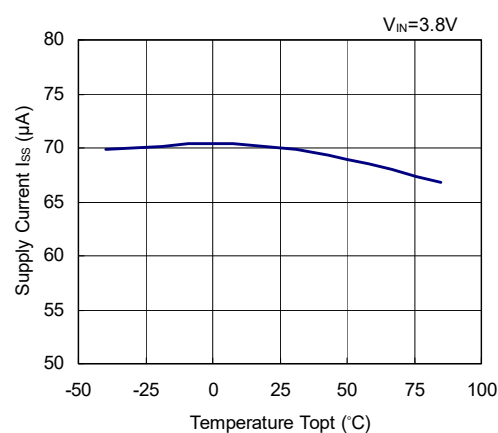

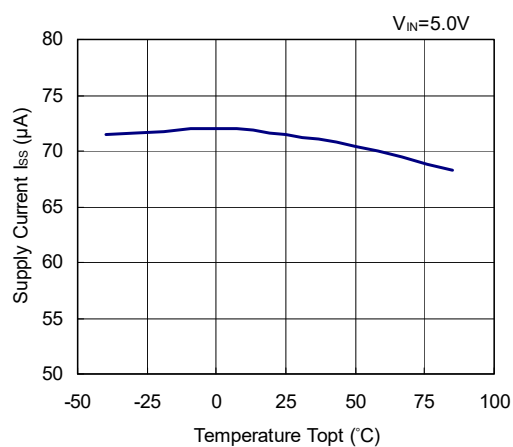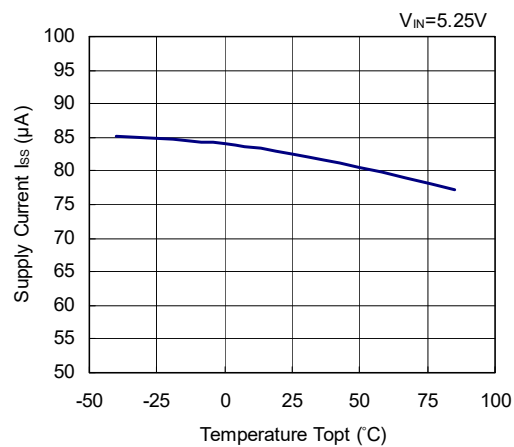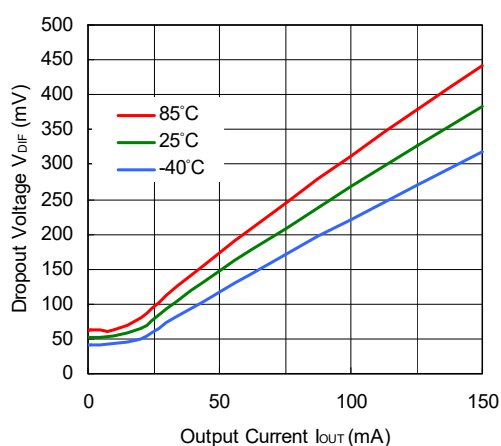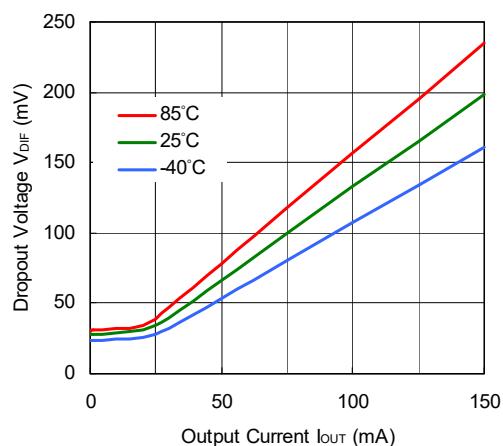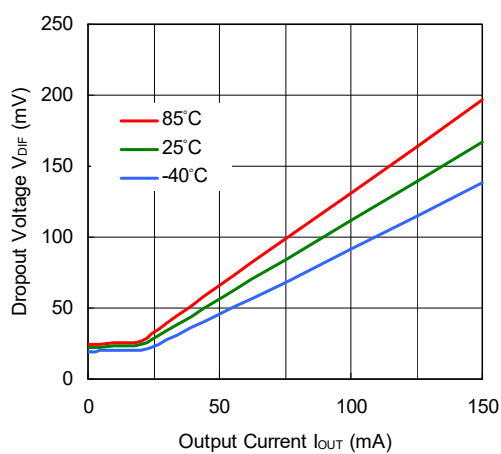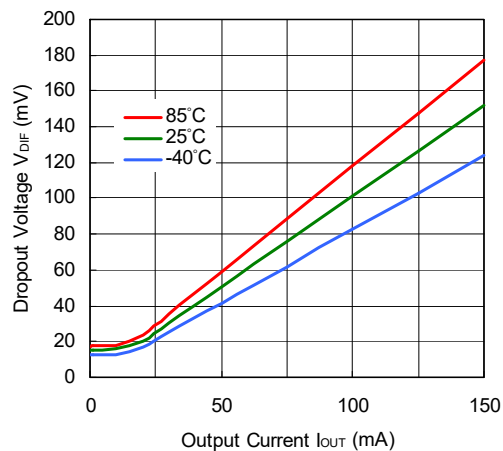
RP112x40xx**RP112x48xx****6) Dropout Voltage vs. Output Current ($C1$ = Ceramic $1.0\ \mu F$, $C2$ = Ceramic $1.0\ \mu F$)****RP112x12xx****RP112x28xx****RP112x40xx****RP112x48xx**

7) Dropout Voltage vs. Set Output Voltage (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, Ta = 25°C)

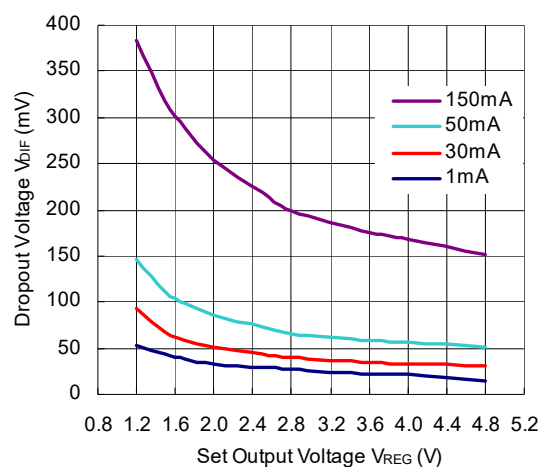


8) Dropout Voltage vs. Temperature (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F)


RP112x12xx

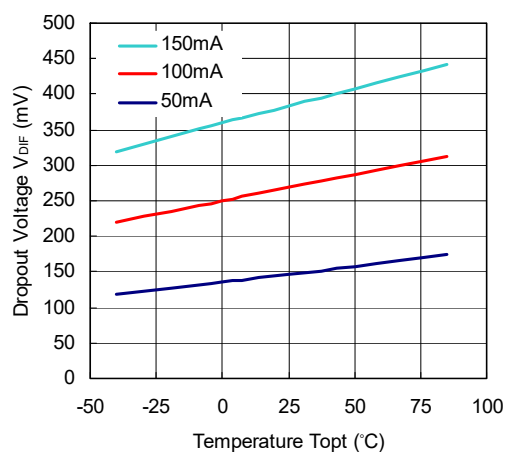


RP112x28xx






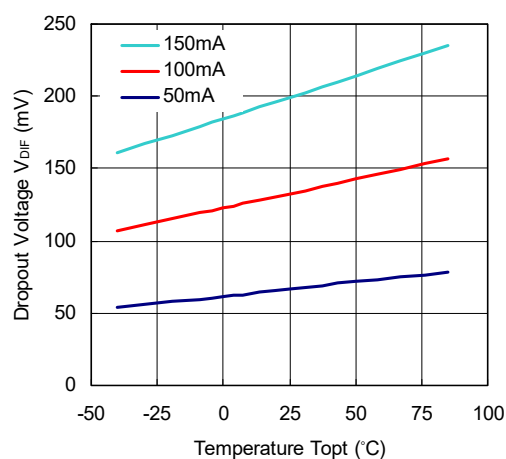


RP112x40xx

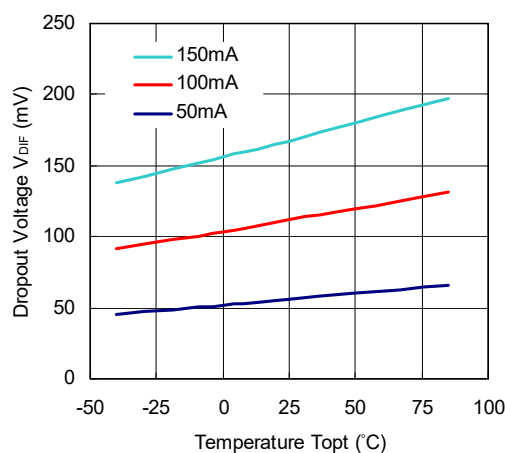


RP112x48xx

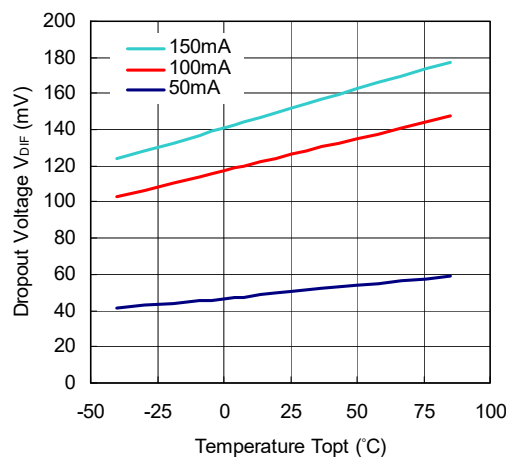


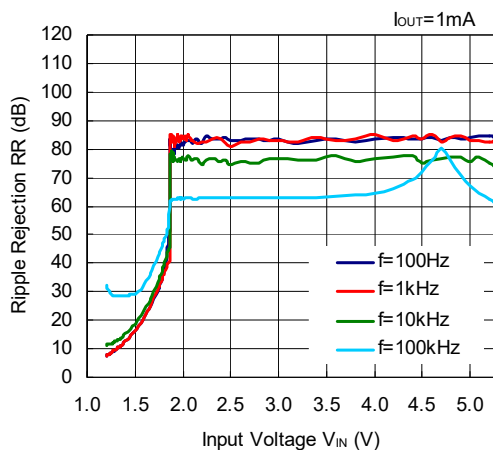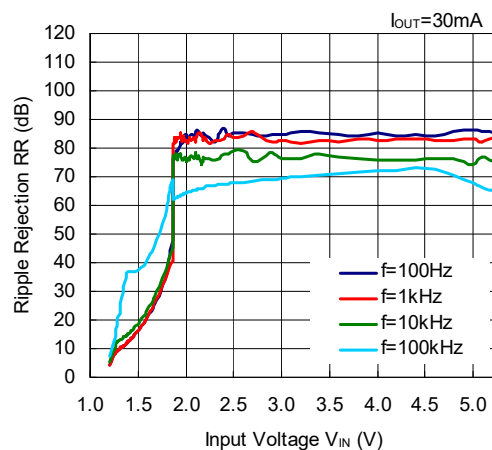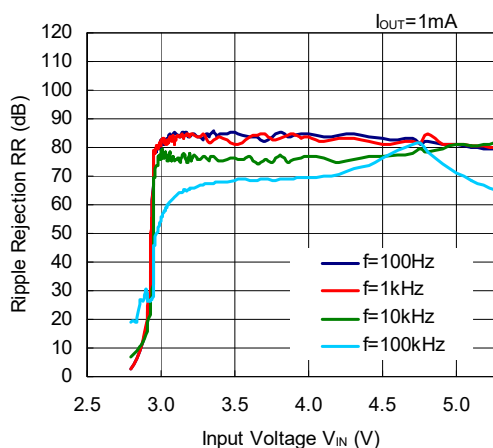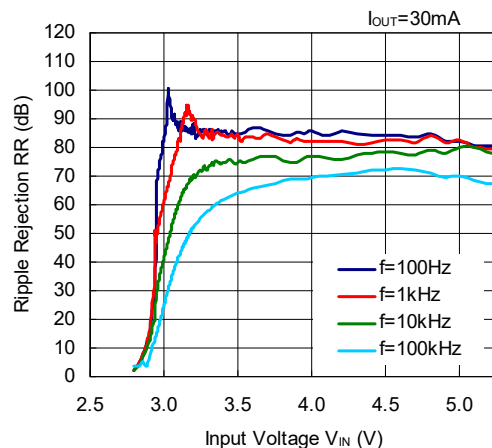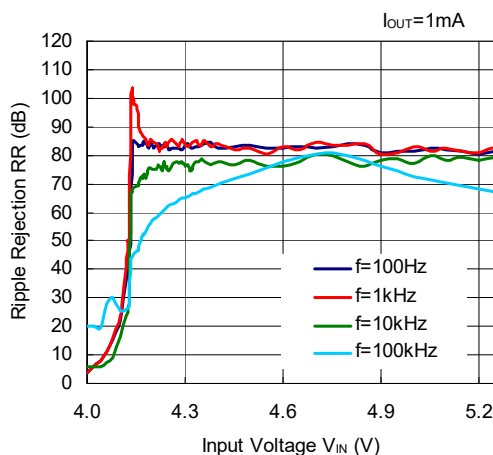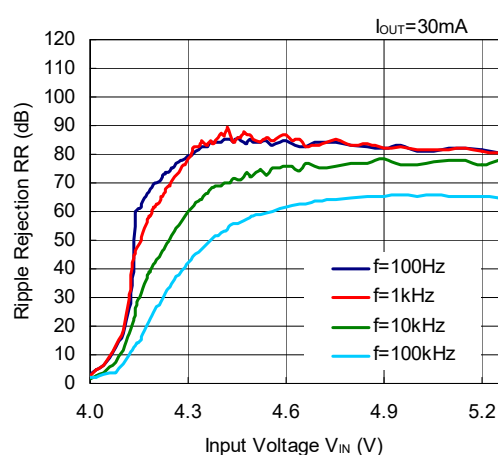9) Ripple Rejection vs. Input Voltage (C1 = none, C2 = Ceramic 1.0 μ F, Ripple = 0.2 Vp-p, Ta = 25°C)**RP112x12xx****RP112x12xx****RP112x28xx****RP112x28xx****RP112x40xx****RP112x40xx**

10) Ripple Rejection vs. Output Current (C1 = none, C2 = Ceramic 1.0 μ F, Ripple = 0.2 Vp-p, Ta = 25°C)

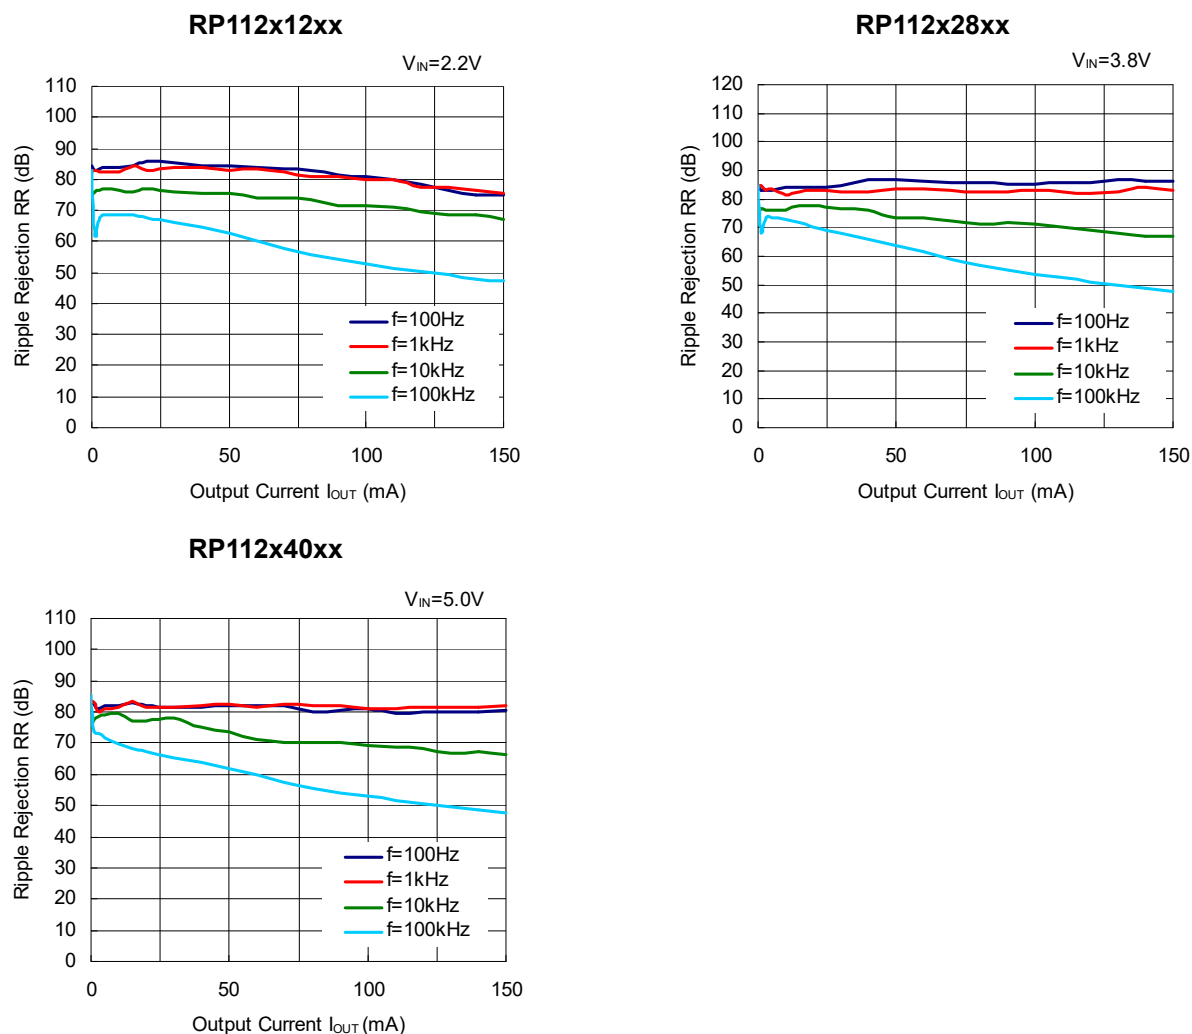


11) Ripple Rejection vs. Frequency (C1 = none, C2 = Ceramic 1.0 μ F, Ripple = 0.2 Vp-p, Ta = 25°C)

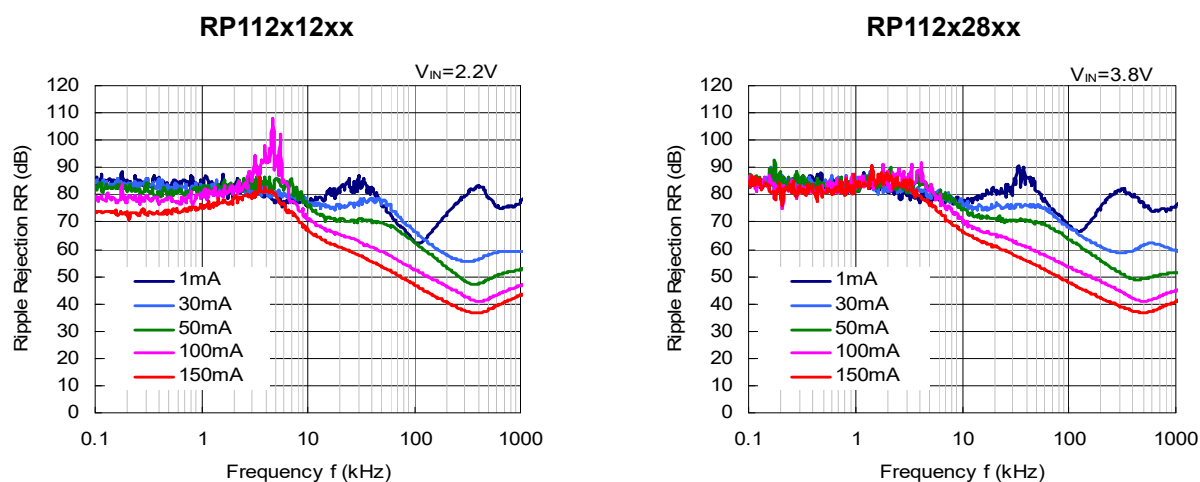

RP112x


No. EA-258-180621

RP112x40xx

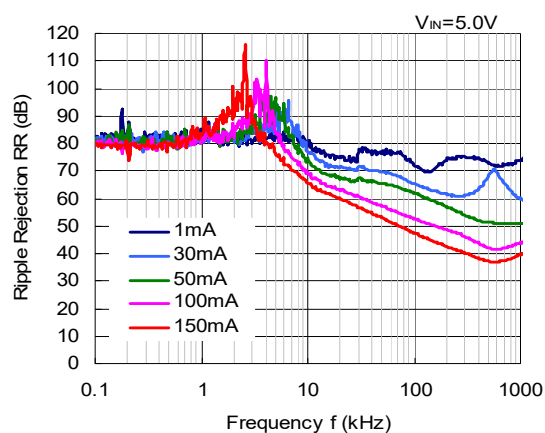


12) Output Spectral Noise Density vs. Frequency (C1 = none, C2 = Ceramic 1.0 μ F, T_a = 25°C)


RP112x12xx

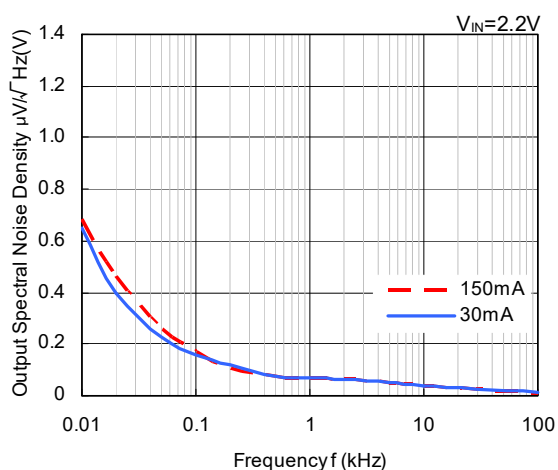


RP112x28xx

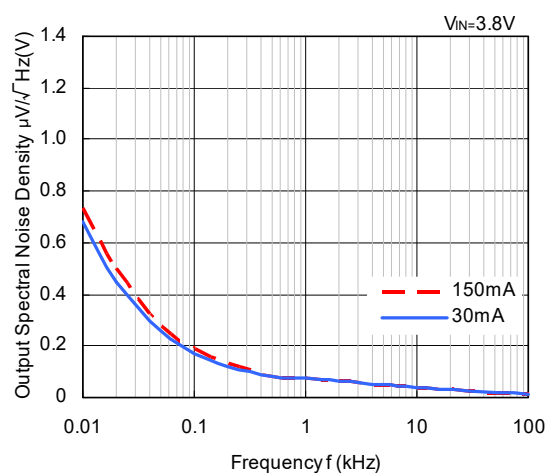





RP112x40xx

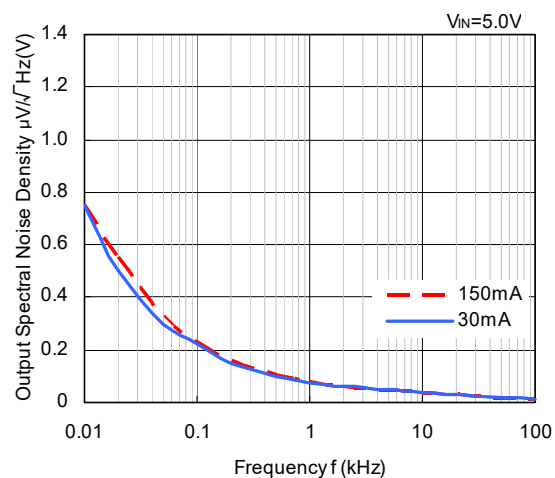



RP112x48xx

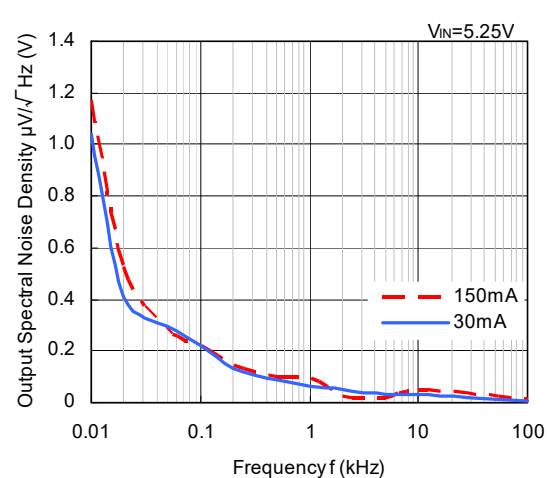


13) Input Transient Response (C1 = none, C2 = Ceramic 1.0 μ F, $I_{OUT} = 30$ mA, $t_r = t_f = 5.0$ μ s, $T_a = 25^\circ$ C)

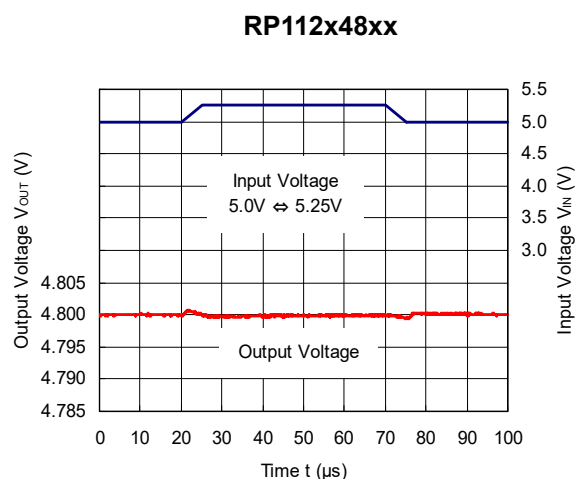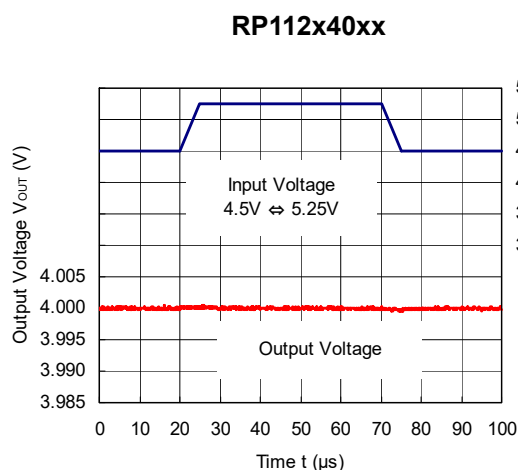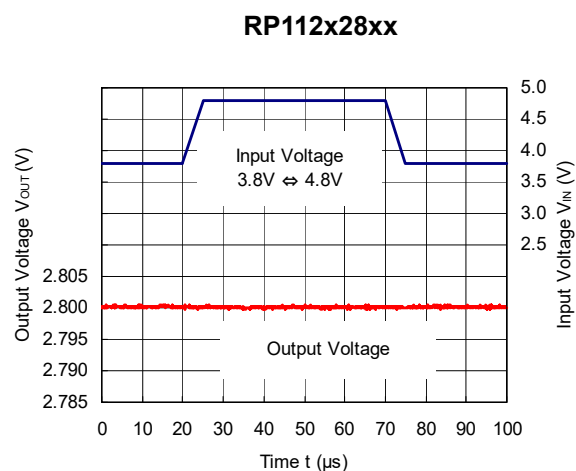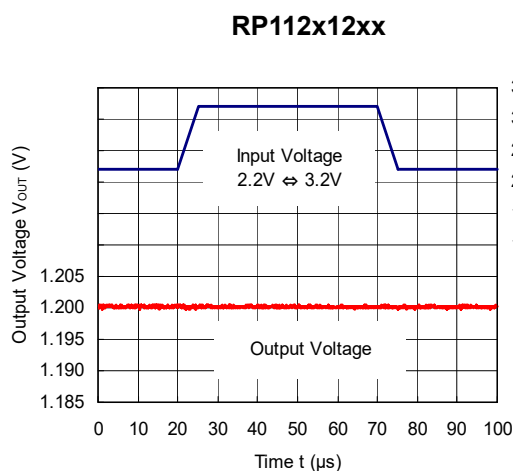


14) Load Transient Response (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, $t_r = t_f = 0.5$ μ s, $T_a = 25^\circ$ C)

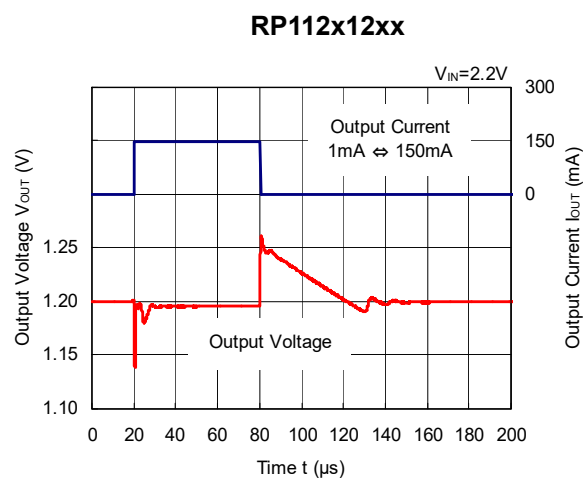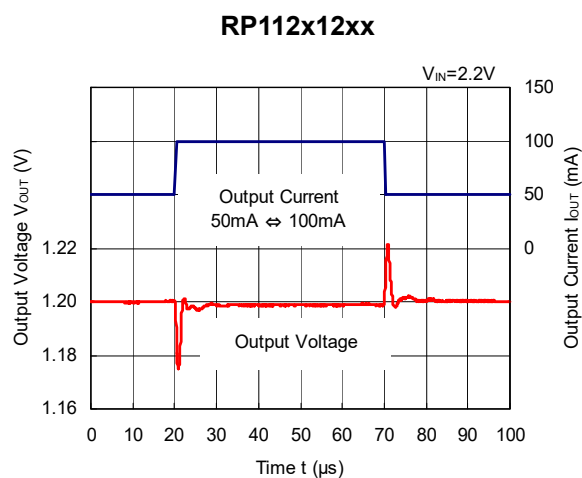


RP112x28xx

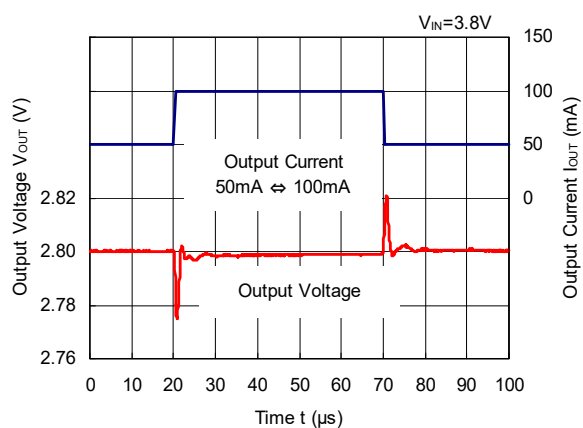


RP112x28xx

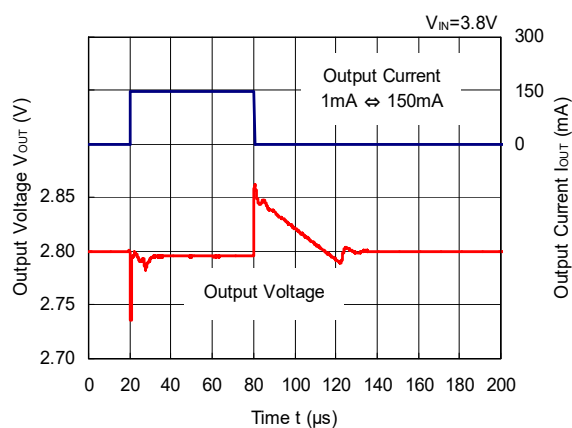


RP112x40xx

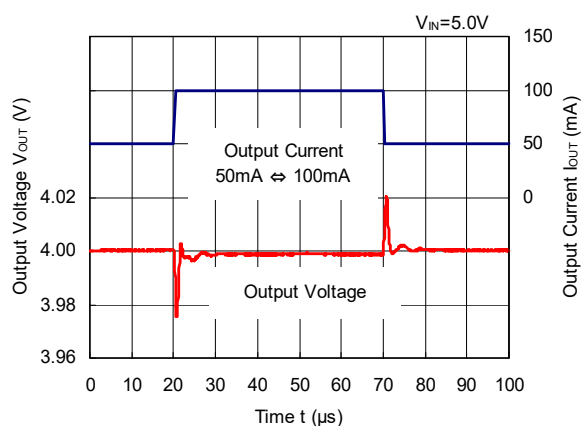


RP112x40xx

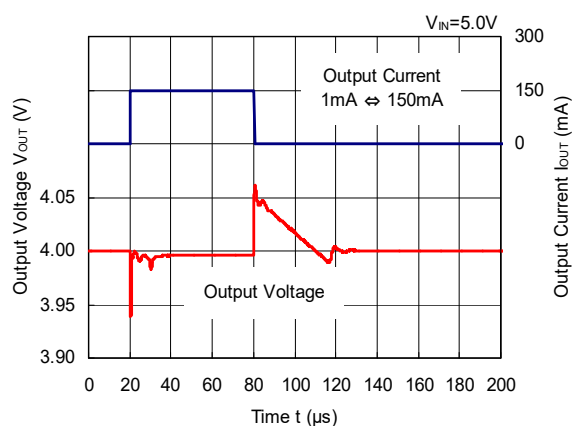

RP112x48xx

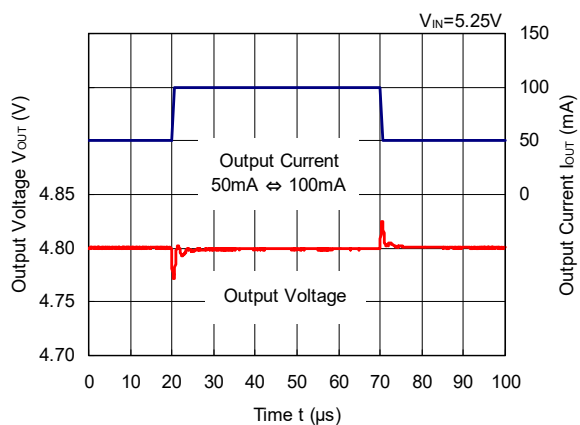


RP112x48xx

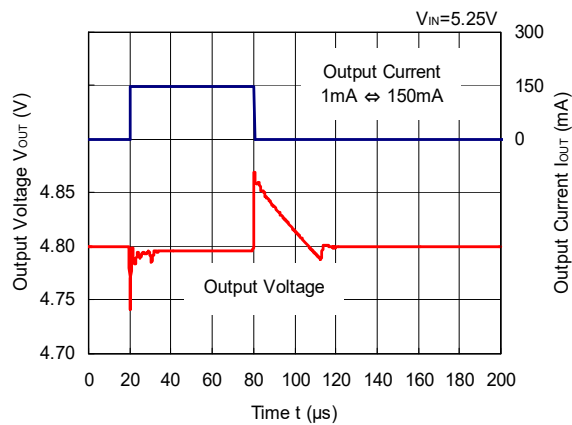


15) Turn on Speed with CE pin (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, Ta = 25°C)


RP112x12xx

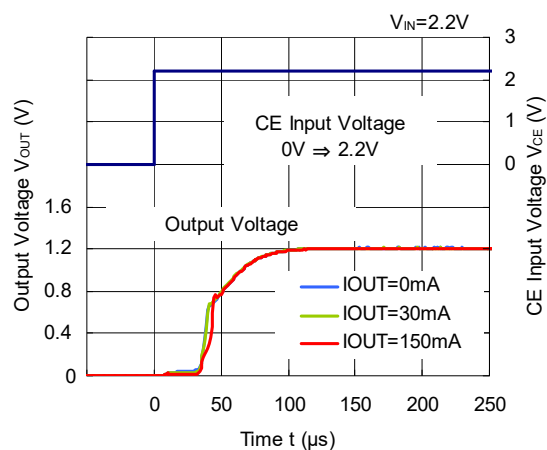


RP112x28xx

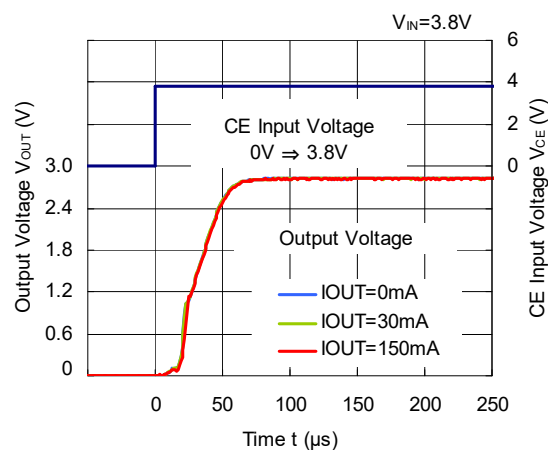

RP112x40xx

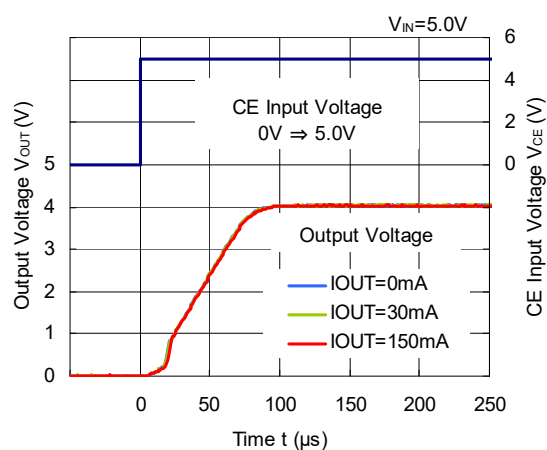


RP112x48xx

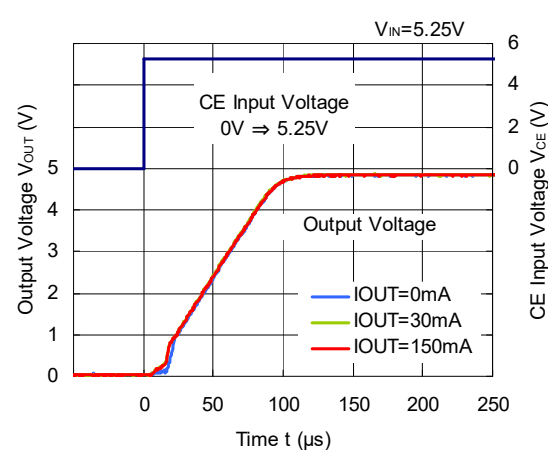


16) Turn off Speed with CE pin (RP112xxxxB) (C1 = Ceramic 1.0 μ F, C2 = Ceramic 1.0 μ F, Ta = 25°C)


RP112x12xx

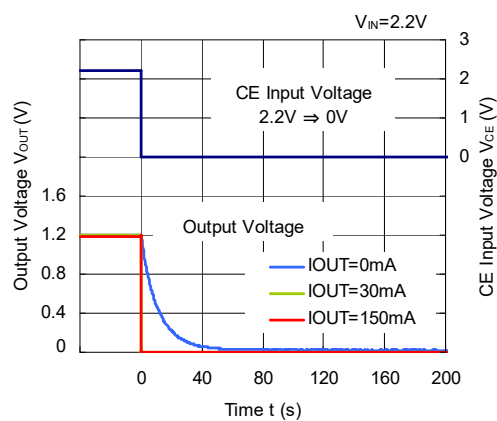

RP112x28xx

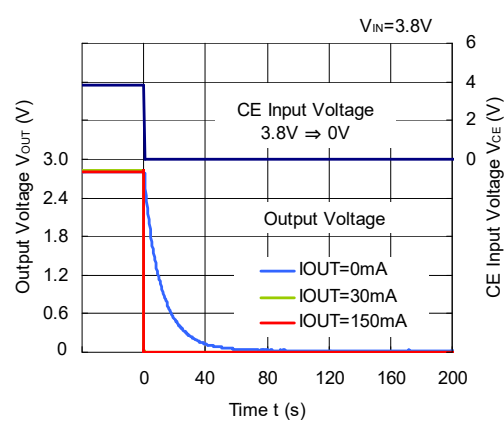


RP112x40xB

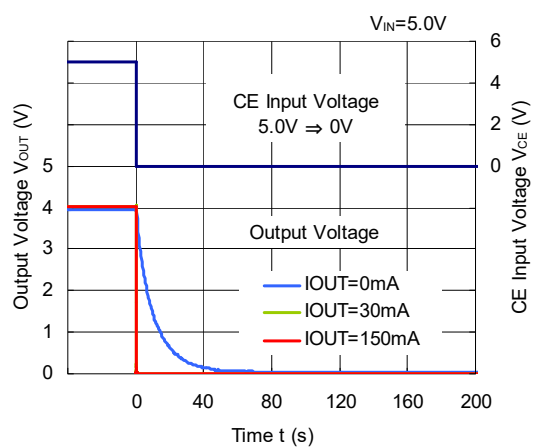


17) Turn off Speed with CE pin (RP112xxxxD) (C1 = Ceramic 1.0 μF , C2 = Ceramic 1.0 μF , $T_a = 25^\circ\text{C}$)


RP112x12xD

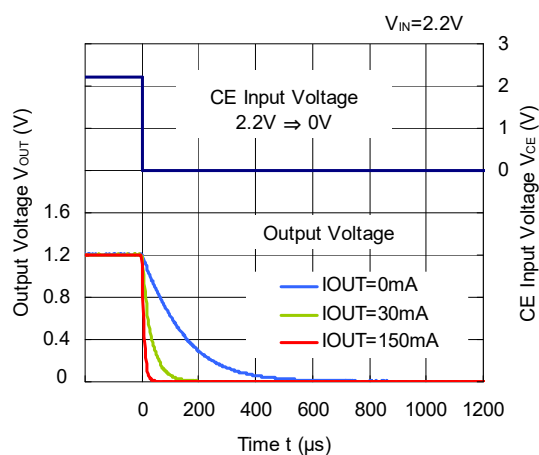

RP112x28xD

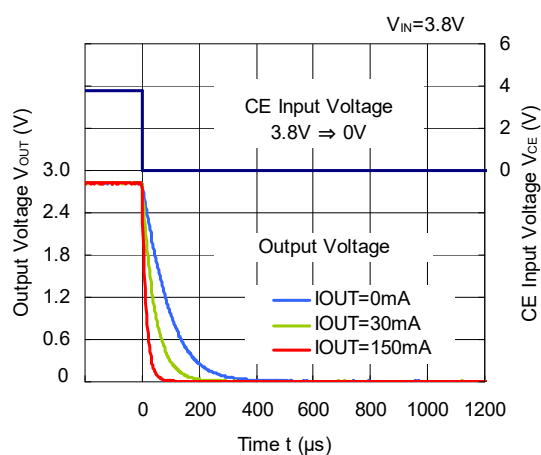


RP112x40xD

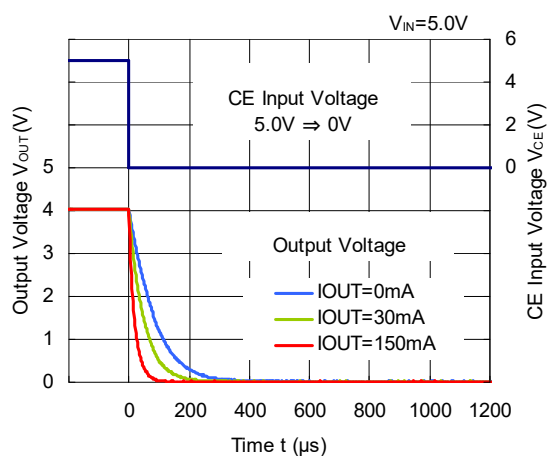


18) Inrush Current (C1 = Ceramic 1.0 μ F, I_{OUT} = 0 mA, Ta = 25°C)


RP112x12xx

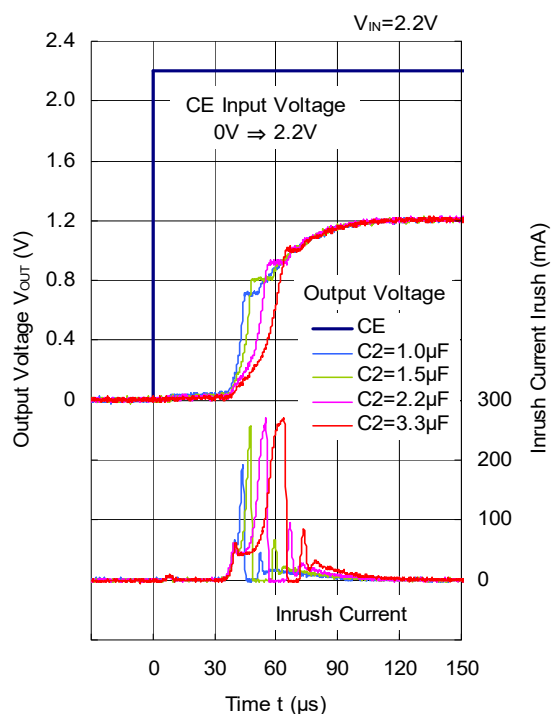


RP112x28xx

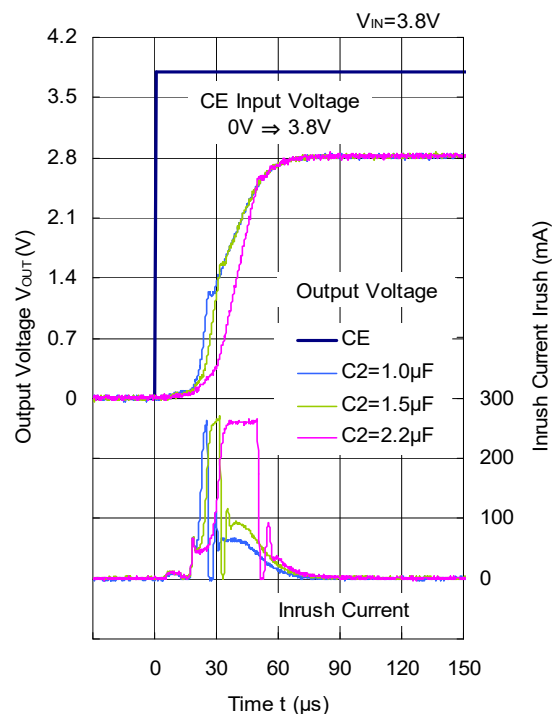

RP112x40xx

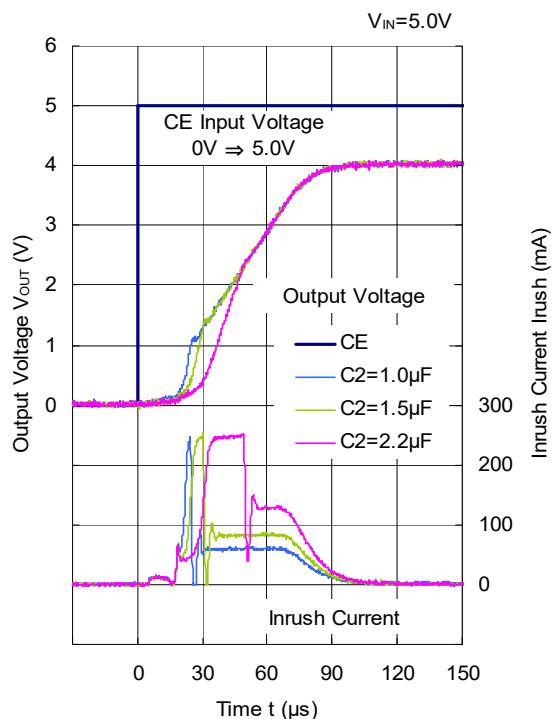

RP112x48xx

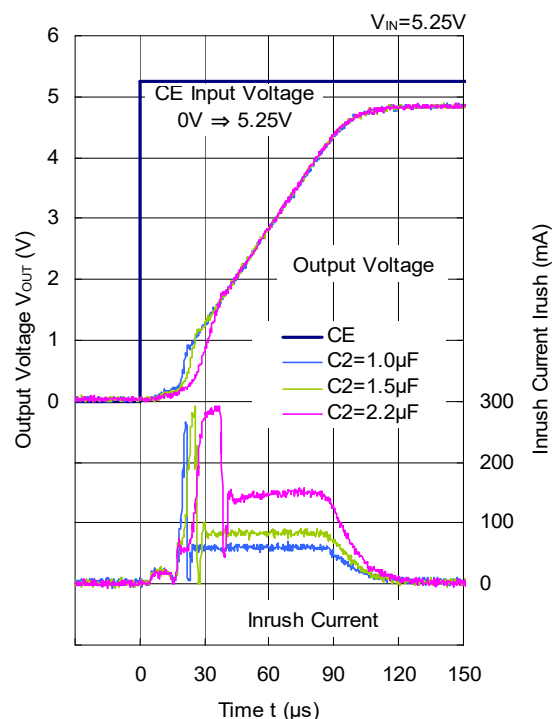

Equivalent Series Resistance vs. Output Current

When using these ICs, consider the following points:

The relations between I_{OUT} (Output Current) and ESR of an output capacitor are shown below.

The conditions when the white noise level is under 40 μV (Avg.) are marked as the hatched area in the graph.

Measurement Conditions


Frequency Band: 10 Hz to 2 MHz

Temperature: -40°C to 85°C


Hatched Area: Noise level is under 40 μV (Avg.)

C1, C2: 1.0 μF or more


RP112x12xx

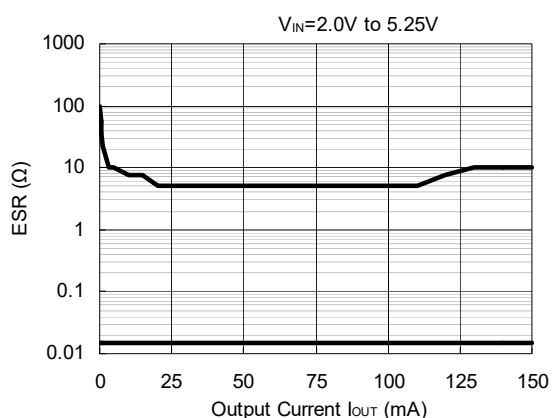

RP112x28xx

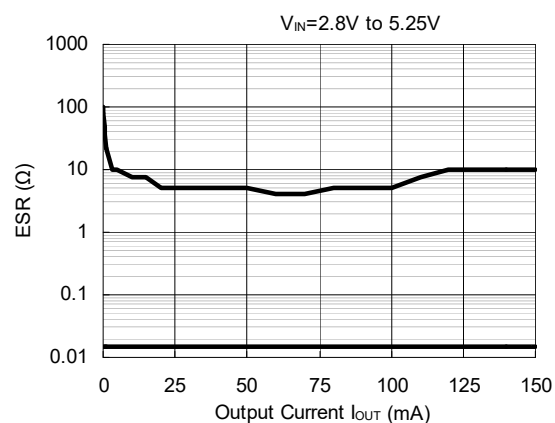

RP112x40xx

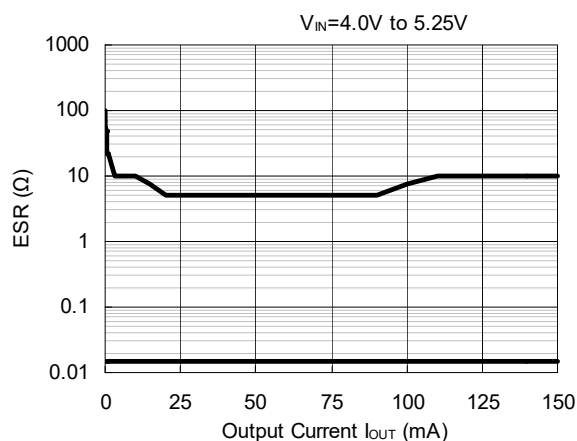

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following measurement conditions are based on JEDEC STD. 51-7.


Measurement Conditions

Item	Measurement Conditions
Environment	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-Layer Board)
Board Dimensions	76.2 mm × 114.3 mm × 0.8 mm
Copper Ratio	Outer Layer (First Layer): Less than 95% of 50 mm Square Inner Layers (Second and Third Layers): Approx. 100% of 50 mm Square Outer Layer (Fourth Layer): Approx. 100% of 50 mm Square
Through-holes	φ 0.2 mm × 11 pcs


Measurement Result (Ta = 25°C, Tjmax = 125°C)

Item	Measurement Result
Power Dissipation	800 mW
Thermal Resistance (θja)	θja = 125°C/W
Thermal Characterization Parameter (ψjt)	ψjt = 58°C/W

θja: Junction-to-Ambient Thermal Resistance
ψjt: Junction-to-Top Thermal Characterization Parameter

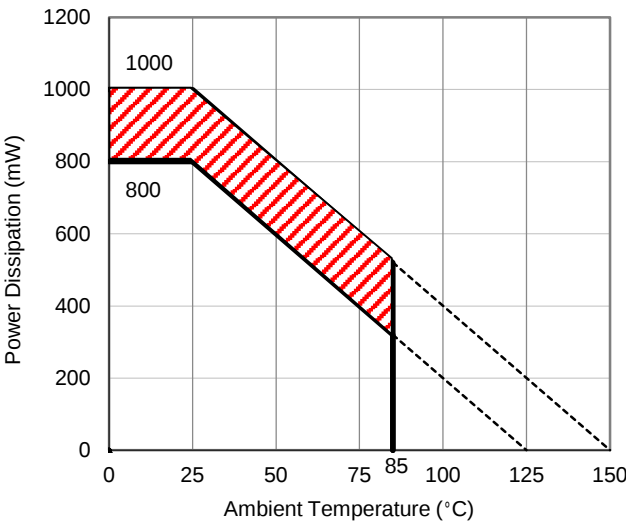


Power Dissipation vs. Ambient Temperature

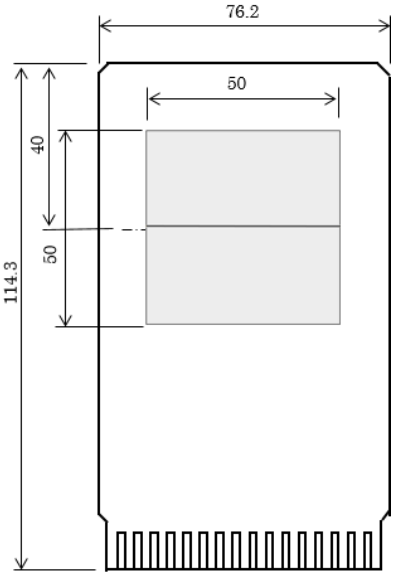

Measurement Board Pattern

The above graph shows the power dissipation of the package at Tjmax = 125°C and Tjmax = 150°C. Operating the device in the hatched range might have a negative influence on its lifetime. The total hours of use and the total years of use must be limited as follows:

Total Hours of Use	Total Years of Use (4 hours/day)
13,000 hours	9 years

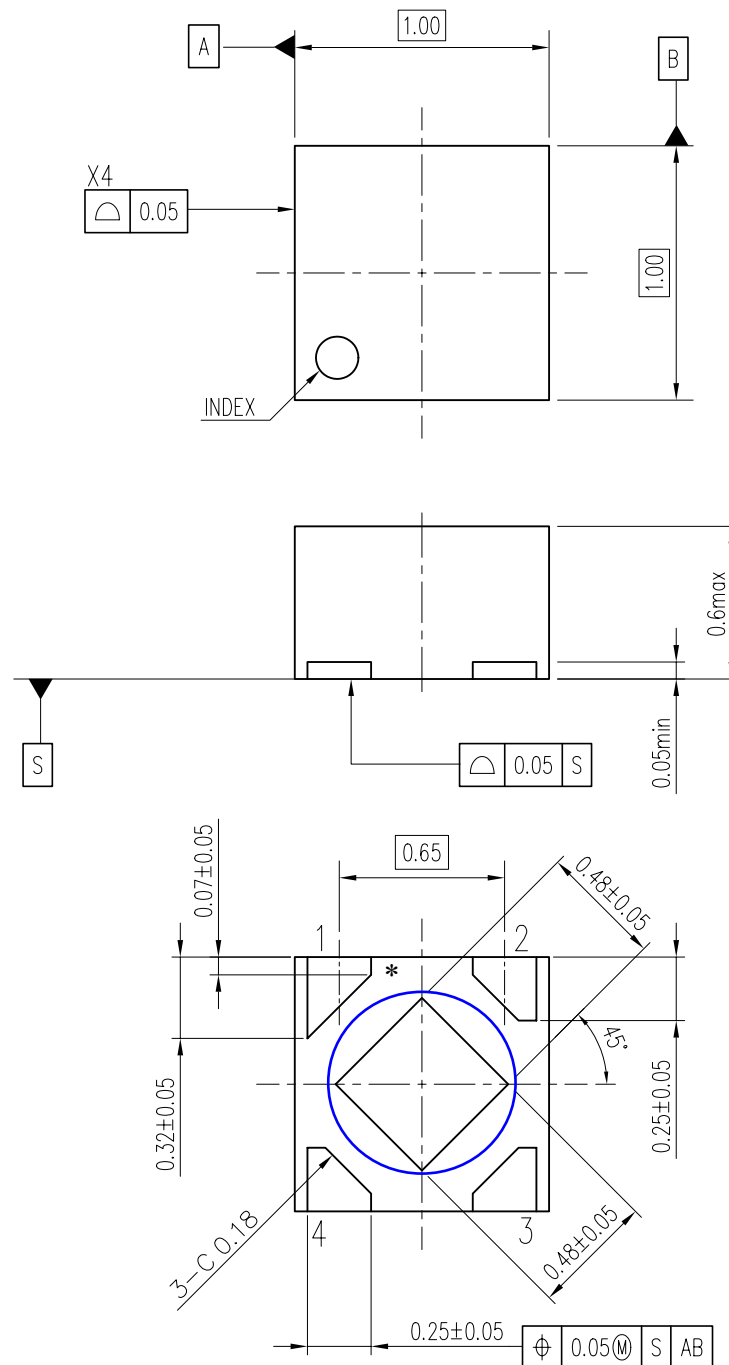

DFN(PLP)1010-4 Package Dimensions (Unit: mm)

* The tab on the bottom of the package shown by blue circle is a substrate potential (GND). It is recommended that this tab be connected to the ground plane on the board but it is possible to leave the tab floating.

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement.

Measurement Conditions

Item	Standard Test Land Pattern
Environment	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Double-Sided Board)
Board Dimensions	40 mm × 40 mm × 1.6 mm
Copper Ratio	Top Side: Approx. 50% Bottom Side: Approx. 50%
Through-holes	φ 0.5 mm × 44 pcs


Measurement Result

(Ta = 25°C, Tjmax = 125°C)


Item	Standard Test Land Pattern
Power Dissipation	380 mW
Thermal Resistance (θja)	θja = 263°C/W
Thermal Characterization Parameter (ψjt)	ψjt = 75°C/W

θja: Junction-to-Ambient Thermal Resistance

ψjt: Junction-to-Top Thermal Characterization Parameter

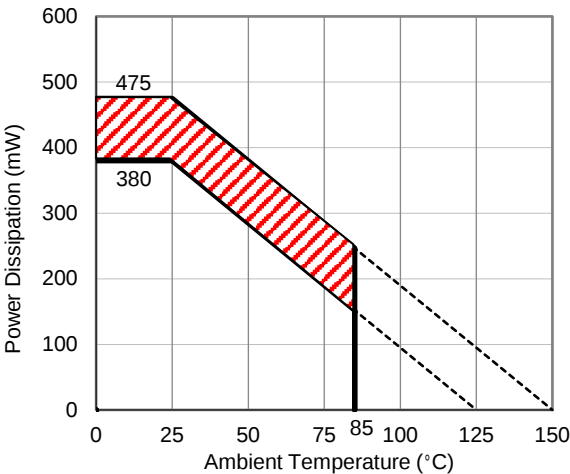


Power Dissipation vs. Ambient Temperature

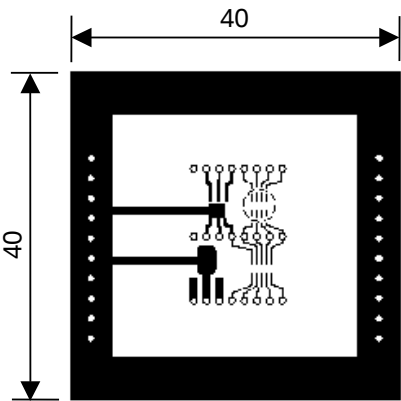

Measurement Board Pattern

The above graph shows the power dissipation of the package at Tjmax = 125°C and Tjmax = 150°C. Operating the device in the hatched range might have a negative influence on its lifetime. The total hours of use and the total years of use must be limited as follows:

Total Hours of Use	Total Years of Use (4 hours/day)
13,000 hours	9 years

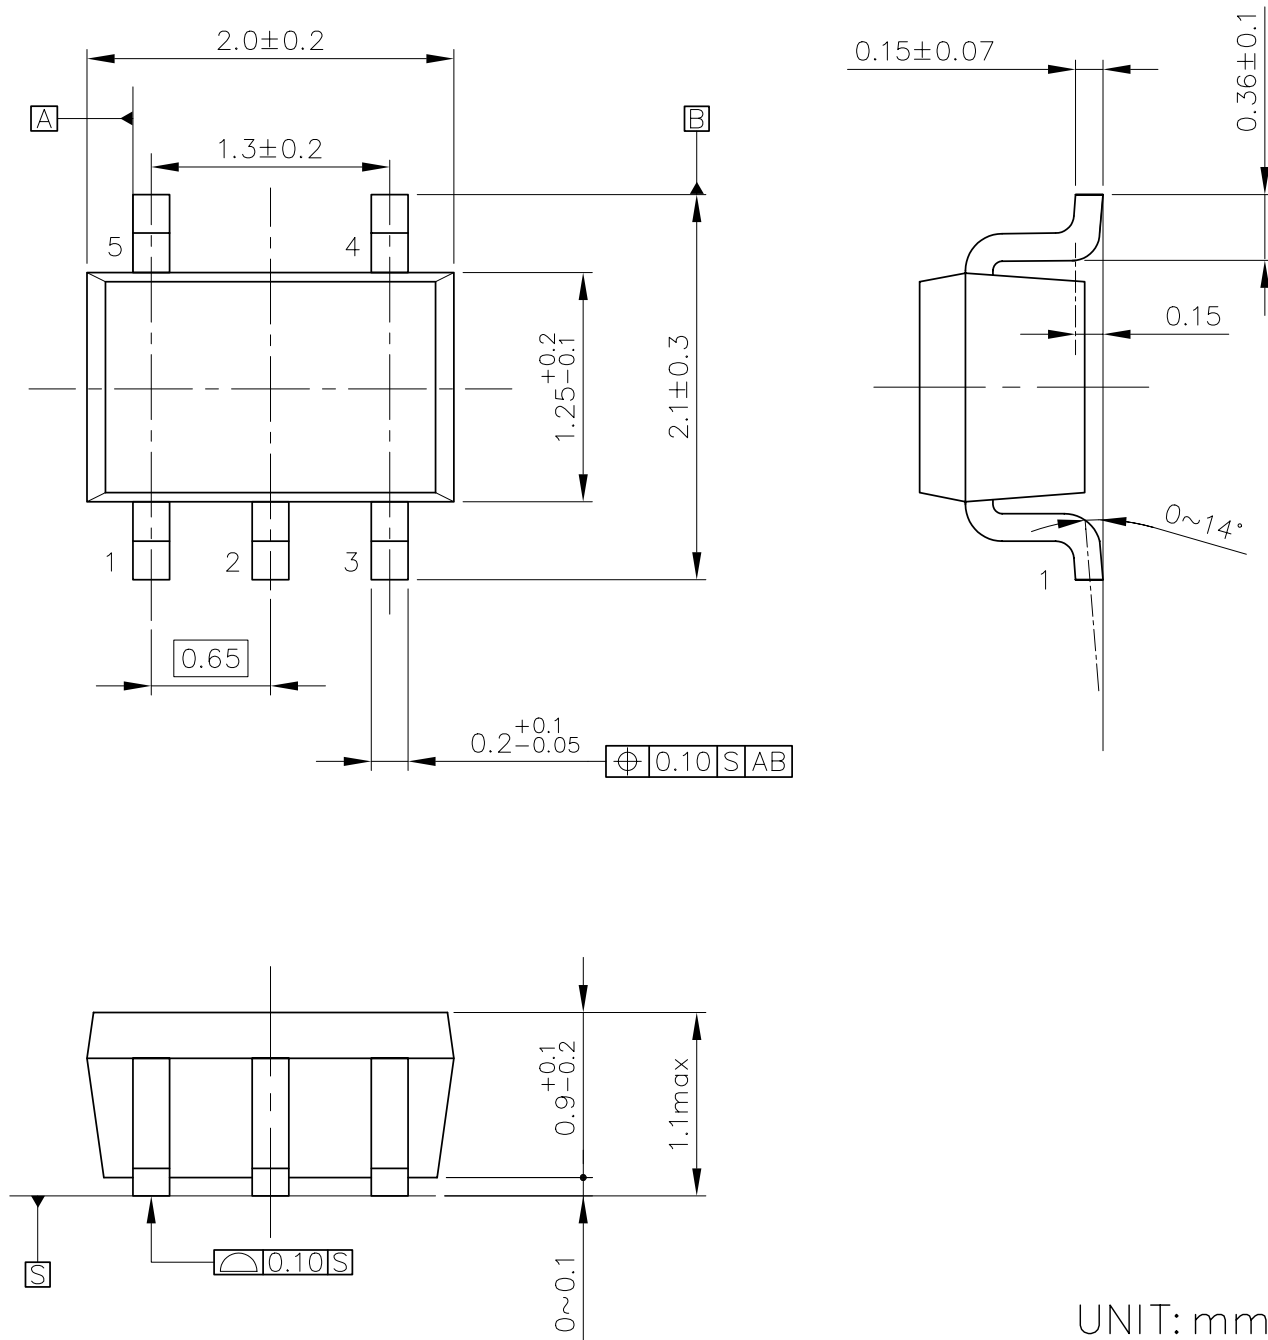

SC-88A Package Dimensions

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following measurement conditions are based on JEDEC STD. 51-7.

Measurement Conditions

Item	Measurement Conditions
Environment	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-Layer Board)
Board Dimensions	76.2 mm × 114.3 mm × 0.8 mm
Copper Ratio	Outer Layer (First Layer): Less than 95% of 50 mm Square Inner Layers (Second and Third Layers): Approx. 100% of 50 mm Square Outer Layer (Fourth Layer): Approx. 100% of 50 mm Square
Through-holes	φ 0.3 mm × 7 pcs


Measurement Result

(Ta = 25°C, Tjmax = 125°C)


Item	Measurement Result
Power Dissipation	660 mW
Thermal Resistance (θja)	θja = 150°C/W
Thermal Characterization Parameter (ψjt)	ψjt = 51°C/W

θja: Junction-to-Ambient Thermal Resistance

ψjt: Junction-to-Top Thermal Characterization Parameter

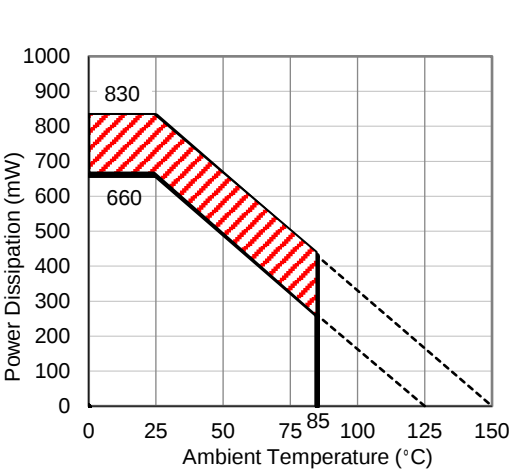


Power Dissipation vs. Ambient Temperature

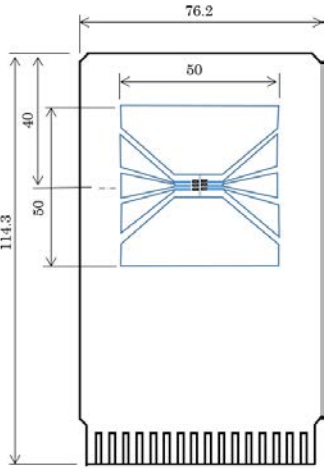

Measurement Board Pattern

The above graph shows the power dissipation of the package at Tjmax = 125°C and Tjmax = 150°C. Operating the device in the hatched range might have a negative influence on its lifetime. The total hours of use and the total years of use must be limited as follows:

Total Hours of Use	Total Years of Use (4 hours/day)
13,000 hours	9 years

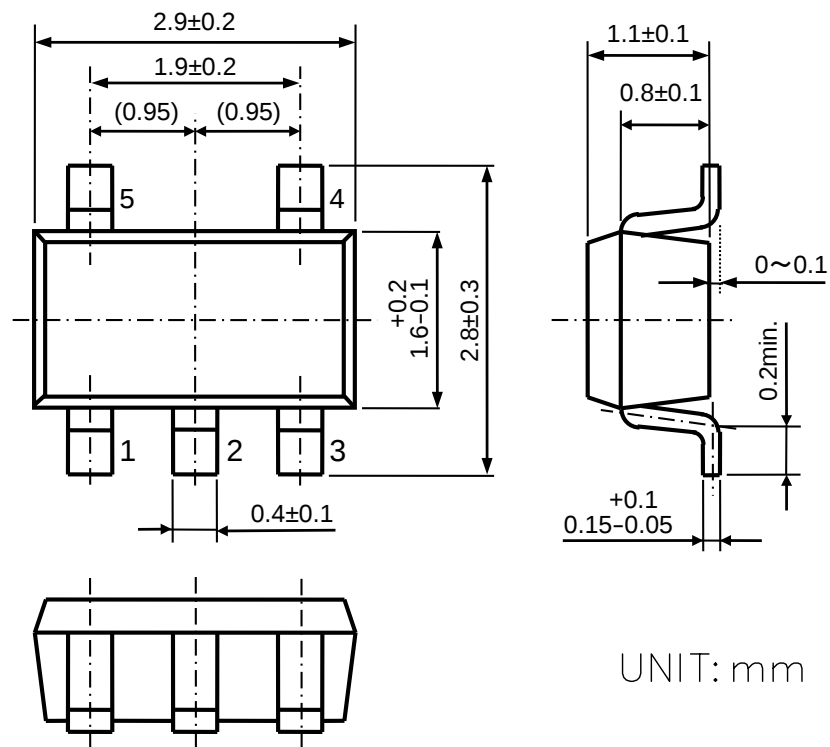

SOT-23-5 Package Dimensions



本ドキュメント掲載の技術情報及び半導体のご使用につきましては以下の点にご注意ください。

1. 本ドキュメントに記載しております製品及び製品仕様は、改良などのため、予告なく変更することがあります。又、製造を中止する場合がありますので、ご採用にあたりましては当社又は販売店に最新の情報をお問合せください。
2. 文書による当社の承諾なしで、本ドキュメントの一部、又は全部をいかなる形でも転載又は複製されることは、堅くお断り申し上げます。
3. 本ドキュメントに記載しております製品及び技術情報のうち、「外国為替及び外国貿易管理法」に該当するものを輸出される場合、又は国外に持ち出される場合は、同法に基づき日本国政府の輸出許可が必要です。
4. 本ドキュメントに記載しております製品及び技術情報は、製品を理解していただくためのものであり、その使用に関して当社及び第三者の知的財産権その他の権利に対する保証、又は実施権の許諾を意味するものではありません。
5. 本ドキュメントに記載しております製品は、標準用途として一般的電子機器（事務機、通信機器、計測機器、家電製品、ゲーム機など）に使用されることを意図して設計されております。故障や誤動作が人命を脅かしたり、人体に危害を及ぼす恐れのある特別な品質、信頼性が要求される装置（航空宇宙機器、原子力制御システム、交通機器、輸送機器、燃焼機器、各種安全装置、生命維持装置等）に使用される際には、必ず事前に当社にご相談ください。
6. 当社は品質、信頼性の向上に努めておりますが、半導体製品はある確率で故障が発生します。故障の結果として人身事故、火災事故、社会的な損害等を生じさせない冗長設計、延焼対策設計、誤動作防止設計等安全設計に十分ご注意ください。誤った使用又は不適切な使用に起因するいかなる損害等についても、当社は責任を負いかねますのでご了承ください。
7. 本ドキュメントに記載しております製品は、耐放射線設計はなされております。
8. X線照射により製品の機能・特性に影響を及ぼす場合があるため、評価段階で機能・特性を確認の上でご利用ください。
9. WLCSPパッケージの製品は、遮光状態でご利用ください。光照射環境下（動作、保管中含む）では、機能・特性に影響を及ぼす場合があるためご注意ください。
10. パッケージ捺印は、画像認識装置の仕様によって文字認識に差が生じることがあります。画像認識装置にて文字認識をする場合は、事前に弊社販売店または弊社営業担当者までお問い合わせください。
11. 本ドキュメント記載製品に関する詳細についてのお問合せ、その他お気付きの点がございましたら当社又は販売店までご照会ください。

NISSHINBO

日清紡マイクロデバイス株式会社

公式サイト

<https://www.nisshinbo-microdevices.co.jp/>

購入のご案内

<https://www.nisshinbo-microdevices.co.jp/ja/buy/>

●お問い合わせ・ご用命は・・・