

swissbit®


Product Fact Sheet

Industrial M.2 PCIe SSD

N-16m2 2280 Series PCIe 3.1, 3D pSLC

Commercial and Industrial
Temperature Grade

Date: March 30, 2021
Revision: 1.00

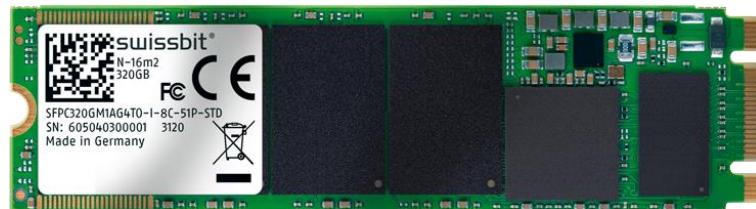

Product Summary

- **Capacities:** 40 GBytes, 80 GBytes, 160 GBytes, 320 GBytes
- **Form Factor:** PCI Express® M.2 2280 (80 mm x 22 mm x 2.23 mm)
- **Compliance¹:** PCI Express (PCIe) Specification Revision 3.1
- **Interface:** Gen3 x 2 Lanes
 - Drive operates in x1 mode in x1 M.2 PCIe slots
 - Drive operates in x2 mode in x2 or x4 M.2 PCIe slots
- **Command Sets:** Supports NVMe 1.2
- **Performance:**
 - Read Performance: Sequential Read up to 1,600 MBytes/s, Random Read 4K up to 190,000 IOPS
 - Write Performance: Sequential Write up to 1,050 MBytes/s, Random Write 4K up to 190,000 IOPS
- **Operating Temperature Range²:**
 - Commercial: 0 °C to 70 °C
 - Industrial: -40 °C to 85 °C
- **Storage Temperature Range:** -40 °C to 85 °C
- **Operating Voltage:** 3.3 V ± 5%
- **Low Power Consumption**
- **Data Retention:** 10 Years @ Life Begin; 1 Year @ Life End
- **Endurance in TeraBytes Written (TBW) @ Max Capacity³:**
 - Sequential ≥ 10,600
 - Client ≥ 8,390
 - Enterprise ≥ 2,000
- **Shock/Vibration:** 1,500 g / 50 g
- **High-Performance 32-Bit Processor with Integrated, Parallel Flash Interface Engines:**
 - Triple-Level Cell (TLC) 3D NAND Flash in pSLC Mode
 - ECC with up to 120 bit correction per 1 KByte page
- **High Reliability:**
 - Mean Time Between Failure (MTBF): > 2,000,000 hours
- **Data Reliability:** < 1 non-recoverable error per 10¹⁶ bits read

¹ The verification of host system and storage device compatibility is in customer's responsibility. Swissbit can provide guidance and support on request.

² Adequate airflow is required to ensure the temperature, as reported in the S.M.A.R.T. data, does not exceed 125°C (industrial temperature drive) and 110°C (commercial temperature drive) respectively.

³ According to JEDEC (JESD47), the time to write the full TBW is a minimum of 18 months. Higher average daily data volume reduces the specified TBW. The values listed are estimates and are subject to change without notice.

Product Features

- Dynamic and Static Wear Leveling
- Subpage Mode Flash Translation Layer (FTL)
- Data Care Management
 - Active: Adaptive Read Refresh
 - Passive: Background Media Scan
- Lifetime Enhancements
 - Dynamic Bad Block Remapping
 - Write Amplification Reduction
- On-Board Power Fail Protection
- Deallocate and I/O Queues
- NVMe Security Command Support
- Active State Power Management (ASPM) Support
- In-Field Firmware Update⁴
- Enterprise-Grade Self-Monitoring, Analysis, and Reporting Technology (S.M.A.R.T.)
- 30 µinch Gold-Plated Connector (IPC-6012B Class 2 Compliant)
- End-to-End (E2E) Data Protection
- AES256 Encryption
- TCG Opal 2.0 Compliant (on request)
- Life Cycle Management
- Controlled "Locked" BOM
- RoHS-6 Compliant
- Swissbit Life Time Monitoring (SBLTM) Tool and SDK for SBLTM (on request)

Why Swissbit?

Swissbit is focused on the design, development, manufacture, and support of leading edge memory and storage solutions for the worldwide OEM/ODM marketplace. As a global supplier, Swissbit recognizes and addressees the higher level of application requirements of today's industrial, Netcom, and automotive customers by providing best-in-class products and services, with uncompromised attention to driving overall value and quality.

⁴ The support of In-Field FW update capabilities on host systems is recommended.