

LOCTITE LM 100

June 2015

PRODUCT DESCRIPTION

LOCTITE LM 100 provides the following product characteristics:

Technology	Solder paste
Application	Pb-free soldering

LOCTITE LM 100 no clean flux is designed for use with low temperature Pb-free solder alloys. LOCTITE LM 100 is formulated to provide excellent dispensability, printability and solderability through various reflow profiles.

FEATURES AND BENEFITS

- Stencil and screen print capability.
- Wide reflow process window.
- Colorless residues.
- Good resistance to humidity.
- Good solderability to Copper and Matt nickel.

TYPICAL PROPERTIES

Based on (J-STD-005) Type 2 powder.

Solder Paste Typical Properties

Alloys	Bi58
Metal Loading (Weight %)	90
Composition	Sn42Bi58
Alloy melting range, °C	138
Powder Particle Size, µm	38 to 53
Powder Size Coding	AAS
Malcom Viscosity, 10 rpm, Poise	1,350
Thixotropic Index	0.5

Solder Powder:


Careful control of the atomization process for production of solder powders for LOCTITE LM 100 solder paste ensures that the solder powder produced meets the requirements of J-STD-006 for powder shape, size distribution and alloy composition. Other alloys may be available on request.

DIRECTIONS FOR USE


Reflow:

LOCTITE LM 100 solder paste is formulated to reflow in air although a wider process window can be achieved if reflow is carried out under nitrogen. There is no single reflow profile which is suitable for all processes and applications, but the following graphs show profile examples that have given good results in practice.

Profile 1:

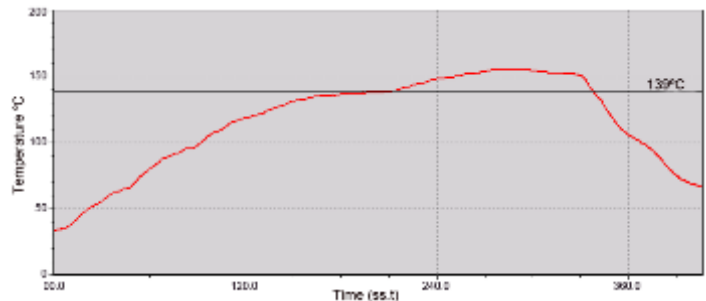

Profile 2:

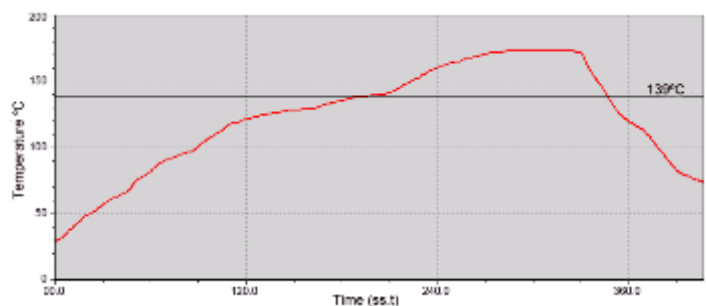

RELIABILITY PROPERTIES

Test	Specification	Results
IPC Corrosion	J-STD-004	Pass
Chlorides & Bromides	J-STD-004	Pass
Flux solids content	J-STD-004	50% by weight
Typical flux acid value	J-STD-004	110 mg KOH/g
Flux halide content	J-STD-004	<0.005%

STORAGE AND SHELF LIFE

Shelf Life:

Provided LOCTITE LM 100 is stored tightly sealed in the original container at 0 to 10°C, a minimum shelf life of 183 days can be expected.

Cleaning:

LOCTITE LM 100 solder paste residues can be removed using commonly available cleaning solvents for electronic assembly such as Isopropanol and Multicore MCF800.

DATA RANGES

The data contained herein may be reported as a typical value and/or a range. Values are based on actual test data and are verified on a periodic basis.

GENERAL INFORMATION

For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).

Not for Product Specifications

The technical information contained herein is intended for reference only. Please contact Henkel Technologies Technical Service for assistance and recommendations on specifications for this product.

Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$

$\text{kV/mm} \times 25.4 = \text{V/mil}$

$\text{mm} / 25.4 = \text{inches}$

$\mu\text{m} / 25.4 = \text{mil}$

$\text{N} \times 0.225 = \text{lb}$

$\text{N/mm} \times 5.71 = \text{lb/in}$

$\text{N/mm}^2 \times 145 = \text{psi}$

$\text{MPa} \times 145 = \text{psi}$

$\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$

$\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$

$\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$

$\text{mPa}\cdot\text{s} = \text{cP}$

Disclaimer**Note:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference **N/A**