

400 WATTS

SINGLE OUTPUT AC-DC

FEATURES:

- Compact 4.06" x 9.4" x 1.8" Size
- 3 Year Warranty
- Universal 85-264V Input
- Single High Efficiency Output
- Power Fail Warning
- 0-70°C Operating Temperature
- RoHS Compliant
- IEC 60601-1 3rd ed. Medical Cert.
- IEC 62368-1 2nd ed. Certification
- IEC 60601-1-2 4th ed. EMC
- Class B Emissions per EN55011/32
- Optional Single Wire Load Sharing
- Optional Remote Inhibit/Enable



SAFETY SPECIFICATIONS



CB Reports/Certificates (including all National and Group Deviations) IEC 62368-1:2014, 2nd Edition
IEC 60601-1:2005/A1:2012



TUV SUD America EN 62368-1:2014, 2nd Edition
EN 60601-1:2006/A1:2013



Low Voltage Directive (2014/35/EU of February 2014)
RoHS Directive (Recast) (2015/863/EU of March 2015)



Electrical Equipment (Safety) Regulations 2016 SI No. 1101
Restriction of the Use of Certain Hazardous Substances in EEE Regulations 2012 SI No. 3032 + 2019 SI No.492

MODEL LISTING

NXT-400-1003-FN	5V/80.0A
NXT-400-1004-FN	12V/33.3A
NXT-400-1005-FN	15V/26.7A
NXT-400-1006-FN	24V/16.7A
NXT-400-1007-FN	28V/14.3A

ORDERING INFORMATION

Consult factory for alternate output configurations.

Please specify the following optional features when ordering:

LSEVB - Load Share Evaluation Board
LS - Single Wire Load Sharing

All specifications are maximum at 25°C/400W unless otherwise stated, may vary by model and are subject to change without notice.

NXT-400-FN

OUTPUT SPECIFICATIONS

Output Power at 50°C ₍₁₎	400W
Power Derating	2.5 W _{OUT} / 1 V _{IN} below 100 V _{IN}
Voltage Centering	± 0.5% (50% load)
Voltage Adjust Range	95-105%
Load Regulation	0.5% (0-100% load change)
Source Regulation	0.5%
Noise	1.0% or 100mV Whichever is greater
Turn on Overshoot	None
Transient Response	Output recovers to within 1% of initial set point due to a 50% step load change, 500µS maximum, 4% maximum deviation.
Overshoot Protection	Latching, between 110% and 150% of rated output voltage.
Overpower Protection	110-130% rated Pout, cycle on/off, auto recovery
Hold Up Time	16ms min., Full Power, 85-264V Input
Start Up Time	3 Seconds, 120V Input

INPUT SPECIFICATIONS

Protection Class	I
Source Voltage	85 – 264 Volts AC
Frequency Range	47 – 63 Hz
Input Protection ₍₃₎	Internal 10A Time Delay fuse
Peak Inrush Current	50A (cold)
Efficiency	85% Typical, Full Power varies by model
Power Factor	0.95 (Full Power, 230V), 0.98 (Full Power, 120V)

ENVIRONMENTAL SPECIFICATIONS

Ambient Operating	0°C to + 70°C
Temperature Range	Derating: See Power Rating Chart
Thermal Shutdown	Output voltage is inhibited during excessive internal temperatures, automatic reset.
Ambient Storage Temp. Range	- 40°C to + 85°C
Operating Relative Humidity Range	20-90% non-condensing
Altitude	10,000 ft. ASL Operating/40,000 ft. ASL Non-operating
Temperature Coefficient	0.02%/°C
Vibration	2.5g, 10Hz. – 2KHz per MIL-STD-810F Method 514.5
Shock	20g, peak per MIL-STD-810F Method 516.5

GENERAL SPECIFICATIONS

Means of Protection	2MOPP (Means of Patient Protection) 1MOOP (Means of Operator Protection) Operational Insulation(Consult factory for 1MOPP)
Dielectric Strength _(5,6)	5656 VDC, Primary to Secondary 2121 VDC, Primary to Ground 707 VDC, Secondary to Ground
Reinforced Insulation	
Basic Insulation	
Operational Insulation	
Leakage Current	
Earth Leakage	<300µA NC, <1000µA SFC
Touch Current	<100µA NC, <500µA SFC
Power Fail Signal ₍₁₀₎	Logic low with input power failure 10 ms minimum prior to output 1 dropping 1%.
Load Share (optional) _(11, 12, 13)	Single wire current sharing with return via negative sense return. Minimum current share load is 10% of each module's output current rating. Maximum output voltage deviation between modules is 5% for 2.5 through 5 V models and 400 mV for remaining models.
Remote Sense ₍₇₎	400mV compensation of output cable losses
Mean-Time Between Failures	100,000 Hours min., MIL-HDBK-217F, 25° C, GB
Weight	3.50 Lbs.

EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4th ed./IEC 61000-6-2:2005)


Electrostatic Discharge	EN 61000-4-2	±8KV contact / ±15KV air discharge	A
Radiated Electromagnetic Field	EN 61000-4-3	80MHz-2.7GHz, 10V/m, 80% AM	A
Electrical Fast Transients/Bursts	EN 61000-4-4	±2 KV, 5KHz/100KHz	A
Surge Immunity	EN 61000-4-5	±2 KV line to earth / ±1 KV line to line	A
Conducted Immunity	EN 61000-4-6	0.15 to 80MHz, 10V, 80% AM	A
Magnetic Field Immunity	EN 61000-4-8	30A/m, 60 Hz.	A
Voltage Dips	EN 61000-4-11	0% U _T , 0.5 cycles, 0-315° 100/240V A/A 0% U _T , 1 cycles, 0° 100/240V A/A 40% U _T , 10/12 cycles, 0° 100/240V B/A 70% U _T , 25/30 cycles, 0° 100/240V B/A	A
Voltage Interruptions	EN 61000-4-11	0% U _T , 300 cycles, 0° 100/240V B/B	
Radiated Emissions	EN 55011/32	Class B	
Conducted Emissions	EN 55011/32	Class B	
Harmonic Current Emissions	EN 61000-3-2	Class A	
Voltage Fluctuations/Flicker	EN 61000-3-3	Compliant	




INTEGRATED

POWER DESIGNS 300 Stewart Road ■ Wilkes-Barre, PA 18706 ■ Phone: (570) 824-4666 ■ Fax: (570) 824-4843 ■ Email: sales@ipdpower.com ■ Web: www.ipdpower.com


NXT-400 SERIES MECHANICAL SPECIFICATIONS

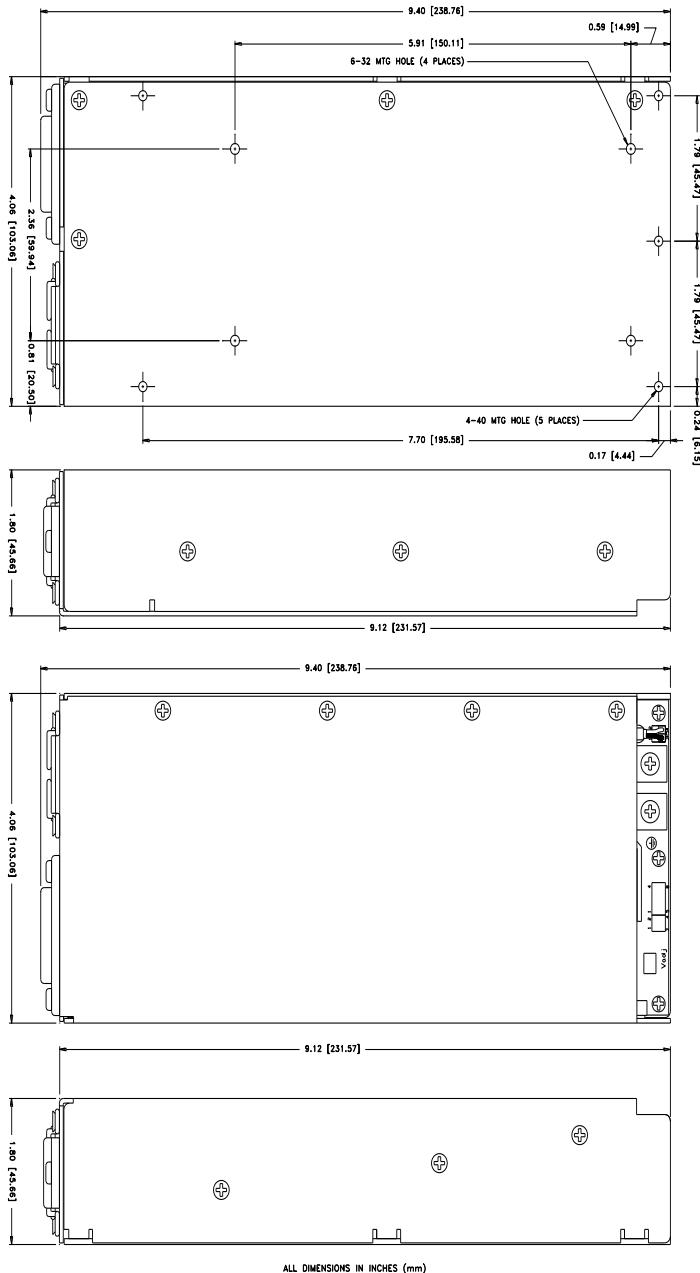

CONNECTOR SPECIFICATIONS



AC INLET: IEC 320 C14 mates with AC power cable C13 or equivalent AC power cable.

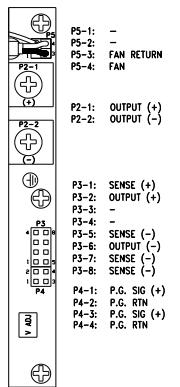

P2: 10-32 screw down terminal mates with #10 ring tongue terminal. (10 in-lb Max)


P3: 0.100 friction lock header mates with Molex 22-55-2081 or equivalent crimp terminal housing with Molex 71851 or equivalent crimp terminal.

P4: 0.100 friction lock header mates with Molex 22-55-2041 or equivalent crimp terminal housing with Molex 71851 or crimp equivalent terminal.

APPLICATIONS INFORMATION

1. Continuous Output Power must not exceed 400W.
2. This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
3. This product includes only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1:2005, a second fuse may be required in neutral conductor of the end product.
4. Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20MHz bandwidth.
5. This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC 60601-1:2005. In consideration of Clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product. It is highly recommended that the DC test voltages listed in DVB.1, Annex DVB of UL 60601-1 1st Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
6. This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
7. Remote-Sense terminals may be used to compensate for cable losses up to 400mV depending on model. The use of a twisted pair, decoupling capacitors and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
8. Maximum screw penetration into bottom chassis mounting holes is 0.100 inches.
9. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.
10. Power Fail (AC-Good) feature provides a logic-low warning signal from an open collector transistor output 10ms prior to loss of output from AC failure.
11. Low forward-voltage-drop oring diodes must be used in all load-sharing applications in 2.5 through 15V models. Oring diodes must be used on 24 through 48V models used in fault-tolerant applications but are optional in power-boosting applications. Oring diode power dissipation must be subtracted from the maximum output-power rating of each model.
12. Current-carrying conductors in load-sharing applications must be short and symmetrical.
13. Refer to Load-Share Evaluation Board data sheet for additional load-share applications information.

MAX P_{OUT} vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

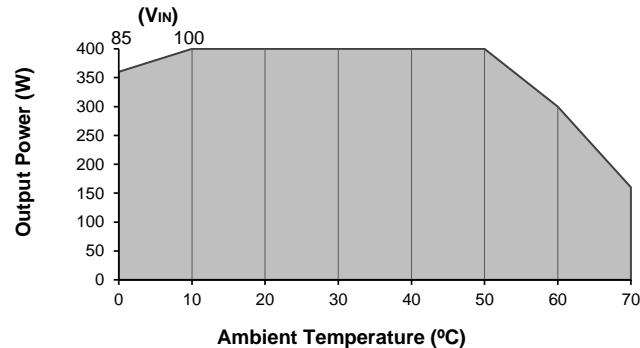

Derating requirements

- Derate 2.5W_{OUT}/1V_{IN} below 100V_{IN} and between 100V_{IN} and 85V_{IN}.
- Derate output power linearly to 40% between 50° and 70°C.

TYPICAL LOAD SHARE/REMOTE SENSE APPLICATION

