


A768, Polymer Aluminum, 1,000 uF, 20%, 16 VDC, -55/+125°C

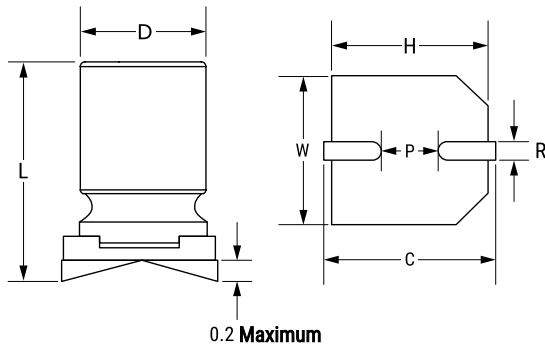

## General Information

Series:	A768
Dielectric:	Polymer Aluminum
Style:	SMD Can
Description:	Surface Mount, Polymer Aluminum
RoHS:	Yes
Lead:	V-Chip
Qualifications:	AEC-Q200
AEC-Q200:	Yes
Halogen Free:	Yes

## Dimensions

D	10mm +/-0.5mm
L	12.2mm +/-0.5mm
W	10.3mm +/-0.2mm
H	10.3mm +/-0.2mm
C	11mm +/-0.2mm
P	4.6mm NOM
R	0.8 - 1.1mm

## Packaging Specifications

Packaging:	T&R, 380mm
Packaging Quantity:	400

## Specifications

Capacitance:	1,000 uF
Capacitance Tolerance:	20%
Voltage DC:	16 VDC, 18.4 VDC (Surge)
Temperature Range:	-55/+125°C
Rated Temperature:	125°C
Life:	2000 Hrs
Resistance:	15 mOhms (100kHz 20C)
Ripple Current:	2700 mAmps (100kHz 125C)
High Temperature Solder:	No