

Pt Temperature Sensor with Jacketed Cable according to DIN EN 60751

Temperature range -40 °C to +260 °C

- Corrosion-resistant stainless steel housing
- Widely used for variety of temperature sensing applications
- Abrasion-resistant PFA-jacketed connection cable

The dimensionally stable stainless steel protective tube allows easy mounting in corresponding mating holes. Applications include temperature measurement in gas, including HVAC equipment at elevated temperatures. The housing material is resistant to oils, organic and inorganic bases and alkalis (medium concentration) and protects the sensor from mechanical damage.

Nominal Resistance R_0 [Ω]	Tolerance Class	Order Number
Pt100	F 0.3 (B)	5117584
Pt1000	F 0.3 (B)	5117585

Temperature Range of Tolerance Class

Tolerance Class F 0.3 (B) -40 °C to +260 °C

Temperature Coefficient

TCR = 3850 ppm/K

Connection Wire

PFA jacket, PFA primary insulation
26 AWG (0.14 mm²), 8 ft. (2.44 m) long
Color: White
Pt100: 3 wire connection
Pt1000: 2 wire connection

Internal Conductor Resistance

0.04 Ω/ft (0.134 Ω/m) for each conductor

Housing

Closed end tube, stainless steel 304 (1.4301)

Applications

- HVAC
- Data Logging
- Laboratory instrumentation



Image for illustration purposes only

Pt Temperature Sensor with Jacketed Cable according to DIN EN 60751

Temperature range -40 °C to +260 °C

Features

- Corrosion resistant stainless steel protective housing
- Abrasion - resistant PFA jacketed cable
- Widely used for a variety of temperature sensing applications
- Available in Pt100 or Pt 1000 resistance values
- +260 °C maximum operating temperature

Options

- Wire length
- Resistance Value
- Connectors

Resistance vs Temperature Table

Reference table @ www.heraeus.us/technical-information

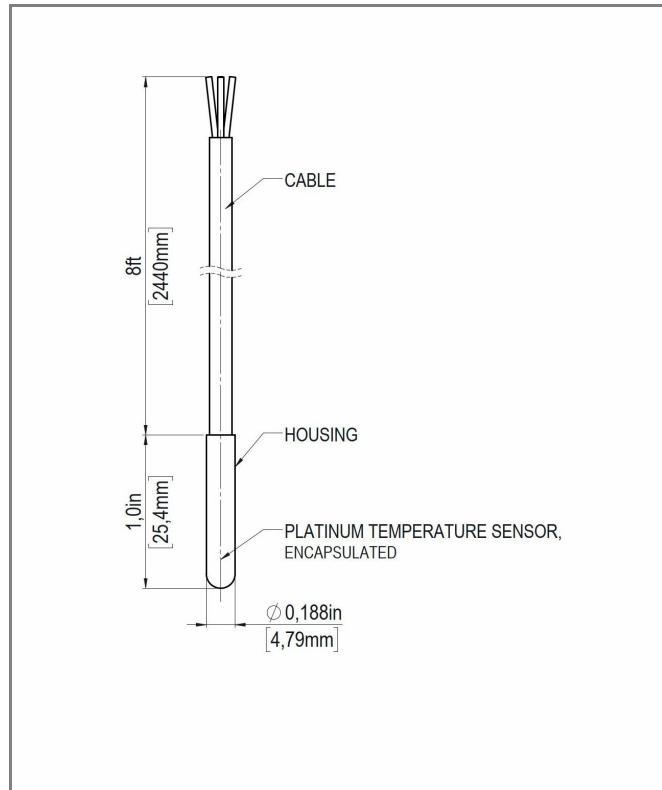


Image for illustration purposes only



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantees whatsoever. Furthermore, the information provided in this data sheet does not constitute a warranty, implied or express, whatsoever, including but not limited to warranties of merchantability, fitness for a particular purpose, or use. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use.

The customer is solely responsible to determine whether the product is suited for customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products of Heraeus is exclusively subject to the Terms and Conditions of Sale of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos USA, a division of Heraeus Epurio LLC, 770 Township Line Road, Suite 300, Yardley, Pennsylvania, USA 19067