


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 10174, GC	01/29/07	BS

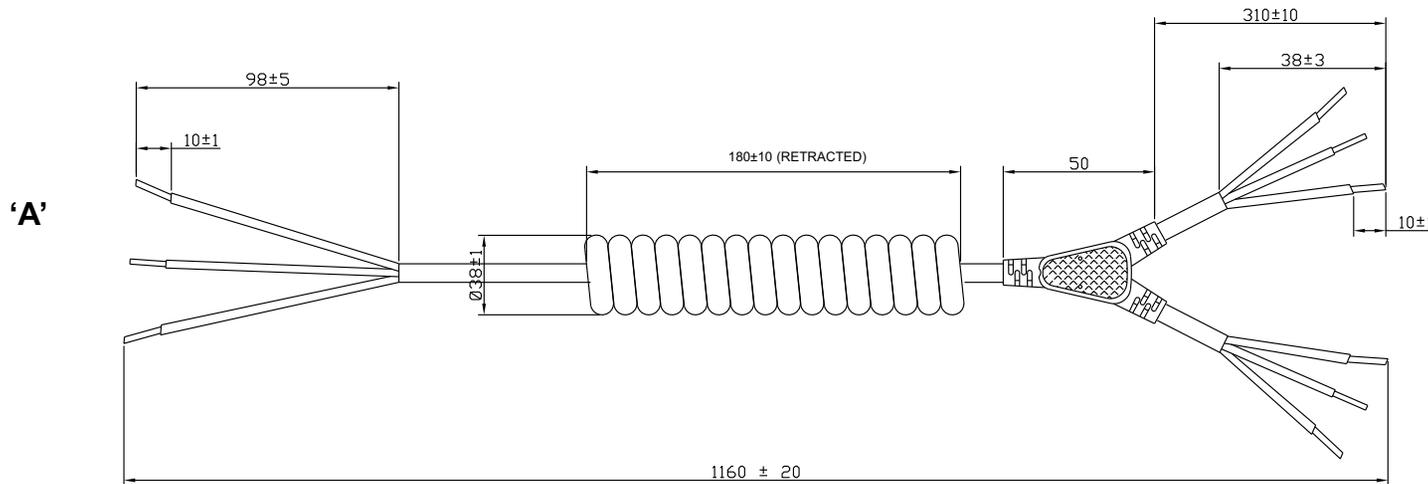

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing. A delay in receipt of this form will delay delivery schedule.

Company Name:
 Customer P/N:
 Quote Number:
 Date:
 Auth. Rep. Name:
 Auth. Rep. Signature:

RELEASED
 By pudxc at 3:14 pm, Jun 18, 2019

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: SJTW, 18 AWG, 3 CONDUCTOR
 TEMPERATURE RATING: 105° C
 CONDUCTOR COLORS: BLACK / WHITE / GREEN
 CABLE JACKET COLOR: YELLOW
 OVERALL LENGTH EXTENDED: 1160 ± 20 mm
 RETRACTED LENGTH: 180 ± 10 mm
 RETRACTED DIAMETER: Ø 38 ± 1 mm
 STRAIN RELIEF: 50 mm
 CABLE OUTER DIAMETER: 7.8 ± 0.2 mm
 END 'A' REMOVED OUTER JACKET
 END 'B' REMOVED OUTER JACKET
 APPROVALS CONNECTOR: UL, CSA or cUL
 APPROVALS CABLE: UL, CSA or cUL

CONDUCTOR SPECIFICATION:

End'A'	Color	ROJ ± 5 mm	RIJ±1 mm	Terminal
Wire 1	Green	98	10	Stripped
Wire 2	White	98	10	Stripped
Wire 3	Black	98	10	Stripped

End'B'	Color	ROJ ± 3 mm	RIJ±1 mm	Terminal
Wire 1	Green	38	10	Stripped
Wire 2	White	38	10	Stripped
Wire 3	Black	38	10	Stripped

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		 GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: GC	DATE: 01/29/07	DWG TITLE: RETRACTED POWER CABLE		
DRAWN: NF	DATE: 01/29/07	FSCN No.: G, CC	SIZE: A	REV. A
APRVD: HM	DATE: 01/29/07	SCALE: NONE	PART NO: 001943F0Y00X2	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice