
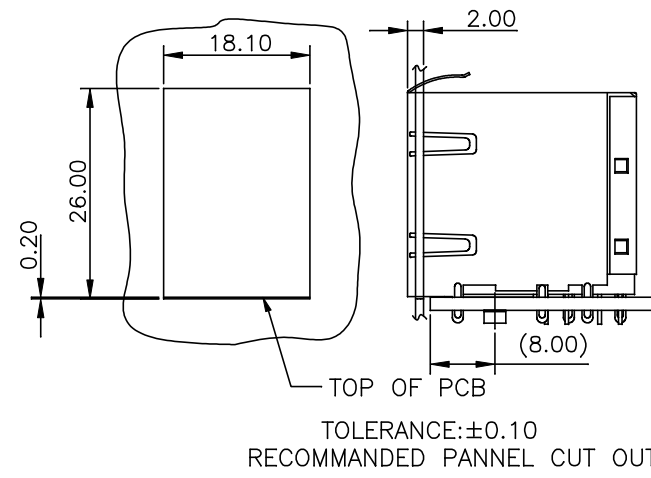


REVISION RECORD		
REV	DESCRIPTION	DRFT
1	ADD HEIGHT DIM OF TABS	VICTOR

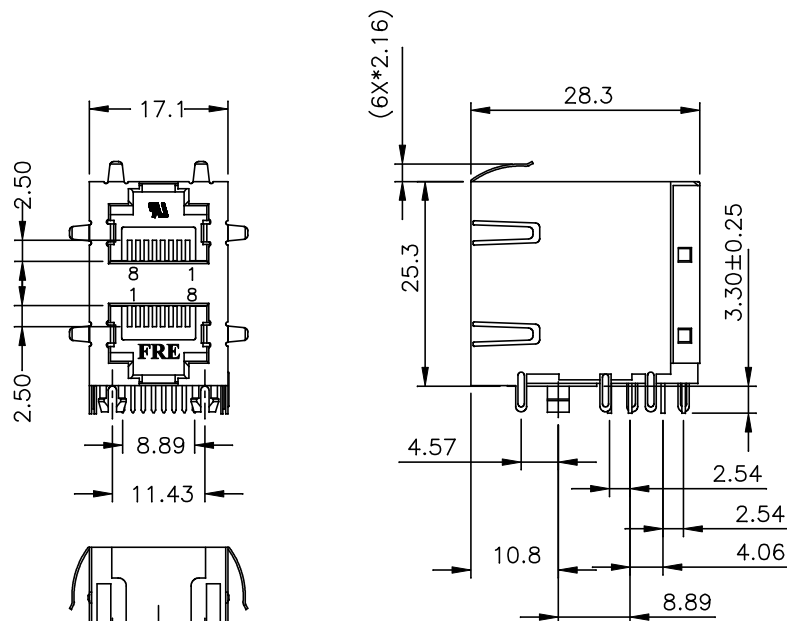

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 60 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.


MECHANICAL:

1. HOUSING MATERIAL : GLASS FIBER FILLED NYLON, UL94V-0/BLACK.
2. INSERT MATERIAL : GLASS FIBER FILLED NYLON, UL94V-0/BLACK.
3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
4. SHIELD MATERIAL : COPPER ALLOY WITH NICKEL PLATING.
5. PLATING : GOLD PLATING OVER NICKEL.
6. OPERATING LIFE : 750 CYCLES MIN.
7. PCB RETENTION PRE-SOLDER : 1 LB MIN.
8. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 255°C~265°C (5~10 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191.

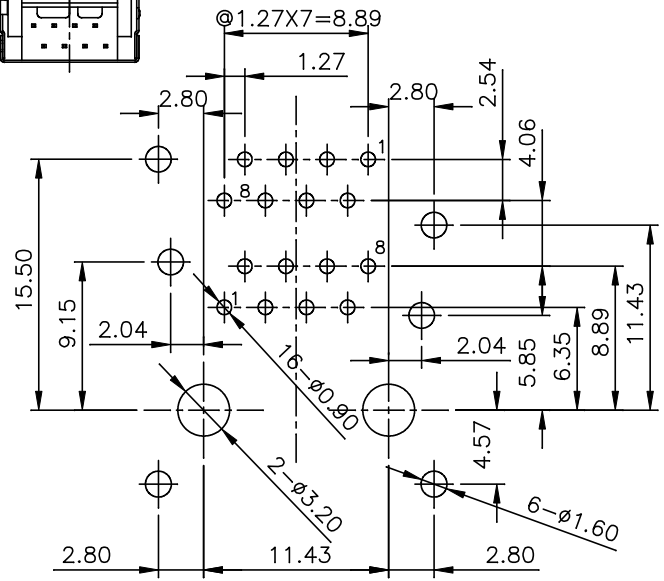

PC BOARD LAYOUT T=1.60mm
COMPONENT SIDE SHOWN
TOLERANCES±0.05mm

E5908-4V0S54-L	30u"
PART NO.	Au PLATING

DETACHED LISTS	MM (INCH)		RoHS Compliant	Pulse Electronics				
	TOLERANCES EXCEPT AS NOTED							
	MM		TITLE STAMPED PIN III W/SHIELD JACK, 2X1					
	.0 ± 0.25	±						
	.00 ± 0.20	±						
	.000 ± 0.10	±						
	ANGLES ± 1°		DFTO :	ELLA	DRAWING NO.	CE5908-4V0S5X-L		SIZE
 THIRD ANGLE PROJECTION		DATE :	11/07/2012	/PART NO.	E5908-4V0S54-L		A3	1
		SCALE :	1.5:1	DO NOT SCALE DRAWING		SHEET		