

EC3032, Encapsulated Precision Pt Temperature Sensor (e-Motor-Sensor)

Temperature range -50 °C to +200 °C, temporary up to +250 °C

- Robust semi-rigid protection
- Internal protection IP67 and IP68
- Pt1000 standard in F 0.3 (B)
- Wide operation range: -50 °C to 200 °C

The Encapsulated Precision Temperature Sensor EC3032 was originally designed as a precise, robust temperature sensor for high-end industrial e-motors. Its properties make it the ideal sensing solution in e-motors, industrial automation, analytical equipment, or EV charging plugs. The EC3032 is a standard product.

In principle, the products can also be used in automotive applications, in this case Heraeus will check upon the request of the customer, whether additional requirements can be met (e.g. IMDS, PPAP).

Nominal Resistance R_0 [Ω]	Tolerance Class	Order Number	Packaging
Pt1000	F 0.3 (B) according to DIN EN 60751	5016951	Plastic bag

Temperature Range of Tolerance Class

Tolerance Class F 0.3 (B) -50 °C to +200 °C

Temporary up to 250 °C (up to 50 hours)

Temperature Coefficient

TCR = 3850 ppm/K

Response Time (Water $v = 0.3$ m/s)

Typical response time $t_{0.5} = 3.1$ s
 $t_{0.9} = 8.1$ s

Measuring Current

Pt1000 Ω: 0.1 to 0.3 mA
 (self-heating has to be considered)

Long-Term Stability of the Sensor Element

The drift of the resistance value at 0 °C after a storage for 1000 hours in air at the declared upper temperature limit is not more than the tolerance value of the declared tolerance class according DIN EN 60751.

Self-Heating of the Sensor Element

0.4 K/mW at 0 °C

Connection Technology

Crimping, Welding, Soft Soldering, Brazing, Clamping




Image for illustration purposes only

EC3032, Encapsulated Precision Pt Temperature Sensor (e-Motor-Sensor)

Temperature range -50 °C to +200 °C, temporary up to +250 °C

Housing

Semi-rigid fluorocarbon
Diameter = 3.2 +0.2/-0.4 mm
Length LH = 30 ±5 mm

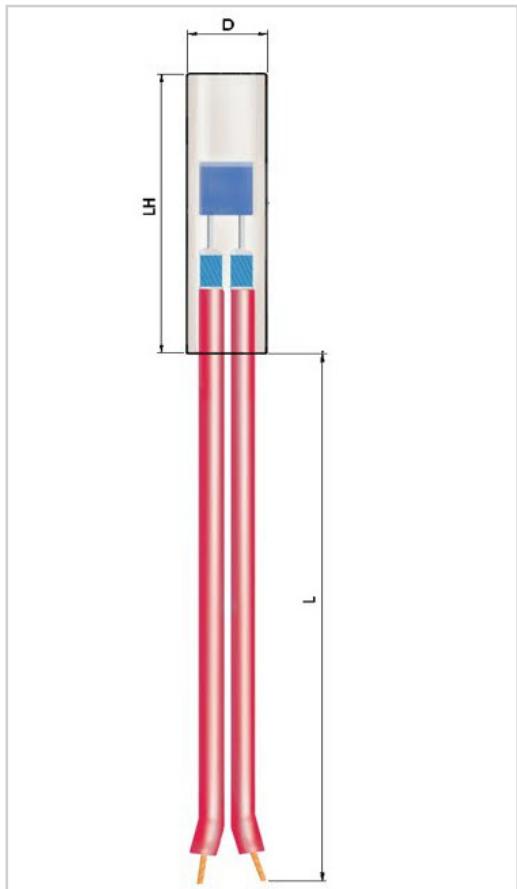

Internal Protection

IP67 and IP68 according to DIN EN 60529

Cable

PTFE insulated, 24AWG (0.24 mm²) stranded Ni plated Cu
Total Length L = 410 ±10 mm

Cable Resistance

0.081 Ω/m (0.025 Ω/ft) per strand

Cable Pull Force

Approximately 100 N, measured between cables and sensor housing at room temperature

Dielectric Strength of the Sensor Head

6KV AC, 60 sec

Customized Options available for High Volume Application

- Wire length L
- Sensor housing length LH
- Sensor housing diameter D
- Sensor resistance
- Sensor tolerances
- Connectors

Image for illustration purposes only

Application Examples

- E-motor and stator protection
- Industrial automation
- Analytic equipment
- Charging connectors



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany