

12		11		10		9		8		7		6		5		4		3		2		1														
ITEM NUMBER		CKT. SIZE	DIM."A"		DIM."B"		DIM."C"		TERMINAL PLATING		CLIP PLATING		STATUS		NOTE: 1) MATERIAL: HOUSING MATERIAL:30% GLASS-FILIED NYLON 4/6, U.L.94V-0, COLOR: BLACK. TERMINAL MATERIAL ALLOY 151. 2) FINISH: 2= .000100/(.00254) MIN. TIN OVER .000050/(.00127) MIN. NICKEL. 3= .000030/(.00076) MIN. SELECT GOLD IN CONTACT AREA. OVER .000050/(.00127) MIN NICKEL. 4= .000100/(00254) MIN SELECT SILVER IN CONTACT AREA .000100/(.00254) MIN. SELECT TIN ON SOLDER TAILS OVER .000050/(.00127) MIN NICKEL. 3) PRODUCT SPECIFICATION: PS-42815-001. 4) PACKAGING INFORMATION SEE MOLEX PACKING SPEC. PK-42820-910 5) PART MATES WITH MOLEX RECEPTACLE *42816-***2 WITH TPA. 6) PART IS DESIGNED IN METRIC. 7) AN "X" IN FRONT OF THE ITEM NUMBER INDICATES THE PART IS NOT TOOLED. 8) PARTS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE 9) WHEN USING OVERALL TIN PLATED TERMINALS: FOR APPLICATIONS INVOLVING VIBRATION AND/OR TERMINAL CYCLING, MOLEX STRONGLY RECOMMENDS THE USE OF NYE LUBRICANT (NYOGEL 760G) ON THE MATING SURFACES OF THE TERMINAL. 10) PARTS CONFORMS TO CLASS 'B' REQUIRMENTS OF COSMETIC SPECIFICATIONS PS-45499-002 11) FOR TAPE AND REEL PACKAGING REFER TO PK-45986-004 12) BOARD CLIP HOLE MAY OR MAY NOT BE PLATED. REFER TO CHART FOR PLATED / UNPLATED CLIPS. 13) REFER AS-42815-001 FOR TIN PLATED TERMINALS RECOMMENDED LUBRICATION PROCEDURE. 14) FOR PN 42820**9* PLEASE REFER TO MOLEX PACAKAGING SPEC. 428204294-PK.																					
H	42820-2213	2	.138/(3.50)		.823/(20.90)		.071/(1.80)		SELECT GOLD IN CONTACT AREA (SEE LEGEND)		ACTIVE																									
	42820-2313	2	.138/(3.50)		.823/(20.90)		N/A																													
	42820-2223	2	.201/(5.10)		.823/(20.90)		.102/(2.60)																													
	42820-2233	2	.201/(5.10)		.823/(20.90)		.134/(3.40)																													
	42820-2243	2	.327/(8.30)		.823/(20.90)		.259/(6.58)																													
G	42820-3213	3	.138/(3.50)		1.217/(30.90)		.071/(1.80)		SELECT MATTE TIN ON SOLDER TAILS		ACTIVE																									
	42820-3228	3	.138/(3.50)		1.217/(30.90)		.102/(2.60)																													
	42820-3223	3	.201/(5.10)		1.217/(30.90)		.102/(2.60)																													
	42820-3233	3	.201/(5.10)		1.217/(30.90)		.134/(3.40)																													
	42820-3243	3	.327/(8.30)		1.217/(30.90)		.259/(6.58)																													
F	42820-4213	4	.138/(3.50)		1.610/(40.90)		.071/(1.80)		SELECT SILVER IN CONTACT AREA (SEE LEGEND)		ACTIVE																									
	42820-4223	4	.201/(5.10)		1.610/(40.90)		.102/(2.60)																													
	42820-4233	4	.201/(5.10)		1.610/(40.90)		.134/(3.40)																													
	42820-4243	4	.327/(8.30)		1.610/(40.90)		.259/(6.58)																													
	42820-5213	5	.138/(3.50)		2.004/(50.90)		.071/(1.80)																													
E	42820-5223	5	.201/(5.10)		2.004/(50.90)		.102/(2.60)		SELECT MATTE TIN ON SOLDER TAILS		ACTIVE																									
	42820-5233	5	.201/(5.10)		2.004/(50.90)		.134/(3.40)																													
	42820-5243	5	.327/(8.30)		2.004/(50.90)		.259/(6.58)																													
	42820-6213	6	.138/(3.50)		2.398/(60.90)		.071/(1.80)																													
	42820-6223	6	.201/(5.10)		2.398/(60.90)		.102/(2.60)																													
D	42820-6233	6	.201/(5.10)		2.398/(60.90)		.134/(3.40)		SELECT SILVER IN CONTACT AREA (SEE LEGEND)		ACTIVE																									
	42820-6243	6	.327/(8.30)		2.398/(60.90)		.259/(6.58)																													
	42820-2214	2	.138/(3.50)		.823/(20.90)		.071/(1.80)																													
	42820-2224	2	.201/(5.10)		.823/(20.90)		.102/(2.60)																													
	42820-2234	2	.201/(5.10)		.823/(20.90)		.134/(3.40)																													
C	42820-2244	2	.327/(8.30)		.823/(20.90)		.259/(6.58)		SELECT MATTE TIN ON SOLDER TAILS		ACTIVE																									
	42820-2314	2	.138/(3.50)		.823/(20.90)		N/A																													
	42820-3214	3	.138/(3.50)		1.217/(30.90)		.071/(1.80)																													
	42820-3224	3	.201/(5.10)		1.217/(30.90)		.102/(2.60)																													
	42820-3234	3	.201/(5.10)		1.217/(30.90)		.134/(3.40)																													
B	42820-3244	3	.327/(8.30)		1.217/(30.90)		.259/(6.58)		SELECT SILVER IN CONTACT AREA (SEE LEGEND)		ACTIVE																									
	42820-3314	3	.138/(3.50)		1.217/(30.90)		N/A																													
	42820-4214	4	.138/(3.50)		1.610/(40.90)		.071/(1.80)																													
	42820-4224	4	.201/(5.10)		1.610/(40.90)		.102/(2.60)																													
	42820-4234	4	.201/(5.10)		1.610/(40.90)		.134/(3.40)																													
A	42820-4244	4	.327/(8.30)		1.610/(40.90)		.259/(6.58)		SELECT MATTE TIN ON SOLDER TAILS		ACTIVE																									
	42820-5214	5	.138/(3.50)		2.004/(50.90)		.071/(1.80)																													
	42820-5224	5	.201/(5.10)		2.004/(50.90)		.102/(2.60)																													
	42820-5234	5	.201/(5.10)		2.004/(50.90)		.134/(3.40)																													
	42820-5244	5	.327/(8.30)		2.004/(50.90)		.259/(6.58)																													
LEGEND :	CIRCUIT SIZE (2-6)		A-42820 - * * *		PLATING		2 OR 9 = OVERALL BRIGHT TIN OVER NICKEL		3 OR 8 = SELECT GOLD IN CONTACT AREA		SELECT MATTE TIN ON SOLDER TAILS OVER NICKEL		4 = SELECT SILVER IN CONTACT AREA		SELECT MATTE TIN ON SOLDER TAILS OVER NICKEL		MOUNTING OPTION		P.C. BOARD THICKNESS		1 = FLANGES (SEE DWG SDA-42820-*1**)		2 = RETENTION CLIP		3 = NO RETENTION CLIP		1 = .062/(1.57) NOMINAL		2 = .093/(2.36) NOMINAL		3 = .125/(3.18) NOMINAL		4 = .250/(6.35) NOMINAL		9 = .062/(1.57) NOMINAL WITH 428204294-PK	
	42820-22**		42820-32**		42820-52**		42820-62**																													
	42820-22**		42820-32**		42820-52**		42820-62**																													
DOCUMENT STATUS		P1	RELEASE DATE		2021/12/07		07:18:05																													
12		11		10		9		8		7		6		5		4		3		2		1														

12		11		10		9		8		7		6		5		4		3		2		1	
ITEM NUMBER		CKT. SIZE	DIM."A"		DIM."B"		DIM."C"		TERMINAL PLATING	CLIP PLATING	STATUS												
H	42820-2212	2	.138/(3.50)		.823/(20.90)		.071/(1.80)		OVERALL BRIGHT TIN	NONE	PLANNED FOR OBSOLESCENCE	SEE NOTE 11											
	42820-2219	2	.138/(3.50)		.823/(20.90)		.071/(1.80)																
	42820-2222	2	.201/(5.10)		.823/(20.90)		.102/(2.60)																
	42820-2232	2	.201/(5.10)		.823/(20.90)		.134/(3.40)																
	42820-2239	2	.201/(5.10)		.823/(20.90)		.134/(3.40)																
	42820-2242	2	.327/(8.30)		.823/(20.90)		.259/(6.58)																
G	42820-3212	3	.138/(3.50)		1.217/(30.90)		.071/(1.80)																
	42820-3222	3	.201/(5.10)		1.217/(30.90)		.102/(2.60)																
	42820-3229	3	.201/(5.10)		1.217/(30.90)		.102/(2.60)																
	42820-3232	3	.201/(5.10)		1.217/(30.90)		.134/(3.40)																
	42820-3242	3	.327/(8.30)		1.217/(30.90)		.259/(6.58)																
	42820-4212	4	.138/(3.50)		1.610/(40.90)		.071/(1.80)																
F	42820-4312	4	.138/(3.50)		1.610/(40.90)		N/A																
	42820-4222	4	.201/(5.10)		1.610/(40.90)		.102/(2.60)																
	42820-4232	4	.201/(5.10)		1.610/(40.90)		.134/(3.40)																
	42820-4242	4	.327/(8.30)		1.610/(40.90)		.259/(6.58)																
	42820-5212	5	.138/(3.50)		2.004/(50.90)		.071/(1.80)																
	42820-5222	5	.201/(5.10)		2.004/(50.90)		.102/(2.60)																
	42820-5232	5	.201/(5.10)		2.004/(50.90)		.134/(3.40)																
	42820-5242	5	.327/(8.30)		2.004/(50.90)		.259/(6.58)																
	42820-6212	6	.138/(3.50)		2.398/(60.90)		.071/(1.80)																
	42820-6222	6	.201/(5.10)		2.398/(60.90)		.102/(2.60)																
	42820-6229	6	.201/(5.10)		2.398/(60.90)		.102/(2.60)																
	42820-6232	6	.201/(5.10)		2.398/(60.90)		.134/(3.40)																
	42820-6242	6	.327/(8.30)		2.398/(60.90)		.259/(6.58)																
	42820-2332	2	.201/(5.10)		.823/(20.90)		N/A																
	42820-2342	2	.327/(8.30)		.823/(20.90)		N/A																



Technical drawing of a component, likely a connector or terminal block, showing dimensions and labels. The drawing includes a side view and a top view. Dimensions are provided in inches and millimeters (in parentheses). Labels include REF, H, G, and F.

Dimensions:


- 1.693 REF (43.00)
- .299 REF (7.60)
- .634 REF (16.10)
- .138 REF (3.50)
- .868 REF (22.04)

Labels:

- H
- G
- F

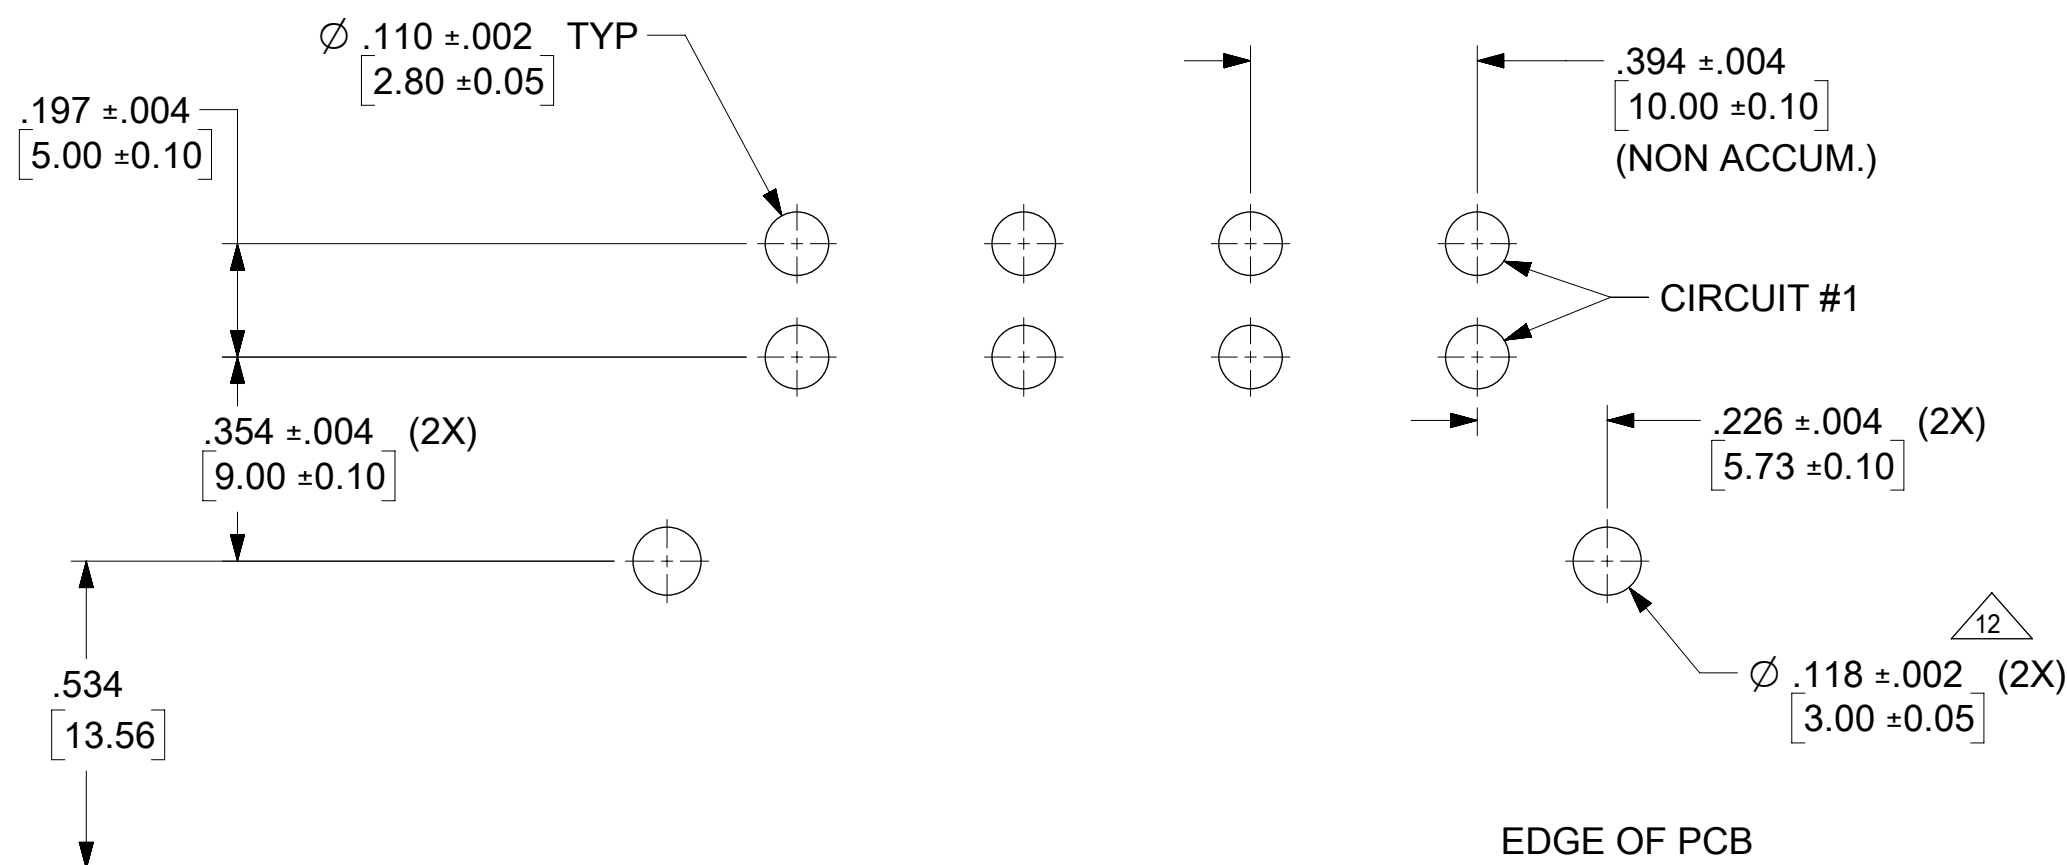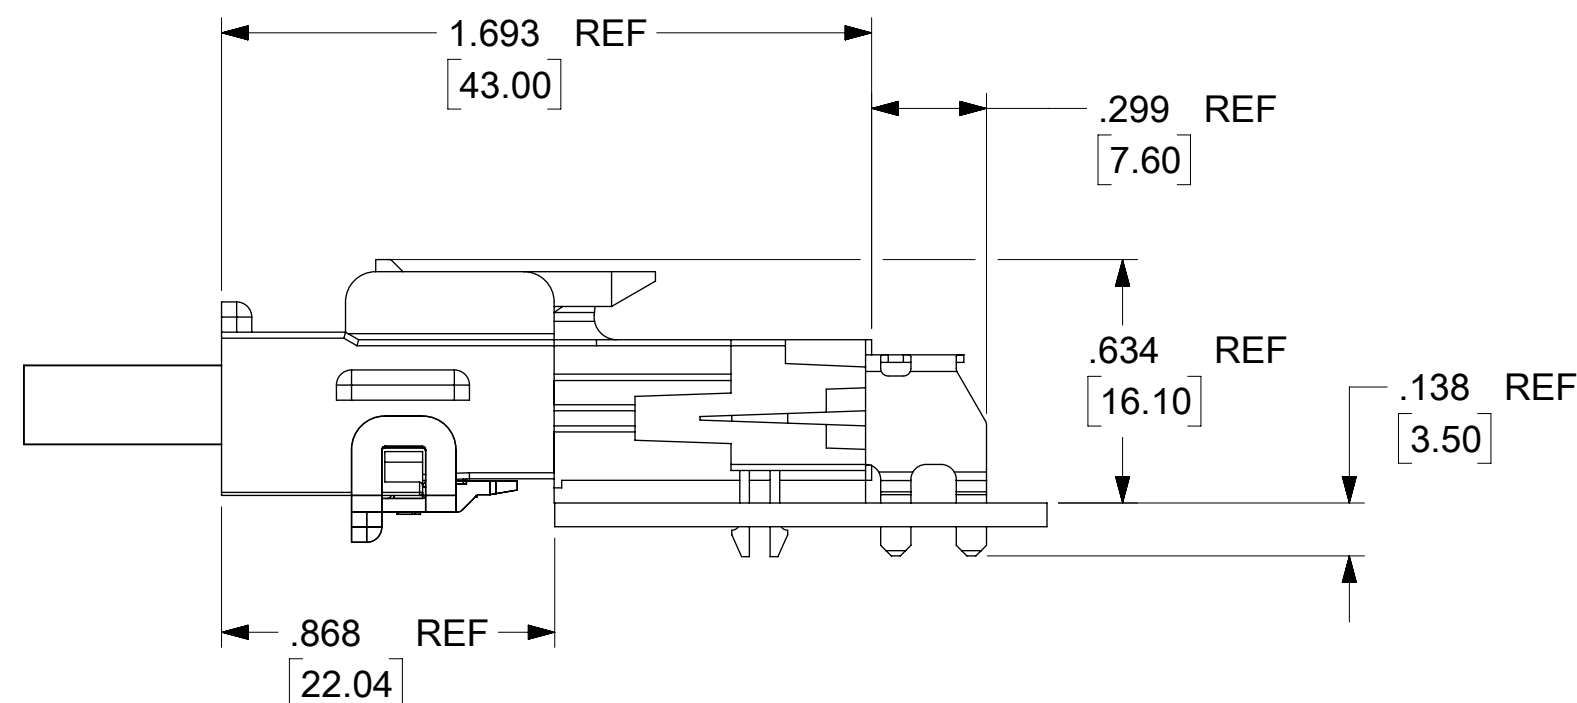

RECOMMENDED P.C. BOARD PLATED -THRU HOLE LAYOUT
(4 CKT. SHOWN FOR REF.)

					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS mm SCALE 3:1 GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 0.5 ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 0.13 1 PLACE ± 0.25 0 PLACES ± CURRENT REV DESC: EC NO: 687922 DRWN: SHRUTJ 2021/12/06 CHK'D: SHRUTJ 2021/12/07 APPR: ISHWARG 2021/12/07 INITIAL REVISION: DRWN: RFC_PLMIMP 2018/11/02 APPR: JCOMERCI 2001/07/18 molex MINI-FIT SR. RIGHT ANGLE HEADER ASSEMBLY PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER SDA-42820-0002 DOC TYPE PSD DOC PART 001 REVISION J1 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION  DRAWING C-SIZE SERIES 42820 MATERIAL NUMBER SEE CHART CUSTOMER GENERAL MARKET SHEET NUMBER 2 OF 2									
DOCUMENT STATUS P1 RELEASE DATE 2021/12/07 07:18:05														