





DB UNLIMITED

Part Number:	DRAWN CJ	10/19/2021
	CHECKED P.D.	10/20/2021
	APPROVED J.S.	10/20/2021
Description: Waterproof Microphone		
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com		



Top View

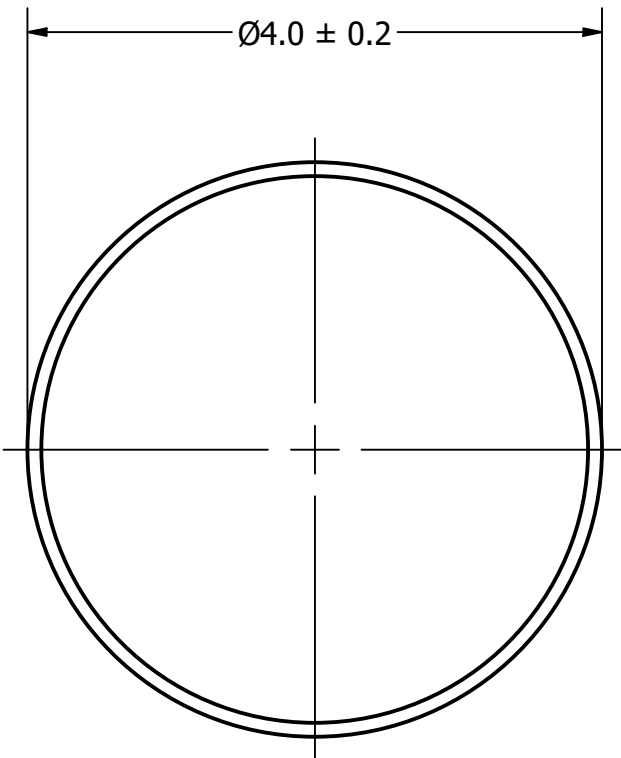

Side View

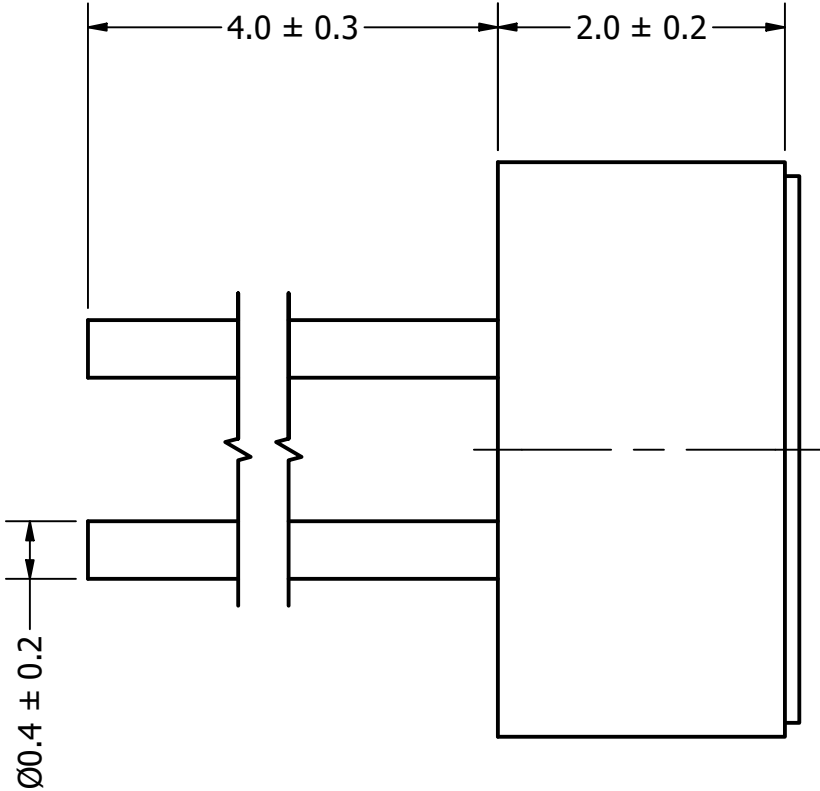

Bottom View

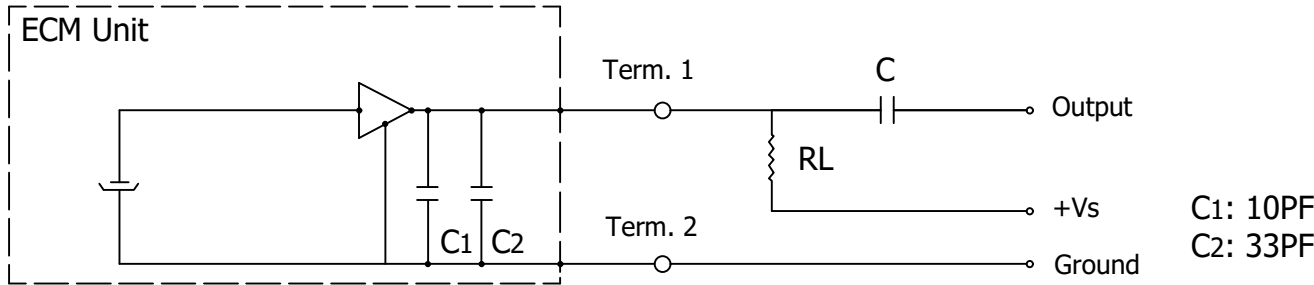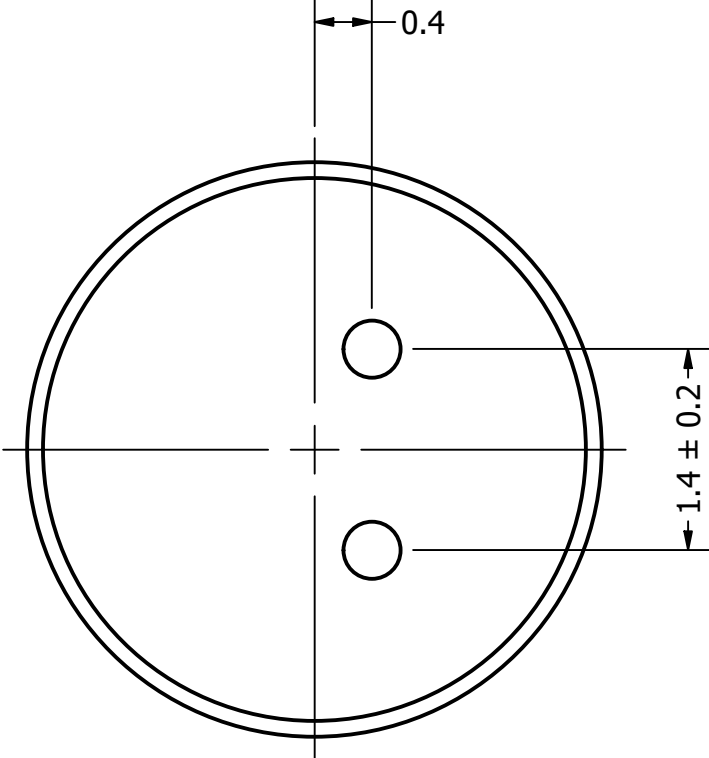

Items	Specifications	Conditions				
Directivity	Omnidirectional					
Sensitivity	-42	dB				
Frequency Range	50 ~ 16,000	Hz				
Rated Voltage	2	V				
Voltage Range	2 ~ 10	V				
Output Impedance	2,200	Ω				
Max. Rated Current	0.5	mA				
Storage Temperature	-25 ~ +70	°C				
Operating Temperature	-20 ~ +60	°C				
Signal to Noise Ratio	60	dB				
Mount Type	Thru Hole					
Connection Method	PC Pins					
			REVISION HISTORY			
			REV	DESCRIPTION	DATE	APPROVED
				Released from Engineering	10/21/2013	J.S.
			1	Updated to new template, updated pin spacing	10/20/2021	P.D.
			NOTES			
			1) All dimensions are in mm unless otherwise noted			
			2) All tolerances are ± 0.5 mm unless otherwise noted			
			3) All parts meet RoHS			
			4) Subject to change or redrawn without notice			