

NOTE:

MATERIAL

HOUSING: PA66 UL94V-0, BLACK
 CONTACT: BRASS
 NUT: BRASS
 O-RING: EPDM, BLACK

FINISH



CONTACT: 10 μ " GOLD PLATED
 NUT: NICKEL

ELECTRICAL

RATED CURRENT: 4A
 RATED VOLTAGE: 250V
 INSULATOR RESISTANCE: 100 M Ω hms MIN.
 CONTACT RESISTANCE: 10 m Ω hms MAX.
 WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
 MAX WIRE AWG: 22 AWG

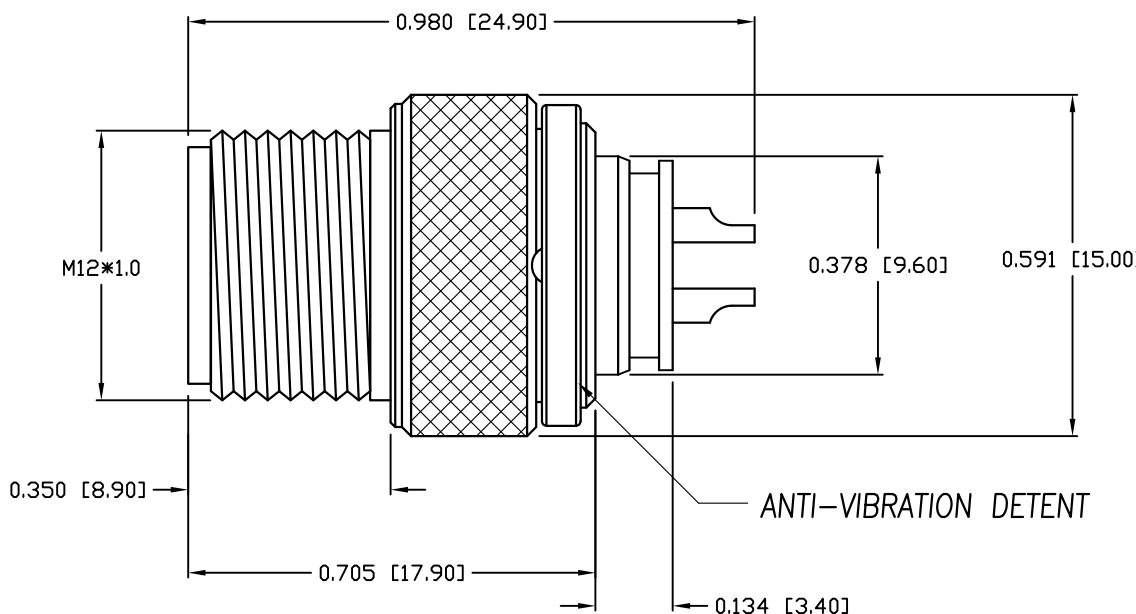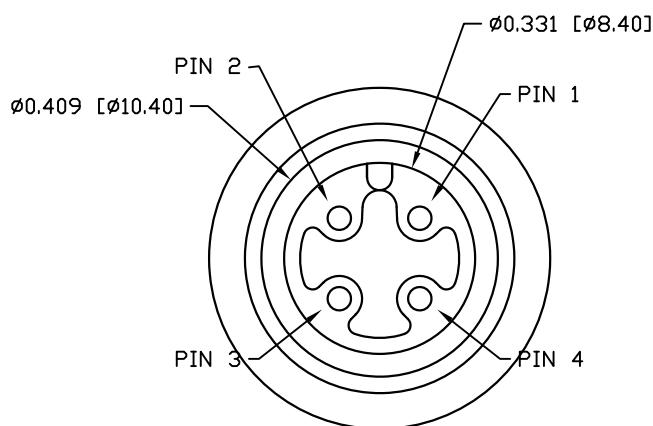

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE
 THE PROPERTY OF NorComp AND SHALL NOT
 BE REPRODUCED, COPIED OR USED AS THE
 BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
 M. SIGMON
 DATE:
 08/04/2016

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS SHEET 1 OF 1 REV 3

DWG NO. 858VA04-103RLU4