


Specification Sheet

Part Number: T120MR9H4

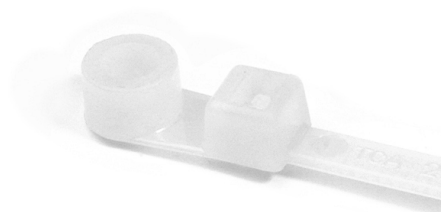

Screw mount style creates low insertion and high extraction force. Choose from several tensile strengths and lengths to accommodate a range of applications.

1-Piece Cable Tie/Screw Mount, 15.6" Long, #1/4 Screw, 4.02" Max Bundle Dia, 120lb, PA66, Natural, 500/pkg

Article Number	113-00018
-----------------------	-----------

Type	T120MR
-------------	--------

Color	Natural (NA)
--------------	--------------

Quantity Per	bag
---------------------	-----

Product Description	One-piece Screw Mount Cable Ties fasten with a screw or bolt to provide secure routing of cable bundles. Multiple configurations are available to cover a range of bundle sizes and tensile strengths.
----------------------------	--

Short Description	1-Piece Cable Tie/Screw Mount, 15.6" Long, #1/4 Screw, 4.02" Max Bundle Dia, 120lb, PA66, Natural, 500/pkg
--------------------------	--

Global Part Name	T120MR-PA66-NA
-------------------------	----------------

Minimum Tensile Strength (Imperial)	120.0
Minimum Tensile Strength (Metric)	535.0
Length L (Imperial)	15.6
Length L (Metric)	395.0
Fixation Method	Fixing hole
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.3
Width W (Metric)	7.6
Bundle Diameter Min (Imperial)	0.20
Bundle Diameter Min (Metric)	5.0
Bundle Diameter Max (Imperial)	4.02
Bundle Diameter Max (Metric)	102.0
Thickness T (Imperial)	0.07

Thickness T (Metric)	1.8
Height H (Imperial)	.31
Height H (Metric)	7.90
Mounting Hole Diameter D (Imperial)	0.26
Mounting Hole Diameter D (Metric)	6.5 mm
Mounting Hole Diameter D Max (Metric)	6.5
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL 94 V-2
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
ROHS Compliant	Yes
UL Recognized (US)	Yes
UL Listed (US and Canada)	Yes
UL Recognized (US and Canada)	Yes
UL Listed (US)	Yes

Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988