


[AudioLarm II Series](#)

MW-V09-550-S

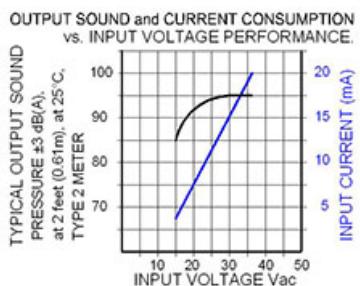

More Information

 [UL Recognized](#)


 [RoHS Compliant](#)

## Specifications

<b>Mounting</b>	Panel Mount with Volume Control
<b>Operating Mode</b>	Medium Loud Extra Fast Warble Tone
<b>Operating Voltage</b>	15-36 Vac/dc
<b>Operating Frequency</b>	2600 $\pm$ 250 Hz to 3000 $\pm$ 250 Hz
<b>Typical Operating Current</b>	5 mA at 15 Vac/dc 20 mA at 36 Vac/dc
<b>Typical Sound Pressure</b>	85 $\pm$ 5 dB(A) at 15 Vac/dc at 24 inches (61 cm), at 25°C 95 $\pm$ 5 dB(A) at 36 Vac/dc at 24 inches (61 cm), at 25°C
<b>Termination</b>	Quick Connect Blades with Screws
<b>Termination Strength</b>	Pull test with a maximum of 22 pounds (10 kg) load
<b>Operating Temperature</b>	-20°C to +65°C
<b>Storage Temperature</b>	-40°C to +85°C
<b>Surge Voltage</b>	20% over maximum rated voltage for less than 5 minutes
<b>Reverse Voltage Protection</b>	To the maximum operating voltage
<b>Construction Materials</b>	Case- Plastic _NORYL_ N-190, Flame Retardant UL 94-VO, Black Internal Circuit- Audio-oscillator and piezoelectric driver Potting- 2 parts epoxy resin or silicone, black Diaphragm- Stainless Steel 304
<b>Gasket</b>	Gasket (sold separately) 0.062" thick, 60 Durometer Neoprene ASTM B117 Certified - Withstands exposure to salt spray for 300 hours IP 68 Certified - Withstands water submergence and dust exposure Humidity- 95% relative humidity at +40°C continuously for 100 hours. Vibration- Withstands vibration between 0 and 55 Hz. on all axes.
<b>Construction Materials</b>	10 years under normal operating conditions.
<b>Life Expectancy</b>	For a period of two years from the date of manufacture under normal operating conditions.
<b>Warranty</b>	
<b>Terms and Conditions of Sale</b>	<a href="#">Link here</a>


## Dimensions

REAR




TOLERANCES ARE:  $\pm 0.03$  in.  
 $[\pm 0.76\text{mm}]$

SIDE

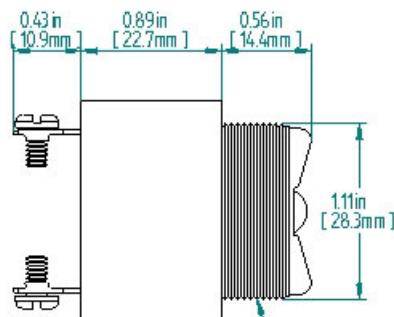

— 1.125-24 UNF THREADS  
FOR REFERENCE ONLY

## RING



## FRONT

