

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

2162731043

Status:


Active

Overview:

SL Modular Connectors

Description:

SL Male-to-Pigtail Off-the-Shelf (OTS) Cable Assembly, Positive Lock, Single Row, 300.00mm Length, Tin (Sn) Plating, 4 Circuits, Black

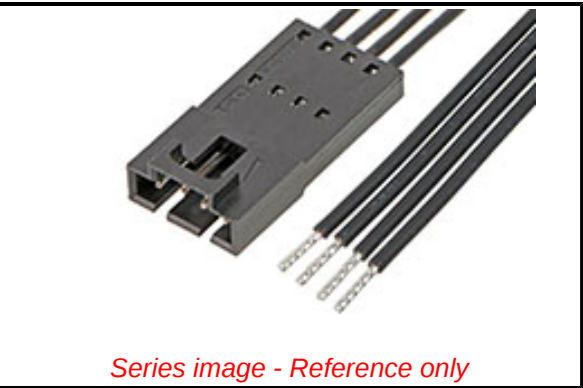

Documents:

[3D Model](#)

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Cable Assemblies
Series	216273
Application	Signal, Wire-to-Wire
Assembly Configuration	Single Ended Connector
Connector to Connector	SL-to-Pigtail
Overmolded	No
Overview	SL Modular Connectors
Product Name	SL
Type	Discrete Wire Assembly
UPC	193264731572
Physical	
Cable Length	300.00mm
Circuits (Loaded)	4
Color - Resin	Black
Gender	Male-Pigtail
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Net Weight	6.890/g
Number of Rows	1
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Single Ended	Yes
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.63mm max.
Wire Size AWG	22
Wire/Cable Type	UL 11028
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	600V AC/DC
Material Info	
Reference - Drawing Numbers	
Sales Drawing	2162731040-000

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

Green Image

REACH SVHC

Not Contained Per - D(2021)10043-DC (17 Jan 2022)

Halogen-Free

Not Low-Halogen

Status

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

216273 Series

Mates With

SL Crimp Housing Versions A, G and D Only [70066](#) . SL Insulation Displacement Connector Assembly, Version G Housing [70400](#) . SL Single Row Receptacle, Version G [70430](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION