

10

9

8

7

6

5

4

3

2

1

F


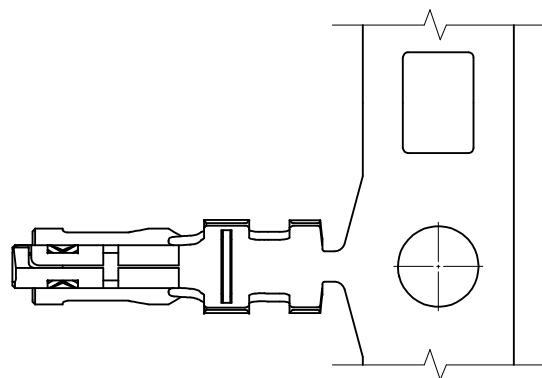
E

D

C


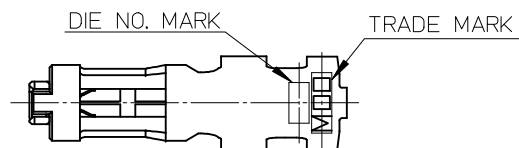
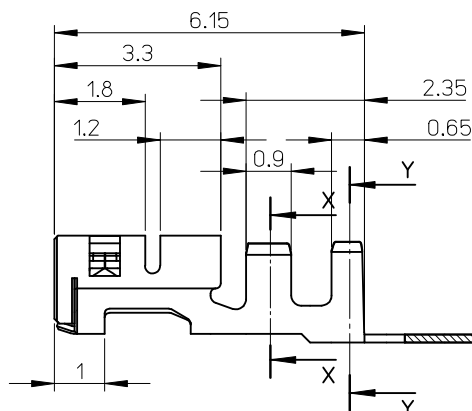

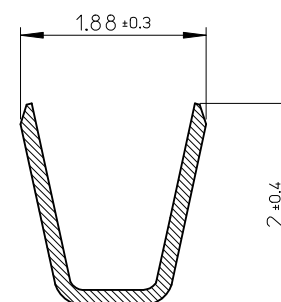
B

A



NOTES

1. 使用材料: 銅合金、錫メッキ($t=0.15$)
MATERIAL: COPPER ALLOY, PRE-TINNED ($t=0.15$)
2. 適合ハウジング: 505151シリーズ
APPLICABLE HOUSING: 505151 SERIES
3. ELV及びRoHS適合
ELV AND RoHS COMPLIANT
4. アプリケーション仕様書(コネクタ取扱説明書): AS-505151-001/-002
APPLICATION SPECIFICATION (CONNECTOR MANUAL):
5. 製品仕様書: PS-505151-001
PRODUCT SPECIFICATION:
6. 圧着視覚教材(品質要領書): ATS-57427-0000
CRIMPING VISUAL AID:

SECTION X-X
SCALE 20:1SECTION Y-Y
SCALE 20:1

WIRE RANGE
AWG: #22, #24

INSULATION RANGE
Ø1.5 MAX.

RELEASED
EC NO: J2015-0035
2014/06/30
DRWN: MIKEDA01
2014/07/11
CHKD: KASAKAWA
2014/07/15
APPR: NUKITA

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
MIKEDA01	2014/03/03
CHECKED BY	DATE
KASAKAWA	2014/03/04
APPROVED BY	DATE
NUKITA	2014/03/28
MATERIAL NO.	
SEE CHART	
SIZE	
A3	

SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
5051538000		
MATERIAL NO.		
CHAIN FORM		
TITLE		
2.0MM PITCH W/B CONN. REC TERMINAL		
DOCUMENT NO.		
SD-505153-001		
SHEET NO.		
1 OF 1		

9

8

7

6

5

4

3

2