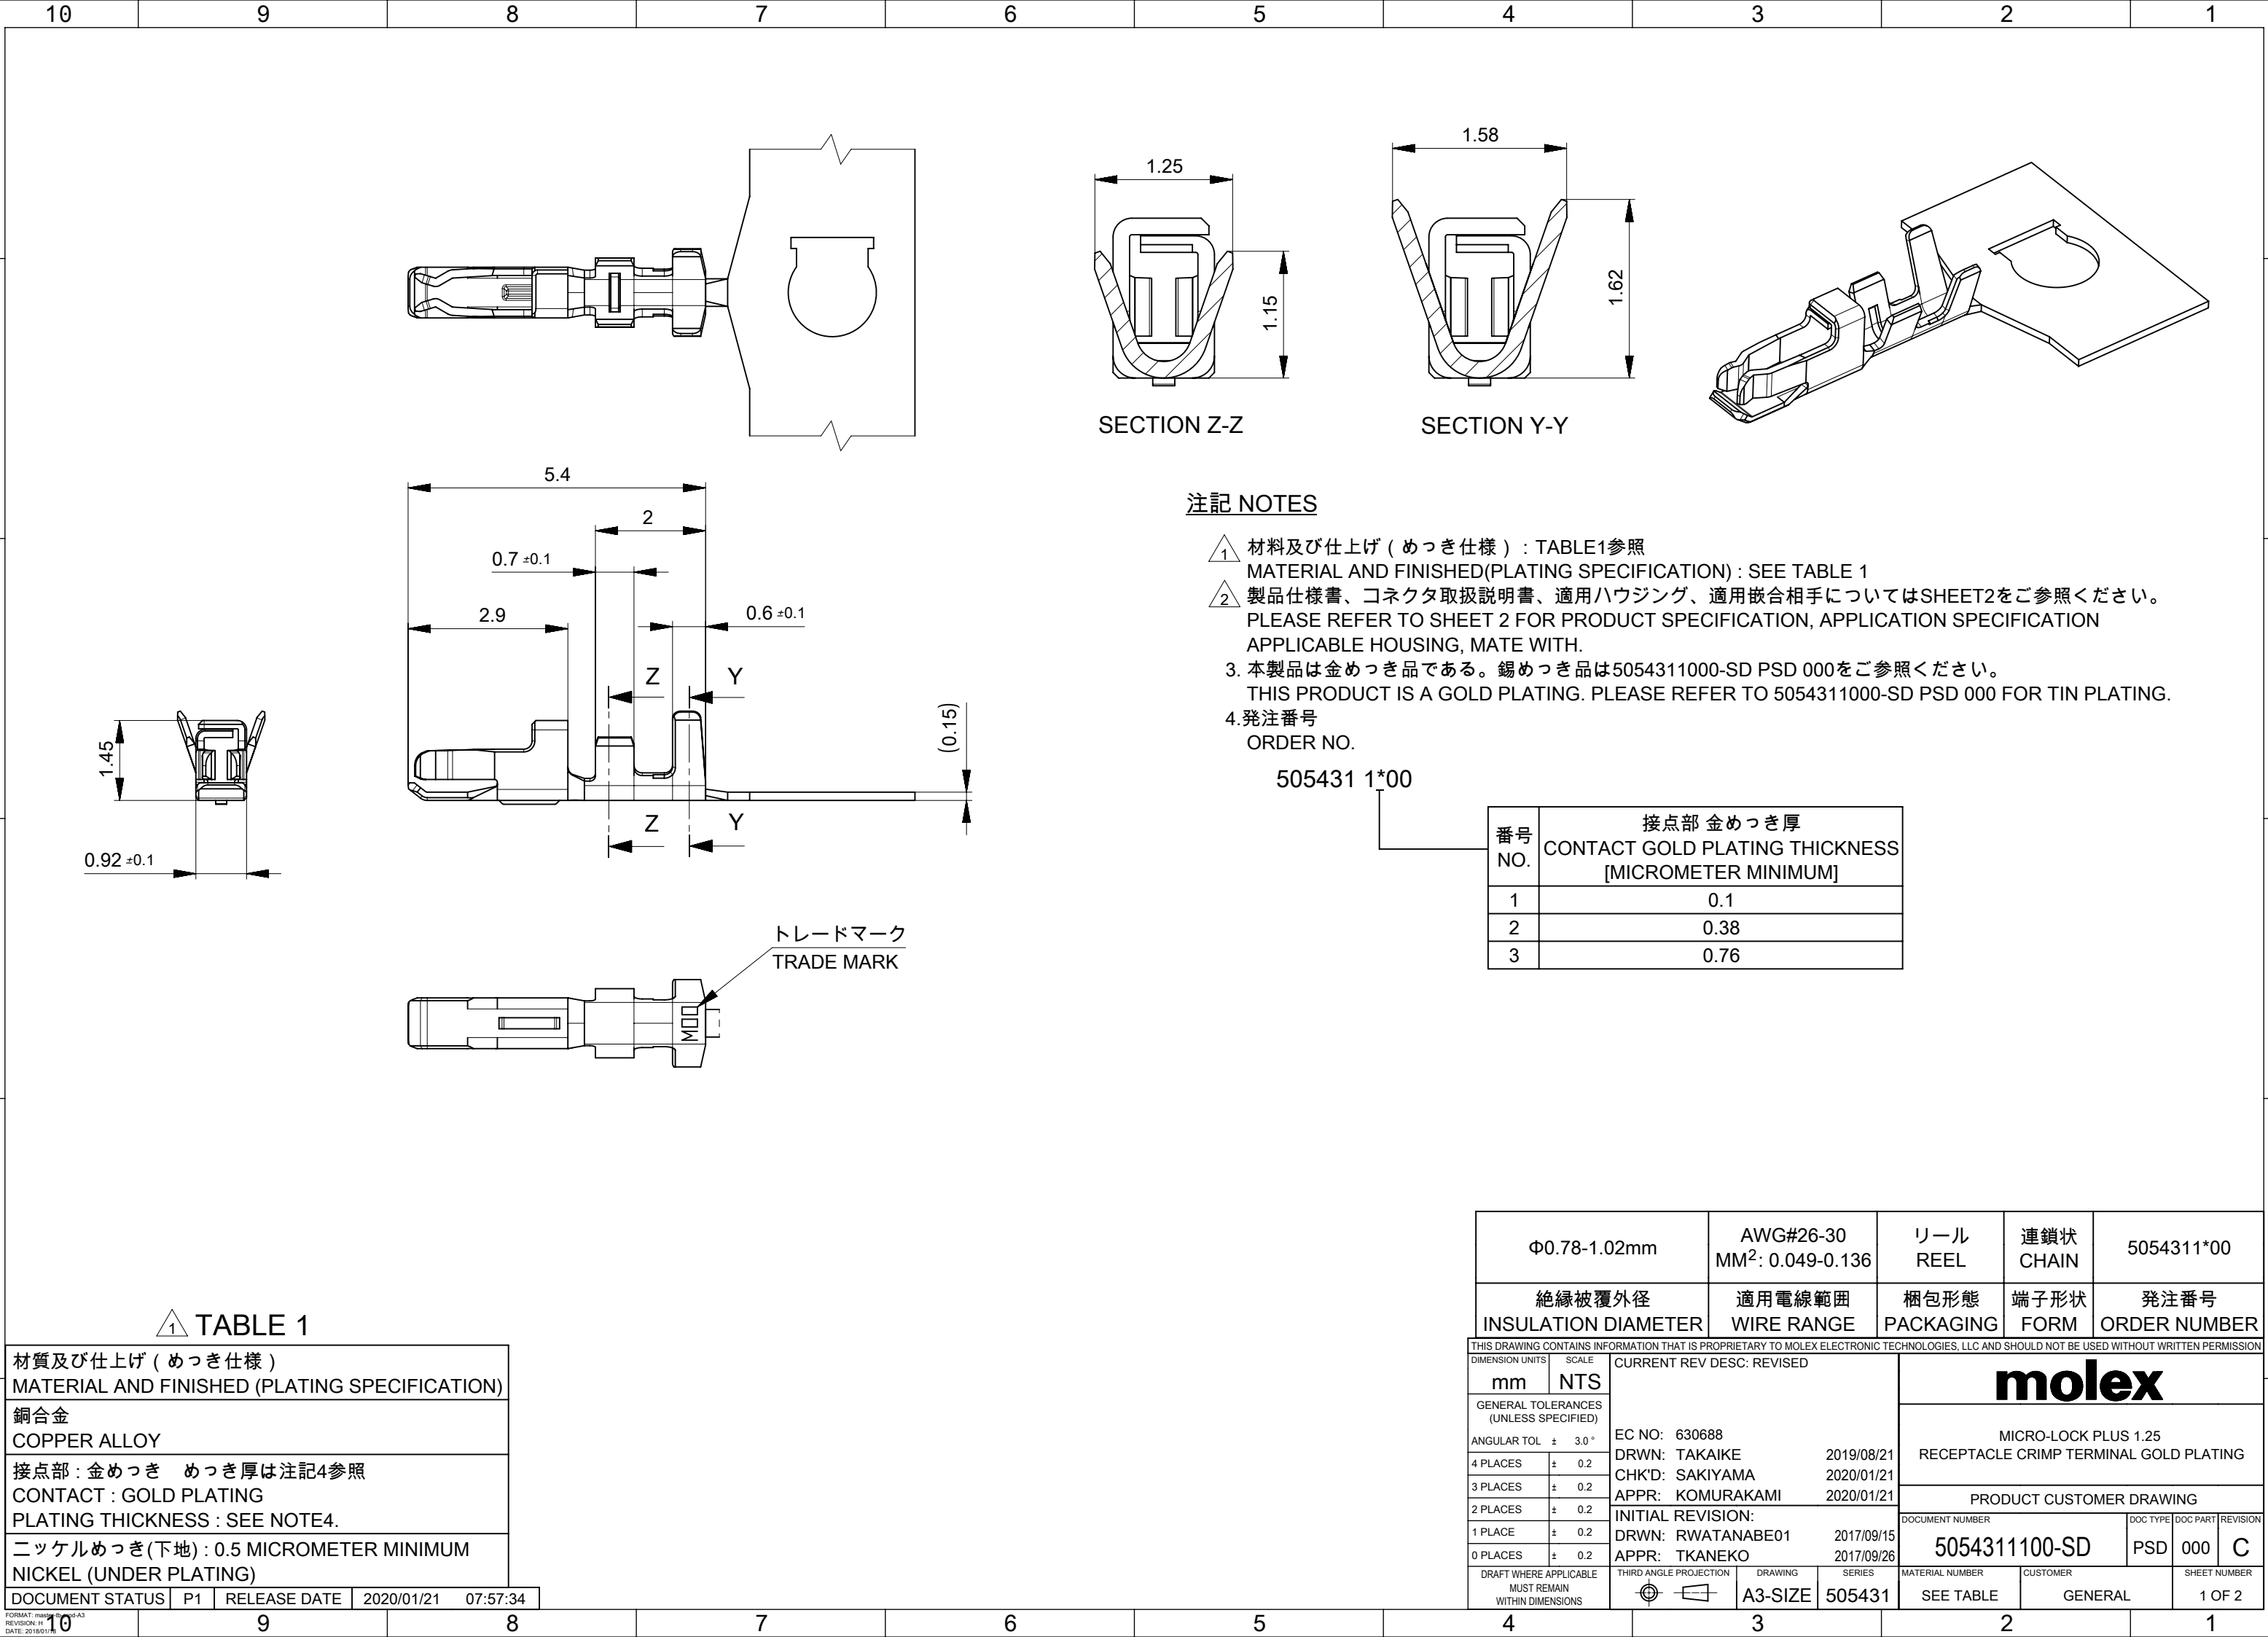




注記 NOTES


- 1 材料及び仕上げ（めっき仕様）：TABLE1参照
MATERIAL AND FINISHED(PLATING SPECIFICATION)：SEE TABLE 1
- 2 製品仕様書、コネクタ取扱説明書、適用ハウジング、適用嵌合相手についてはSHEET2をご参照ください。
PLEASE REFER TO SHEET 2 FOR PRODUCT SPECIFICATION, APPLICATION SPECIFICATION APPLICABLE HOUSING, MATE WITH.
3. 本製品は金めっき品である。錫めっき品は5054311000-SD PSD 000をご参照ください。
THIS PRODUCT IS A GOLD PLATING. PLEASE REFER TO 5054311000-SD PSD 000 FOR TIN PLATING.
- 4.発注番号
ORDER NO.

505431 1*00

番号 NO.	接点部 金めっき厚 CONTACT GOLD PLATING THICKNESS [MICROMETER MINIMUM]
1	0.1
2	0.38
3	0.76

1 TABLE 1

材質及び仕上げ（めっき仕様） MATERIAL AND FINISHED (PLATING SPECIFICATION)				
銅合金 COPPER ALLOY				
接点部：金めっき めっき厚は注記4参照 CONTACT：GOLD PLATING PLATING THICKNESS：SEE NOTE4.				
ニッケルめっき(下地)：0.5 MICROMETER MINIMUM NICKEL (UNDER PLATING)				
DOCUMENT STATUS	P1	RELEASE DATE	2020/01/21	07:57:34

Φ0.78-1.02mm		AWG#26-30 MM ² : 0.049-0.136		リール REEL		連鎖状 CHAIN		5054311*00		
絶縁被覆外径 INSULATION DIAMETER		適用電線範囲 WIRE RANGE		梱包形態 PACKAGING		端子形状 FORM		発注番号 ORDER NUMBER		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS	SCALE	CURRENT REV DESC: REVISED				molex				
mm	NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)						MICRO-LOCK PLUS 1.25 RECEPTACLE CRIMP TERMINAL GOLD PLATING				
ANGULAR TOL ± 3.0 °						PRODUCT CUSTOMER DRAWING				
3 PLACES ± 0.2		EC NO: 630688		2019/08/21		DOCUMENT NUMBER 5054311100-SD				
3 PLACES ± 0.2		DRWN: TAKAIKE		2020/01/21						
2 PLACES ± 0.2		CHK'D: SAKIYAMA		2020/01/21		DOC TYPE PSD				
2 PLACES ± 0.2		APPR: KOMURAKAMI		2020/01/21						
1 PLACE ± 0.2		INITIAL REVISION:				DOC PART 000				
1 PLACE ± 0.2		DRWN: RWATANABE01 2017/09/15								
0 PLACES ± 0.2		APPR: TKANEKO 2017/09/26				REVISION C				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
			A3-SIZE	505431	SEE TABLE		GENERAL		1 OF 2	

2

適用製品及び各種仕様書
APPLICABLE PRODUCTS AND VARIOUS SPECIFICATIONS


梱包仕様書 PACKING SPECIFICATION	5054319200 PS 200
--------------------------------	-------------------

列数 NUMBER OF ROWS		SINGLE			
ローハロゲン対応 LOW HALOGEN COMPLIANT		NOT COMPLIANT		COMPLIANT	
適応ハウジング シリーズ番号 APPLICABLE HOUSING SERIES NUMBER		505565**0*		204532**0*	
適応嵌合相手 MATE WITH	嵌合タイプ MATING TYPE	VERTICAL	RIGHT ANGLE	VERTICAL	RIGHT ANGLE
	シリーズ番号 SERIES NUMBER	505568**** 3,5,8 	505567**** 3,5,8 	204530**8*	204529**8*
製品仕様書 PRODUCT SPECIFICATION		5055650002 PS 000		2045320000-PS PS 001	
取扱説明書 APPLICATION SPECIFICATION		AS-505565-001 (ENGLISH/JAPANESE)			

列数 NUMBER OF ROWS		DUAL	
ローハロゲン対応 LOW HALOGEN COMPLIANT		NOT COMPLIANT	
適応ハウジング シリーズ番号 APPLICABLE HOUSING SERIES NUMBER		505432**0*	
適応嵌合相手 MATE WITH	嵌合タイプ MATING TYPE	VERTICAL	RIGHT ANGLE
	シリーズ番号 SERIES NUMBER	505433**** 2,3,4,5,6,9 	505448**** 3,5,9 
製品仕様書 PRODUCT SPECIFICATION		5054320000 PS 006	
取扱説明書 APPLICATION SPECIFICATION		AS-505432-001 (ENGLISH/JAPANESE)	

製品嵌合図は各"適応嵌合相手"図面参照のこと
MATING VIEW : REFER TO EACH "MATE WITH" PART DRAWING.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC: REVISED		molex			
mm	NTS						
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 630688 DRWN: TAKAIKE 2019/08/21 CHK'D: SAKIYAMA 2020/01/21 APPR: KOMURAKAMI 2020/01/21 INITIAL REVISION: DRWN: RWATANABE01 2017/09/15 APPR: TKANEKO 2017/09/26		MICRO-LOCK PLUS 1.25 RECEPTACLE CRIMP TERMINAL GOLD PLATING			
ANGULAR TOL	± 3.0 °			PRODUCT CUSTOMER DRAWING			
4 PLACES	± 0.2			DOCUMENT NUMBER 5054311100-SD DOC TYPE PSD DOC PART 000 REVISION C			
3 PLACES	± 0.2						
2 PLACES	± 0.2						
1 PLACE	± 0.2	THIRD ANGLE PROJECTION 		DRAWING A3-SIZE		SHEET NUMBER 2 OF 2	
0 PLACES	± 0.2			SERIES 505431		MATERIAL NUMBER SEE TABLE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CUSTOMER GENERAL					